

USB3 VISION CAMERAS

Alvium USB Cameras User Guide

V3.2.2

**Quick links**

- [Alvium USB cameras at a glance](#) on page 14
- [Contact us](#) on page 17
- [Contents](#) on page 18

Read before use

EN - English

Safety

Before using the camera, read these safety instructions. Observe the warnings at all times. Use the camera only as stated in the [Intended use](#) on page 35.

**CAUTION****Risk of burns**

A camera in operation can reach temperature levels which could cause burns.

**CAUTION****Injury by falling cameras or lenses**

A falling camera or lens can cause injury.

**CAUTION****Risk of cuts by sharp edges of lens mounts**

The threads of the lens mount can have sharp edges.

Intended use

Intended use of Allied Vision product is the integration into vision systems by professionals. All Allied Vision product is sold in a B2B setting.

Cameras without closed housings

Cameras without housing or with incomplete housing must be shielded against EMC emission by professionals according to local EMC provisions.

DA - Dansk

Sikkerhed

Læs sikkerhedsanvisningerne, før kameraet bruges. Overhold alle advarsler. Brug kun kameraet som anført i [Intended use](#) på side 35.



FORSIGTIG

Forbrændingsfare

Når kameraet bruges, kan det blive meget varmt og forårsage forbrændinger.



FORSIGTIG

Kvæstelser, hvis kameraet eller linser falder ned

Falder kameraet eller linsen ned, kan dette forårsage kvæstelser.



FORSIGTIG

Fare for snitsår på linsemodulets skarpe kanter

Linsemodulets gevind kan have skarpe kanter.

Tilsigtet brug

Allied Vision produktets tilsigtede brug er en indbygning i et visionssystem, udført af fagfolk. Alle Allied Vision produkter sælges i B2B.

Kameraer uden lukket hus

Kameraer uden hus eller uden komplet hus skal beskyttes mod EMC emissioner iht. lokale EMC bestemmelser.

DE - Deutsch

Sicherheit

Bevor Sie die Kamera benutzen, lesen diese Sicherheitshinweise. Beachten Sie diese Hinweise immer. Verwenden Sie die Kamera nur wie beschrieben in [Intended use](#) auf Seite 35.



VORSICHT

Gefahr von Verbrennungen

Im Betrieb kann die Kamera Temperaturen erreichen, die zu Verbrennungen führen.



VORSICHT

Verletzung durch fallende Kameras oder Objektive

Eine fallende Kamera oder ein fallendes Objektiv kann Verletzungen verursachen.



VORSICHT

Schnitte durch scharfkantige Objektivgewinde

Objektivgewinde können scharfe Kanten haben.

Bestimmungsgemäßer Gebrauch

Allied Vision Produkte sind bestimmt für die Integration in Bildverarbeitungssysteme durch Fachpersonal. Alle Allied Vision Produkte werden in einer B2B-Umgebung verkauft.

Kameras ohne geschlossenes Gehäuse

Für Kameras ohne Gehäuse oder mit unvollständigem Gehäuse muss die Abschirmung gegen EMV-Emissionen gemäß den örtlichen EMV-Bestimmungen durchgeführt werden.

ES - Español

Seguridad

Antes de utilizar la cámara lea estas instrucciones de seguridad. Observe las advertencias en todo momento. Utilice la cámara solo tal y como se estipula en el [Intended use](#) en la página 35.



ATENCIÓN

Riesgo de quemaduras

Una cámara en funcionamiento puede alcanzar temperaturas que podrían provocar quemaduras.



ATENCIÓN

Lesiones en caso de que las cámaras o las lentes se caigan

Si una cámara o una lente se cae puede provocar lesiones.



ATENCIÓN

Riesgo de cortes debido a los bordes afilados del objetivo

Las roscas de los objetivos pueden tener bordes afilados.

Uso previsto

El uso previsto del producto Allied Vision es la integración en el sistema de visión por parte de profesionales. Todos los productos Allied Vision se venden dentro de una relación B2B.

Cámaras sin carcasa cerrada

Las cámaras sin carcasa o con una carcasa incompleta deben protegerse contra las emisiones CEM por parte de profesionales de acuerdo con las disposiciones locales sobre la CEM.

FI - Suomi

Turvallisuus

Lue nämä turvallisuusohjeet ennen kameran käyttöä. Noudata varoituksia joka hetki. Käytä kameraa ainoastaan kohdassa [Intended use](#) sivulla 35 kuvatulla tavalla.



HUOMIO

Palovammojen vaara

Käytössä olevan kameran saavuttamat lämpötilatasot voivat aiheuttaa palovammoja.



HUOMIO

Putoavien kameroiden tai linssien aiheuttamat vammat

Putoava kamera tai linssi voi aiheuttaa vammoja.



HUOMIO

Linssien kiinnikkeiden terävien reunojen aiheuttamien viiltovammojen vaara

Linssin kiinnikkeiden kierteiden reunat voivat olla teräviä.

Käyttötarkoitus

Allied Vision-tuotteen käyttötarkoitus on integrointi kuvajärjestelmiin ammattilaisten toimesta. Kaikki Allied Vision-tuotteet myydään B2B-ympäristössä.

Kamerat, joissa ei ole suljettuja koteloita

Ammattilaisten on suojattava kamerat, joissa ei ole koteloa tai joiden kotelo on epätäydellinen, EMC-päästöiltä paikallisten EMC-määräysten mukaisesti.

FR - Français

Sécurité

Veuillez lire ces consignes de sécurité avant d'utiliser la caméra. Respectez continuellement les avertissements. Utilisez la caméra uniquement comme indiqué sous [Intended use](#), page 35.



ATTENTION

Risque de brûlures

Une caméra en service peut atteindre des niveaux de température susceptibles d'entraîner des brûlures.



ATTENTION

Blessures en cas de chute de caméras ou d'objectifs

La chute d'une caméra ou d'un objectif peut entraîner des blessures.



ATTENTION

Risque de coupures sur les bords tranchants des montures d'objectif

Les filetages des montures d'objectif peuvent présenter des bords tranchants.

Utilisation prévue

L'utilisation prévue du produit Allied Vision est son intégration dans des systèmes de vision par le soin de professionnels. Tout produit Allied Vision est vendu dans un cadre B2B.

Caméras sans boîtier fermé

Les caméras sans boîtier fermé ou à boîtier incomplet doivent être blindées contre les émissions CEM par le soin de professionnels conformément aux dispositions CEM locales.

IT - Italiano

Sicurezza

Leggere queste istruzioni per la sicurezza prima di utilizzare la telecamera. Osservare sempre tutte le avvertenze. Utilizzare la telecamera come descritto alla sezione [Intended use](#) a pagina 35.



ATTENZIONE

Pericolo di ustioni

Durante il funzionamento una telecamera può raggiungere temperature elevate che possono essere causa di ustioni.



ATTENZIONE

Lesioni dovute alla caduta di telecamere o lenti

La caduta di una telecamera o di una lente può causare delle lesioni.



ATTENZIONE

Pericolo di tagliarsi sui bordi affilati degli attacchi della lente

I bordi della filettatura dell'attacco della lente possono essere affilati.

Uso previsto

Il prodotto Allied Vision è concepito per essere integrato in sistemi di monitoraggio in campo professionale. Tutti i prodotti Allied Vision sono venduti in uno scenario B2B.

Telecamere senza custodia chiusa

Le telecamere senza custodia o con una custodia incompleta devono essere protette dalle emissioni elettromagnetiche in ambienti professionali in conformità con le norme CEM nazionali.

JA – 日本語

安全性

本カメラを使用する前に、この安全の手引きをお読みください。常に、警告事項を守ってください。必ず、[Intended use](#) 35 ページの通りに、本カメラを使用してください。



注意

やけどの危険性

作動中のカメラは、やけどを引き起こす温度まで熱くなる恐れがあります。



注意

カメラまたはレンズの落下によるけが

カメラまたはレンズが落下すると、けがをする恐れがあります。



注意

レンズマウントの鋭利な端部で切り傷の危険性

レンズマウントのギザギザの部分が鋭利である可能性があります。

用途

Allied Vision製品は、専門家が視覚装置に統合することを意図したものです。すべてのAllied Vision製品は、企業間取り引き用に販売されています。

ハウジングで閉じられていないカメラ

ハウジングのないカメラまたはハウジングが不完全なカメラは、現地の電磁両立性（EMC）規定に従い、専門家によって、EMCエミッションから保護される必要があります。

NL - Nederlands

Veiligheid

Lees deze veiligheidsinstructies voordat u de camera gaat gebruiken. Neem deze waarschuwingen altijd in acht. Gebruik de camera uitsluitend, zoals aangegeven in het [Intended use](#) op pagina 35.



VOORZICHTIG

Risico van verbranding

Een camera die gebruikt wordt, kan temperatuurwaarden bereiken die brandwonden kunnen veroorzaken.



VOORZICHTIG

Letsel door vallende camera's of lenzen

Een vallende camera of lens kan letsel veroorzaken.



VOORZICHTIG

Risico van snijwonden door scherpe randen van lensbevestigingen

Het schroefdraad van de lensbevestiging kan scherpe randen hebben.

Beoogd gebruik

Het beoogde gebruik van het Allied Vision-product is de integratie in optische systemen door professionals. Alle Allied Vision-producten worden verkocht in de B2B-markt.

Camera's zonder gesloten behuizing

Camera's zonder behuizing of met een onvolledige behuizing moeten door professionals worden beschermd tegen EMC-straling door EMC-beschermingen ter plaatse.

NO - Norsk

Sikkerhet

Les disse sikkerhetsinstruksene før du bruker kameraet. Følg advarslene til en hver tid. Bruk kun kameraet i samsvar med [Intended use](#) på side 35.



FORSIKTIG

Risiko for brannskader

Et kamera i bruk kan nå temperaturnivåer som kan forårsake brannskader.



FORSIKTIG

Skade ved fallende kameraer eller linser

Et fallende kamera eller en fallende linse kan forårsake skade.



FORSIKTIG

Risiko for kutt fra skarpe kanter på linsefester

Sporene på linsefestet kan ha skarpe kanter.

Tiltenkt bruk

Den tiltenkte bruken av Allied Vision-produktet er integrering i visjonssystemer av profesjonelle. Alle Allied Vision-produkter selges i en forretning til forretning-situasjon.

Kameraer uten lukkede kamerahus

Kameraer uten kamerahus eller med ufullstendige kamerahus må beskyttes mot EMC-utslipp av fagfolk i henhold til lokale EMC-bestemmelser.

SV - Svenska

Säkerhet

Läs igenom säkerhetsinstruktionerna innan du använder kameran. Var hela tiden särskilt uppmärksam på varningarna. Använd enbart kameran på det sätt som anges i [Intended use](#) på sida 35.



VARNING

Risk för brännskada

En kamera i drift kan komma upp i temperaturer som kan orsaka brännskador.



VARNING

Risk för skador från fallande kameror eller objektiv

Fallande kameror eller objektiv kan förorsaka skador.



VARNING

Risk för skärsår från vassa kanter på objektivfattningar

Objektivets gängor kan ha vassa kanter.

Avsedd användning

Den avsedda användningen av Allied Vision-produkter är integrering i visionssystem av fackmän. Samtliga Allied Vision-produkter säljs i en B2B-miljö.

Kameror utan slutna kamerahus

Kameror utan eller med ofullständiga kamerahus måste skyddas mot elektromagnetiska emissioner av fackmän enligt lokala bestämmelser för elektromagnetiska emissioner.

ZH - 英文简体中文版

安全需知

使用本相机前，请阅读本安全说明书。请务必遵守相关警告 和 [Intended use](#) 于第 35 页。



注意事项

烫伤风险

相机操作过程中温度可能上升并导致烫伤风险。



注意事项

相机或者镜头跌落造成伤害

相机或者镜头可能会跌落并造成伤害。



注意事项

镜头接口的锐利边缘划伤风险

镜头接口螺纹边缘可能较为锐利。

预期用途

Allied Vision 产品的预期用途是由专业人士整合到视觉系统中。所有 Allied Vision 的产品均通过 B2B 渠道销售。

无封闭式外壳相机

使用不带外壳或外壳不完整的相机时，必须由专业人员根据当地的 EMC 规定，对其进行 EMC 屏蔽。

Alvium USB cameras at a glance



Get an overview of Alvium USB camera documentation.

**Read this document carefully**

Learn to avoid damage to your Alvium USB camera and use it in the most safe and efficient way.

**Bandwidth, exposure time values, delays, and ROI frame rates**

- The **default bandwidth** for Alvium USB cameras is 200 MBps. For some models, you can achieve higher frame rates by increasing values for **MaxTransferSize** and **DeviceLinkThroughputLimit**. See [Operating systems and bandwidth](#) on page 179.
- Available values and increments for **exposure time** depend on other controls, such as **DeviceLinkThroughputLimit**. See [Value changes by feature interdependencies](#) on page 174.
- For **delays**, see [Triggering with rolling shutter cameras](#) on page 165.
- Calculation of maximum **frame rates for different ROIs** for Alvium USB cameras does not allow to give a formula. [Typical operation](#) on page 50 defines the conditions for measuring ROI frame rates.

**Default user set**

If you want to use the **UserSetDefault** feature to reset to default values, be aware that some features may not be reset.

For trigger features, see [Trigger features and UserSetDefault](#) on page 165

**Individual properties of Alvium USB cameras**

Please consider individual properties of Alvium USB cameras to design applications successfully. See [Performance and troubleshooting](#) on page 171 for details.

**Bare board cameras**

If you intend to design an application using bare board cameras, please consider:

- Aligning the sensor to the lens is extremely difficult and expensive. Therefore, we recommend you to do evaluation with housed cameras first.
- Bare board cameras are specialized components. We cannot give all data needed for any application in advance.
- Please let us partner with you for bare board camera applications to ensure a successful design.
- For reference, keep the **sandwich label including the serial numbers** of the Alvium chip and the camera itself with the camera. See [Serial numbers of Alvium® chips and bare board cameras](#) on page 143.

Shipping contents

- Alvium USB camera
- Download Instructions for First Camera Operation document

What else do you need?

This is a selection of helpful downloads:

Document	Link
Alvium Cameras Features Reference	www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation
Alvium Cameras Hardware Options	www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents
Alvium Cameras Accessory Guide	
Optimum Heat Dissipation for Housed Alvium Cameras application note	
Electromagnetic Compatibility for Open Housing Alvium Cameras application note	
Defect Pixel Correction on Alvium Cameras application note	
Avoiding Ground Loops in Vision Systems application note	
Sensor Alignment for Alvium Cameras white paper	

Table 1: Document downloads for Alvium USB cameras

Software	Link
Vimba Suite for Windows, Linux, and Linux/ARM, including Vimba SDK , Vimba Viewer , and Vimba Driver Installer for Windows	www.alliedvision.com/software

Table 2: Software downloads for Alvium USB cameras

Contact us

Website

General

www.alliedvision.com/en/contact

Distribution partners

www.alliedvision.com/en/about-us/where-we-are

Email

General

info@alliedvision.com

Support

support@alliedvision.com

Offices

Europe, Middle East, and Africa (Headquarters)

Allied Vision Technologies GmbH
Taschenweg 2a
07646 Stadtroda, Germany
T// +49 36428 677-0 (Reception)
T// +49 36428 677-230 (Sales)
F// +49 36428 677-28

Asia-Pacific

China

Allied Vision Technologies
(Shanghai) Co., Ltd.
2-2109 Hongwell Int. Plaza
1602# ZhongShanXi Road
Shanghai 200235, China
T// +86 21 64861133

Singapore

Allied Vision Technologies Asia Pte. Ltd
82 Playfair Rd, #07-02 D'Lithium
Singapore 369001
T// +65 6634 9027

North, Central, and South America

Canada

Allied Vision Technologies Canada Inc.
300 – 4621 Canada Way
Burnaby, BC V5G 4X8, Canada
T// +1 604 875 8855

Exton, USA

Allied Vision Technologies, Inc.
102 Pickering Way- Suite 502
Exton, PA 19341, USA
Toll-free// +1-877-USA-1394
T// +1 978 225 2030

Contents

Read before use	2
EN - English	2
DA - Dansk	3
DE - Deutsch	4
ES - Español	5
FI - Suomi	6
FR - Français	7
IT - Italiano	8
JA - 日本語	9
NL - Nederlands	10
NO - Norsk	11
SV - Svenska	12
ZH - 英文简体中文版	13
Alvium USB cameras at a glance	14
Shipping contents	16
What else do you need?	16
Contact us	17
Document history and conventions	24
Document history	25
Conventions used in this user guide	27
Typographic styles	27
Symbols and notes	27
Naming and terms	28
Camera model naming	28
Terms and acronyms	29
Compliance, safety, and intended use	31
Compliance notifications	32
For customers in the USA	32
United States of America: Supplier Declaration of Conformity	33
Party issuing Supplier's Declaration of Conformity	33
Responsible Party - U.S. Contact Information	33
For customers in Canada	33
Pour utilisateurs au Canada	34
Bare board and open housing cameras	34
Avoid electromagnetic interferences	34
Intended use	35
Copyright and trademarks	35
Your safety	36
Handling lens mounts	36
Housed cameras: handling hot cameras	36
Providing optimum heat dissipation	36

Camera mounting	37
Heavy lenses	37
Product safety	38
Electrical connections	38
ESD	38
Cable connections	38
PCBAs	38
Camera power	38
GPIOs	39
Ground loops	39
USB connections	40
Handling bare board cameras	40
Optical components	41
Sensor	41
Lenses	42
Heat sinks and conductive media	42
Heat sinks	42
Conductive media for heat sinks	42
BIOS drivers	43
Specifications	44
Applied standards	45
GenICam	45
USB3 Vision 1.0.1	45
IP class	45
Shock and vibration	45
IEC 60068-2-6: Sinusoidal vibration	46
IEC 60068-2-27: Shock	47
IEC 60068-2-64: Random vibration	47
Notes on specifications	48
Sensor	48
Absolute QE plots	48
Spectral response plots	48
Exposure time and frame rate	49
Exposure time behavior regarding ExposureMode	49
Typical operation	50
Triggering	51
Sensor shutter types and triggering	51
Power consumption	52
Dimensions	52
Alvium 1800 U model specifications	53
Alvium 1800 U-040m/c	53
Absolute QE	55
Spectral response	55
ROI frame rates	56
Alvium 1800 U-050m/c	57
Absolute QE	59
Spectral response	59
ROI frame rates	60

Alvium 1800 U-120m/c	61
Absolute QE	63
Spectral response.....	63
ROI frame rates	64
Alvium 1800 U-158m/c	65
Absolute QE	67
Spectral response.....	67
ROI frame rates	68
Alvium 1800 U-240m/c	69
Absolute QE	71
Spectral response.....	71
ROI frame rates	72
Alvium 1800 U-319m/c	74
Absolute QE	76
Spectral response.....	76
ROI frame rates	77
Alvium 1800 U-500m/c	78
Absolute QE	80
Spectral response.....	80
ROI frame rates	81
Alvium 1800 U-501m NIR.....	83
Absolute QE	85
Spectral response.....	85
ROI frame rates	86
Alvium 1800 U-507m/c	88
Absolute QE	90
Spectral response.....	90
ROI frame rates	91
Alvium 1800 U-508m/c	92
Absolute QE	94
Spectral response.....	94
ROI frame rates	95
Alvium 1800 U-1236m/c	97
Absolute QE	99
Spectral response.....	99
ROI frame rates	100
Alvium 1800 U-1240m/c	101
Absolute QE	103
Spectral response.....	103
ROI frame rates	104
Alvium 1800 U-2050m/c	106
Absolute QE	108
Spectral response.....	108
ROI frame rates	109
White balance default.....	111
Dimensions and mass	112
Bare board	112
Open housing	112

Open housing 90°	112
Closed housing	113
Closed housing 90°	113
Technical drawings	114
Bare Board	115
Bare Board 90°	117
Open Housing S-Mount	118
Open Housing CS-Mount	119
Open Housing C-Mount	120
Open Housing S-Mount 90°	121
Open Housing CS-Mount 90°	122
Open Housing C-Mount 90°	123
Closed Housing S-Mount	124
Closed Housing CS-Mount	125
Closed Housing C-Mount	126
Closed Housing S-Mount 90°	127
Closed Housing CS-Mount 90°	128
Closed Housing C-Mount 90°	129
Lens mounts and maximum protrusion	130
IR cut filter	131
Sensor position accuracy	132
Sensor shift and rotation	132
Sensor tilt	133
Lenses: Focal length vs. field of view	134
About this chapter	135
Parameters in tables	135
Optical vignetting with certain lenses	135
About S-Mount lenses	136
Focal length vs. field of view	136
Model overview	136
Type 1/3.6 (4.9 mm diagonal) sensors	137
Type 1/3 (6 mm diagonal) sensors	137
Type 1/2.9 (6.3 mm diagonal) sensors	138
Type 1/2.5 (7.1 mm diagonal) sensors	138
Type 1/2.3 (7.9 mm diagonal) sensors	139
Type 1/1.8 (8.9 mm diagonal) sensors	139
Type 1/1.7 (9.33 mm diagonal) sensors	140
Type 2/3 (11.1 mm diagonal) sensors	140
Type 1 (15.86 mm diagonal) sensors	141
Type 1.1 (17.6 mm diagonal) sensors	141
Installing the camera	142
Touching hot cameras	143
Bare board cameras	143
Serial numbers of Alvium® chips and bare board cameras	143
Mounting the heat sink	145
Mounting the camera	146
Mounting bare board cameras	146

Mounting housed cameras	147
Bottom or top mounting	147
Front mounting	147
Mounting the lens	148
Mounting and focusing S-Mount lenses	149
Software and driver installation on the host	152
Required components	152
Installing the camera driver using Vimba on a Windows system	152
Using the camera with third-party drivers	153
Installing drivers for camera and host adapter	153
Installing the host adapter and Vimba	153
Installing the camera driver	153
Installing the camera driver with Windows tools	155
Camera interfaces	157
Recommended accessories	158
Back panel	158
I/O connector pin assignment	158
Non-isolated, programmable GPIOs	160
GPIOs description	160
Input levels	161
Output levels	161
Status LED	162
Normal operation	162
Error conditions	162
Triggering	163
Trigger signal flow	164
Trigger latency	165
Trigger features and UserSetDefault	165
Triggering with rolling shutter cameras	165
Image data flow	167
Firmware update	169
Please note	170
Firmware update with Vimba	170
Performance and troubleshooting	171
Optimizing performance	172
Image transfer with rolling shutter cameras	172
Frame rate jitter	172
Changing feature values while the camera is streaming	173
Value changes by feature interdependencies	174
Effects for the interdependent features	175
Impact by other features	175
Dark current compensation	175
Additional compensation	176
Black level compensation for 1800 U-050m/c	177

Shutter types affecting image readout	178
Operating systems and bandwidth	179
Sensor data output and camera data output	179
Hardware and bandwidth	180
Vimba settings	180
Performance on reference systems	180
Dividing bandwidth between devices on a common USB 3.0 or 3.1 Gen 1 bus	182
Ideal setup for two cameras	182
Best practice for bandwidth management	182
Cascading hubs divide bandwidth	183
Troubleshooting common issues	183
Camera recognition	184
Unexpected events	185
Performance	186
Radio signal interference	187
Index	188

Document history and conventions



This chapter includes:

Document history	25
Conventions used in this user guide.....	27
Naming and terms	28

Document history

Version	Date	Remarks
V3.2.2	2021-Jan-22	<ul style="list-style-type: none"> Updated pixel formats in Alvium 1800 U model specifications on page 53. Applied editorial changes.
V3.2.1	2020-Dec-15	<ul style="list-style-type: none"> Added information on the exposure time offset in Exposure time behavior regarding ExposureMode on page 49. Updated values for ROI frame rates and for minimum and maximum exposure time in Alvium 1800 U model specifications on page 53. Added values for White balance default on page 111. Updated drawings and dimension values for bare board cameras in Technical drawings on page 114. Added information about Serial numbers of Alvium® chips and bare board cameras on page 143. Added description for push-pull in GPIOs description on page 160. Added Trigger features and UserSetDefault on page 165. In Image data flow on page 167, added FPNC support for all models, except for Alvium 1800 U-2050. Added notes about frame rates for rolling shutter cameras run in triggered mode. Applied editorial changes.
V3.2.0	2020-Jul-22	<ul style="list-style-type: none"> Added Alvium 1800 U-240m/c, 1800 U-508m/c, and 1800 U-1240m/c models. Updated ROI frame rates and pixel formats in Alvium 1800 U model specifications on page 53. Added QE and spectral response to Alvium 1800 U-2050m/c on page 106. Extended information in Shock and vibration on page 45. Updated spectral response graphic in IR cut filter on page 131. Added Sensor position accuracy on page 132. Added Read before use on page 2. Corrected minor errors.

Table 3: Document history (sheet 1 of 2)

Version	Date	Remarks
V3.1.3	2020-Mar-12	<ul style="list-style-type: none"> Corrected maximum exposure times. Added <i>ExposureActive</i> signal to the description of sensor shutter modes. DPC: Removed specifications into an application note. FPNC: Updated note in Image data flow on page 167.
V3.1.2	2020-Mar-04	Applied minor changes.
V3.1.1	2020-Feb-28	<ul style="list-style-type: none"> Updated frame rates and exposure time values. Added information about frame rates with different triggering modes.
V3.1.0	2020-Feb-20	<ul style="list-style-type: none"> Added Alvium 1800 U-319m/c, 1800 U-507m/c, 1800 U-1236m/c, and 1800 U-2050m/c models. Added specifications for DPC. Updated description for sensor shutter modes.
V3.0.0	2020-Jan-06	<ul style="list-style-type: none"> Added Alvium 1800 U-040m/c, 1800 U-158m/c, and 1800 U-501m NIR models.
V2.0.0	2019-Oct-18	<ul style="list-style-type: none"> Added Alvium 1800 U-050m/c and 1800 U-120m/c models. Updated contents about bandwidth. Updated screenshots for camera driver installation. Added Dark current compensation on page 175. Updated technical drawings and dimensions for bare board in Technical drawings on page 114. Restructured contents in Performance and troubleshooting on page 171. Applied editorial changes.
V1.1.0	2019-Jul-01	<ul style="list-style-type: none"> Added missing color pixel formats and removed separate bit depth in Specifications on page 44. Corrected ADC bit depth in specifications for Alvium 1800 U-500m/c on page 78 and in Image data flow on page 167.
V1.0.0	2019-Jun-13	Release version

Table 3: Document history (sheet 2 of 2)

Conventions used in this user guide

To give this document an easily understood layout and to emphasize important information, the following typographical styles and symbols are used:

Typographic styles

Style	Function
Emphasis	Programs, or highlighting important things
Feature names	Names for GenICam features
<i>Feature options</i>	Options for GenICam features
<i>Input commands</i>	Text or command to type in by the user, selected menu options, or other selectable options
UIElements	Text that is displayed or output by the system, like parts of the GUI, dialog boxes, buttons, menus, important information, or windows titles
Web addresses and references	Links to webpages and internal cross references

Table 4: Typographic styles

Symbols and notes



CAUTION

Risk of burns

Precautions are described



CAUTION

Injury by falling cameras or lenses

Precautions are described



CAUTION

Risk of cuts by sharp edges of lens mounts

Precautions are described



NOTICE

Material damage

Precautions are described.


Practical tip

Additional information helps to understand or ease handling the camera.


Avoiding malfunctions

Precautions are described.


Additional information

Web address or reference to an external source with more information is shown.

Naming and terms

Camera model naming

Alvium cameras are named to identify model properties.
For example, **Alvium 1800 U-500c** is composed of:

	Alvium	1800	U	500	c
Content	Camera series	Camera series details	Interface	Resolution ¹	Color/monochrome
Examples	Alvium	1500: Basic feature set 1800: Advanced feature set or high-performance sensors	C: MIPI CSI-2 U: USB	500: 5.0 MP 050: 0.5 MP	c: color m: monochrome m NIR: monochrome near infrared

¹Model resolutions may slightly deviate from model naming.

Table 5: Camera model naming


Hardware options

Alvium USB cameras are available with various options for housing, lens mount, or USB connector position. For ordering, see hardware options and product codes in the Alvium Cameras Hardware Options document at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Terms and acronyms

Term or acronym	Description	Reference
bare board	Camera consisting of electronics and sensor on a common printed circuit board (PCB), to be designed into a housing with heat sink and lens mount	Bare Board on page 115
CRA	Chief ray angle	Alvium 1800 U-500m/c on page 78
EMVA	European Machine Vision Association	www.emva.org
ERS	Electronic rolling shutter, see RS	Shutter types affecting image readout on page 178
ESD	Electrostatic discharge	ESD on page 38
FCC	Federal Communications Commission	For customers in the USA on page 32
FPNC	Pixed pattern noise correction	Image data flow on page 167
fps	Frames per second	Alvium 1800 U-500m/c on page 78
GenICam	Generic Interface for Cameras, EMVA	www.emva.org
GND	Ground (power)	I/O connector pin assignment on page 158
GPIOs	General purpose inputs and outputs (non-isolated)	GPIOs description on page 160
GRRS	Global reset release shutter, see GRS	Shutter types affecting image readout on page 178
GRS	Global reset shutter, see GRRS	Shutter types affecting image readout on page 178
GS	Global shutter	Shutter types affecting image readout on page 178
H × V	Horizontal × Vertical (sensor resolution)	Alvium 1800 U-500m/c on page 78
KB	Kilobyte	Alvium 1800 U-500m/c on page 78
MBps	Megabytes per second	Alvium 1800 U-500m/c on page 78
open housing	Camera housing that is open at the back side to be designed into an encompassing housing with other components	Open Housing S-Mount on page 118
PCBA	Printed circuit board assembly	PCBAs on page 38
QE	Quantum efficiency	Absolute QE on page 80
ROI	Region of interest	ROI frame rates on page 81
RS	Rolling shutter, see ERS	Shutter types affecting image readout on page 178
SFNC	Standard Features Naming Convention (GenICam)	www.emva.org

Table 6: Terms and acronyms (sheet 1 of 2)

Term or acronym	Description	Reference
shutter mode	Value of the <code>ShutterMode</code> feature to select between rolling shutter (RS) and global release shutter (GRS)	Triggering on page 51
shutter type	Sensor specific readout, such as rolling shutter (RS) or global shutter (GS)	Shutter types affecting image readout on page 178
S-Mount	M12-Mount	Mounting and focusing S-Mount lenses on page 149

Table 6: Terms and acronyms (sheet 2 of 2)


Compliance, safety, and intended use



This chapter includes:

Compliance notifications	32
Intended use	35
Copyright and trademarks	35
Your safety	36
Product safety	38

Compliance notifications



National regulations on disposal must be followed.

For customers in the USA

Closed housing cameras only: FCC Class B digital device

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

United States of America: Supplier Declaration of Conformity

Alvium USB cameras comply with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Party issuing Supplier's Declaration of Conformity

Allied Vision Technologies GmbH
Taschenweg 2a
07646 Stadtroda
Germany
T// +49 (36428) 677-106
quality@alliedvision.com

Responsible Party - U.S. Contact Information

Allied Vision Technologies, Inc.
102 Pickering Way – Suite 502
Exton, PA 19341
USA
T// +1 978 225 2030

Note: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For customers in Canada

Closed housing cameras only

This apparatus complies with the Class B limits for radio noise emissions set out in the Radio Interference Regulations.

CAN ICES-3 (B) / NMB-3 (B)

Pour utilisateurs au Canada

Boîtier de caméra fermé seulement

Cet appareil est conforme aux normes classe B pour bruits radioélectriques, spécifiées dans le Règlement sur le brouillage radioélectrique.

CAN ICES-3 (B) / NMB-3 (B)

Bare board and open housing cameras

Bare board and open housing cameras are designed for integration and are delivered with open camera back or without housing on customer's request. Housing design is critical for electromagnetic compatibility (EMC) of the camera.



Requirements for EMC housings

See the Electromagnetic Compatibility for Open Housing Alvium Cameras application note at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Avoid electromagnetic interferences

Interface cables, power cables, and I/O cables are sensitive to electromagnetic interference.

- Use shielded cables only.
- We recommend using cables offered by Allied Vision.
- Avoid coiling.
- We recommend using GPIOs only in environments with low electromagnetic interference.

Moreover, avoid unnecessary bending to prevent damage to the cables.

Intended use

Allied Vision's objective is the development, design, production, maintenance, servicing and distribution of digital cameras and components for image processing. We are offering standard products as well as customized solutions.

Intended use of Allied Vision product is the integration into Vision systems by professionals. All Allied Vision product is sold in a B2B setting.

Allied Vision isn't a legal manufacturer of medical product. Instead, Allied Vision cameras and accessories may be used as components for medical product after design-in by the medical device manufacturer and based on a quality assurance agreement (QAA) between Allied Vision (supplier) and medical device manufacturer (customer). Allied Vision's duties in that respect are defined by ISO 13485, clause 7.2 (customer-related processes, equivalent to ISO 9001, clause 8.2).

Copyright and trademarks

All text, pictures, and graphics are protected by copyright and other laws protecting intellectual property. All content is subject to change without notice.

All trademarks, logos, and brands cited in this document are property and/or copyright material of their respective owners. Use of these trademarks, logos, and brands does not imply endorsement.

Copyright © 2021 Allied Vision Technologies GmbH. All rights reserved.

Your safety

This section informs about issues related to your personal safety. Descriptions explain how to avoid hazards and operate Alvium USB cameras safely.

Handling lens mounts

The lens mount thread has sharp edges. Be careful these edges do not cut your skin when mounting or unmounting lenses.

Housed cameras: handling hot cameras

If the mainboard temperature exceeds the specified maximum for more than two seconds, the camera is powered off automatically. The current value for mainboard temperature is output by `DeviceTemperature`. You can use this value to control cooling by software, for example, to control a fan.

However, if you hold the camera in your hands during operation, your skin may get hurt. If you touch the camera when it is heated up, we recommend wearing protective gloves.

Providing optimum heat dissipation

Design bare board and open housing cameras into a heat dissipative housing with a high thermal conductivity. For more information, see [Mounting bare board cameras](#) on page 146. Keep the operating temperature in the specified range to enable best image quality and to protect the camera from damage. Temperature values apply to a relative humidity of 0 to 80 percent that is non-condensing.

Hardware option	Housing	Components in the cooling areas ¹	Mainboard ²
Bare board ³	Not applicable	+5 °C to +85 °C	See model Specifications on page 44.
Open housing ⁴	+5 °C to +65 °C		
Closed housing		Not applicable	

¹See [Mounting the heat sink](#) on page 145.

²Output by `DeviceTemperature`

³Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com.

⁴Temperature values must be observed for the housing **and** for the cooling areas.

Table 7: Operating temperature ranges for Alvium USB cameras

For your safety and to improve camera performance, operate the camera:

- Mounted to a base with a high thermal conductivity
- With lens or other optical components mounted
- With a heat sink mounted that has large surface areas (closed housing cameras include a heat sink)
- Using conductive media for camera and heat sink mounting
- With active cooling of camera, mounting base, and heat sink, such as by ventilation.

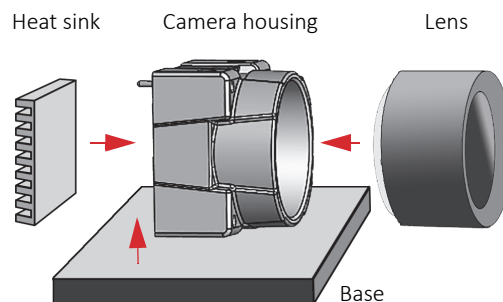


Figure 1: Setup to provide optimum heat dissipation



More information

For more information on heat dissipation, see the Optimum Heat Dissipation for Housed Alvium Cameras application note at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Camera mounting

Housed cameras must be mounted using the mounting threads. If vibration is higher than specified, cameras can disconnect from the mounting. Falling cameras can hurt you. To avoid personal injury:

- Mount the camera according to the instructions in [Mounting housed cameras](#) on page 147.
- Ensure, shock and vibration do not exceed the specified range, see [Shock and vibration](#) on page 45.
- Use a lens support if you want to use [Heavy lenses](#).

Heavy lenses

For non-static applications, use lenses with a mass less than 70 grams and a length less than 38 mm, where the center of gravity is 20 mm, measured from the lens mount front flange. For heavier or longer lenses, use a lens support and apply additional tests. For more information, please contact support@alliedvision.com.

Product safety

To prevent material damage, read the following and understand how to safely handle and operate the camera. Get helpful details about electrical connections and learn how to optimize camera performance.

Electrical connections

ESD

ESD is dangerous for electronic devices, especially when tools or hands get in contact with connectors and electronic components. We recommend measures to avoid damage by ESD:

- Unpacking: Remove the camera from its anti-static packaging only when your body is grounded.
- Workplace: Use a static-safe workplace with static-dissipative mat and air ionization.
- Wrist strap: Wear a static-dissipative wrist strap to ground your body.
- Clothing: Wear ESD clothing. Keep components away from your body and clothing. Even if you are wearing a wrist strap, your body is grounded but your clothes are not.
- Bare board and open housing cameras: use a special ESD housing.

Cable connections

Provide sufficient strain relief for all cable connections to avoid short circuits and malfunctions.

PCBAs

Alvium USB cameras enable access to PCBAs. Keep away from camera electronics to avoid damage.

Camera power

Operating the camera beyond the specified range damages the camera. Cameras are powered over USB. Alternatively, cameras can be powered using the I/O connector at a maximum input of 5.5 VDC, using a limited power source (LPS), according to IEC62368-1: 2014 (Second Edition) with maximum 1.5 A. The camera is not intended to be connected to a DC distribution network.

- Make sure that USB 3.0 or 3.1 Gen 1 host controller cards, on-board host controllers, or hubs provide sufficient current supply for the connected cameras.
- We recommend using powered hubs, especially for multi-camera operation.
- For suitable USB accessories, see the Alvium Cameras Accessory Guide.

GPIOs

To avoid damage to the camera, keep maximum input voltage below 5.5 VDC and maximum current below 12 mA per output. See [Specifications](#) on page 44 for details. The maximum length for I/O cables must not exceed 30 meters.

Reverse polarity

If Alvium USB cameras are externally powered with reverse polarity, the cameras can be damaged. See [I/O connector pin assignment](#) on page 158 for proper external power connections.

JST-cables

JST I/O cables without shielding are designed to be used with bare board or open housing Alvium cameras. The customer is responsible for an EMC compliant design. For applications without an additional EMC housing, please use shielded JST I/O cables with screw lock.

Ground loops

Unsuitable connections can lead to different potentials between the camera system GND and the environmental shield/chassis GND caused by ground loops. This can damage the camera and the connected devices or cause malfunctions.

- Avoid potential differences between the camera housing and GND.
- All wiring must be done by authorized personnel, according to the corresponding technical standards.
- Read the Avoiding Ground Loops in Vision Systems application note.



More information

See the Avoiding Ground Loops in Vision Systems application note at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

USB connections

USB 3.0 and 3.1 Gen 1 host controllers and hubs

To avoid damage to USB 3.0 or 3.1 Gen 1 host controller cards or hubs, make sure these components provide sufficient current supply for the connected cameras. For suitable USB 3.0 accessories, see the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

If suddenly your camera is not recognized anymore, check for a crashed USB hub. Disconnect the USB and power supply cable from the hub. Reconnect both.

USB cables

Proper cable handling enables reliable performance:

- Use only shielded cables to avoid electromagnetic interferences.
- Please use cables recommended by Allied Vision.
- Avoid unnecessary bending to prevent damage to the cables.
- Avoid coiling to prevent electromagnetic interference.

Alvium USB cameras and USB 2.0

If Alvium USB cameras are connected to USB 2.0 ports, they are recognized. They can be operated with reduced performance only if `DeviceLinkThroughputLimit` is set to a value supported by USB 2.0. See [Operating systems and bandwidth](#) on page 179. Some pixel formats may not be supported.



No image transfer at high bandwidths

USB 2.0 supports maximum 50 MBps. If cameras require a higher bandwidth than 50 MBps for streaming, no image is transferred on a USB 2.0 bus. The bandwidth used by a camera results from `DeviceLinkThroughputLimit`, the image resolution, sensor characteristics, and pixel format (Mono8 has 8 bits per pixel, while RGB8 has 3 × 8 bits per pixel).

Handling bare board cameras

Bare board cameras are an electronic assembly without a protective housing. To avoid damage:

- Handle bare board cameras with extreme care.
- Avoid any mechanical stress to the sensor area.
- Avoid short circuits by keeping away from electronics components.

Observe for mounting bare board cameras:

- Allow mechanical contact only at the mounting area. (This does not apply to the cooling areas.)
- Enable proper cooling at the cooling areas, see [Mounting bare board cameras](#) on page 146.

- Give 2 mm minimum clearance above board components.
- Tighten screws at 0.1 Nm maximum torque.
- Follow the instructions in [Mounting bare board cameras](#) on page 146.

Optical components

Provide the following conditions to keep dirt and droplets out of the optical system of camera and lens:

- Dust-free environment
- Low relative humidity
- No condensation.

When camera or lens are stored:

- Cover the lens mount with a protection foil or cap.
- Cover front and back lens with caps.



Damage to optical components by conductive media for heat sinks

See [Conductive media for heat sinks](#) on page 42 for details.

Sensor

Sensors are sensitive to excessive radiation: focused sunlight, lasers, and X-rays can damage the sensor. Dirt and scratches can damage the sensor as well.

Alvium USB cameras do not need additional cleaning. Cameras are cleaned before shipping. Incorrect cleaning can damage the sensor or the filter. Therefore, never clean the sensor or the filter.

Protect the camera filter and the sensor from dirt, because dirt becomes more visible the closer it gets to the sensor. In addition, keep the back lens clean. Hold the camera with the lens mount facing the ground to keep dirt out of the lens mount. When no lens is mounted, protect the sensor and filter by a dust cap.


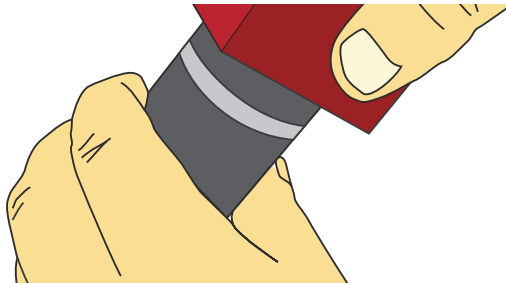


Figure 2: Holding the camera with the lens mount facing the ground

Lenses

Maximum protrusion

The sensor, filter, lens, or camera electronics can be damaged if a lens exceeding maximum protrusion is mounted to the camera. Use lenses with a maximum protrusion within camera specifications. [Figure 3](#) shows maximum protrusion. For details, see [Lens mounts and maximum protrusion](#) on page 130.

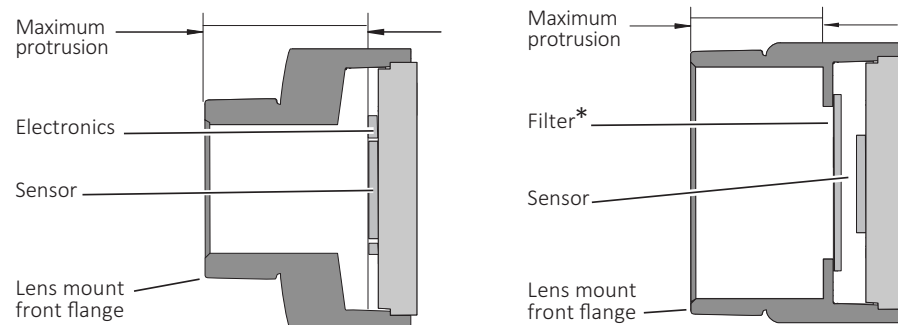

*Only color models are equipped with an IR cut filter

Figure 3: Maximum protrusion S-Mount (left); CS-Mount and C-Mount (right)

For S-Mount lenses, read [Mounting and focusing S-Mount lenses](#) on page 149 to avoid damage to the sensor, the electronics, and lens.

Heat sinks and conductive media

The camera can be damaged by overheating if heat sink or conductive media are not used properly.

Heat sinks

Adhere to the instructions and safety notes provided by the manufacturer of the heat sink.

Conductive media for heat sinks

Some conductive media for heat sinks contain corrosive substances that can damage optical surfaces of the sensor, filter, and lens.

- Cover the optical path of the camera when you apply heat sink compound or adhesive to prevent substances and fumes from damaging optical surfaces.
- Adhere to the instructions and safety notes provided by the manufacturer of the conductive media.
- Ensure that the conductive media is correctly positioned: covering only the components to be cooled.



Cooling areas

See [Mounting the heat sink](#) on page 145 for Alvium cameras **cooling areas**.

BIOS drivers

Sometimes, USB component's firmware must be updated before operation, including devices, such as host adapters cards. To avoid damage and to benefit from possible updates to increase performance: Check for BIOS updates related to USB.

Specifications



This chapter includes:

Applied standards	45
Notes on specifications	48
Alvium 1800 U model specifications	53
White balance default.....	111
Dimensions and mass	112
Technical drawings	114
Lens mounts and maximum protrusion	130
IR cut filter	131
Sensor position accuracy	132

Applied standards

GenICam

GenICam provides a generic access for cameras and devices that is independent of the interface. This enables to operate cameras with USB3 Vision, GigE Vision, or CoaXPress interfaces and Alvium USB cameras with a common software.

GenICam consists of multiple modules for different tasks. Allied Vision cameras and software use these modules, like the SFNC that standardizes feature names and types via an XML file or the transport layer interface (GenTL) used to grab images.

Alvium 1800 U cameras comply to:

- GenICam GenAPI V3.1
- GenICam Standard Features Naming Convention V2.2 (SFNC)
- GenICam Pixel Format Naming Convention V2.0 (PFNC).

USB3 Vision 1.0.1

USB3 Vision standard for cameras and imaging products is based on USB 3.0 standard, using USB 3.0 ports. It provides control over compliant devices by GenICam Applications Programming Interface (API). USB3 Vision standard is administered by the Automated Imaging Association (AIA).

IP class

The following statement applies to closed housing cameras only. Equipped with a lens as intended, the Alvium USB closed housing camera complies with IP30 class according to IEC 60529.

Shock and vibration

Alvium closed and open housing cameras were tested according to the following standards:

- IEC 60068-2-6, sinusoidal vibration testing
- IEC 60068-2-27, shock testing
- IEC 60068-2-64, random vibration testing.

Cameras were inspected before and after the tests. All tests were passed successfully:

Condition	Passed
Image streaming	Images are streamed without errors.
Mechanics	<ul style="list-style-type: none"> The camera housings showed no deformations. The connections between camera components had not come loose. The sensor position was within the specified tolerances of a new camera.
Image quality	Image quality was not affected.
Camera behavior	Camera functionalities were not affected, no deviations occurred.

Table 8: Conditions for passed tests

The conditions for cameras and lenses were the same for all tests. Solid aluminum tubes were used to represent real lenses:

Parameter	Value
Lens dummy length	38 mm
Lens dummy mass	70 g
Center of gravity (CoG) ¹	20 mm
¹ For camera and lens dummy assemblies, measured from the lens mount front flange	

Table 9: Conditions for lenses

IEC 60068-2-6: Sinusoidal vibration

Frequency	Acceleration	Displacement
10 Hz to 58.1 Hz	Not applicable	1.5 mm
58.1 Hz to 500 Hz	20 g	Not applicable

Table 10: Frequency, acceleration, and displacement for IEC 60068-6 tests

Parameter	Value
Axis	x, y, z
Sweep rate	1 oct/min
Duration per axis [hh:mm:ss]	00:11:17
Number of sweeps	20

Table 11: Other parameters for IEC 60068-6 tests

IEC 60068-2-27: Shock

Parameter	Value
Axis	x, y, z
Acceleration	20 g
Number of shocks per axis	10
Duration per axis	11 ms
Waveform	Half sine

Table 12: Parameters for IEC 60068-2-27 tests

IEC 60068-2-64: Random vibration

Frequency	Acceleration
15 Hz to 500 Hz	0.05 g ² /Hz

Table 13: Frequency and acceleration for IEC 60068-2-64 tests

Parameter	Value
Axis	x, y, z
Acceleration RMS (Sigma)	4.9 g
Acceleration peak (Sigma)	14.8 g
Duration per axis [hh:mm:ss]	00:30:00

Table 14: Other parameters for IEC 60068-64 tests

Notes on specifications

This section defines the conditions for specifications stated in this chapter.

Sensor

Absolute QE plots

Measurements for color cameras were done with IR cut filter, measurements for monochrome and S-Mount cameras were done without optical filters. With optical filters, QE decreases by approximately 10 percent. The uncertainty in measurement of the QE values is ± 10 percent. This is mainly due to uncertainties in the measuring apparatus itself (such as Ulbricht sphere and optometer).

Manufacturing tolerance of the sensor increases overall uncertainty.

ON Semiconductor sensors

The curve in the absolute QE plots shown in this chapter is from the sensor manufacturer data sheet. The information was correct at the time of publishing.

Sony sensors

Sony provides relative response curves in their sensor data sheets. To create the absolute QE plots shown in this chapter, the relative response was converted to a normalized QE response and then adjusted as per three measured QE values (at 448 nm, 529 nm, 632 nm) for color sensors and one measured QE value (at 529 nm) for monochrome sensors.

Wavelength

The wavelength range in the absolute QE plots reflects the information available in the sensor manufacturer data sheet at the time of publishing. For additional wavelength information, contact the sensor manufacturer.

Spectral response plots

The curves in the spectral response plots shown in this chapter were calculated from measured quantum efficiencies at 448 nm, 529 nm, and 632 nm. The shape of the curve is taken from the sensor data sheet but the values have been adjusted based on these measured values. The uncertainty in measurement of the spectral response values is ± 10 percent.

Exposure time and frame rate

Stated values were measured for a maximum bandwidth of 375 MBps for Typical operation, using the following test setup:

Component	Property
Desktop workstation	Dell Precision T5500 Precision (EHW400)
Chipset	Intel X5520
CPU	Intel Xeon X5670 (6 cores)
CPU frequency	2.93 GHz
RAM	12 GB
Graphics controller	NVIDIA Quadro FX 580
USB controller	Delock U3 PCIe 1XG205-1S Rev. 1.1 (2-port USB 3.0 to PCI Express x1 Gen 2 with Renesas chipset)
Operating system	Windows 7 Ultimate 64-bit SP1
Measured by	Oscilloscope
Measured signal	<i>ExposureActive</i>

Table 15: Test setup components



Bandwidth, exposure time values, delays, and ROI frame rates

- The **default bandwidth** for Alvium USB cameras is 200 MBps. For some models, you can achieve higher frame rates by increasing values for **MaxTransferSize** and **DeviceLinkThroughputLimit**. See [Operating systems and bandwidth](#) on page 179.
- Available values and increments for **exposure time** depend on other controls, such as **DeviceLinkThroughputLimit**. See [Value changes by feature interdependencies](#) on page 174.
- For **delays**, see [Exposure start delay = exposure area – exposure time](#). on page 166.
- Calculation of maximum **frame rates for different ROIs** for Alvium USB cameras does not allow to give a formula. [Typical operation](#) on page 50 defines the conditions for measuring ROI frame rates.

Exposure time behavior regarding ExposureMode

This section informs about how exposure time behaves in the different exposure modes.

All Alvium cameras have an exposure time offset. The exposure time offset and the exposure time increment depend on sensor and camera characteristics. Both, the exposure time offset and the exposure time increment, can change if **Width**, **PixelFormat**, or **DeviceLinkThroughputLimit** are changed. See [Value changes by feature interdependencies](#) on page 174.

ExposureMode = Timed

For all Alvium cameras, exposure time can be set by `ExposureTime` or `ExposureAuto`. For this, `ExposureMode` is set to *Timed*.

The selected exposure time is extended automatically:

- If the selected exposure time does not match the available increment, the camera automatically extends the exposure time to the next increment.
- The **exposure time offset is included** in the selected exposure time.

ExposureMode = TriggerWidth or TriggerControlled

In addition, most global shutter (GS) cameras can control exposure time by the trigger signal, with the `ExposureMode` set to *TriggerWidth* or *TriggerControlled* (using *ExposureStart* and *ExposureStop*).

The trigger controlled exposure time is extended automatically:

- If the trigger controlled exposure time does not match the available increment, the camera automatically extends the exposure time to the next increment.
- Subsequently, the **exposure time offset is added**.

You can use *ExposureActive* to determine the duration of the exposure time offset.

Typical operation

All timing values are based on following parameters:

- Factory settings (camera after startup)
- Minimum exposure time
- Full resolution
- Mono8 pixel format (also for color models)
- Camera operation in freerun mode
- Sensor readout using ADC bit depth
- Without bandwidth limitations.

Bandwidth: Data is measured for six steps in a range of 200 MBps to 375 MBps. The default value for `DeviceLinkThroughputLimit` is 200 MBps for Alvium 1800 U cameras measured as average sensor readout.

Bit depth: Values are measured for Mono8. If you are using color formats or 10-bit or 12-bit pixel formats, frame rates fall below values for Mono8. Increasing the `DeviceLinkThroughputLimit` value may increase maximum frame rates.

Triggering

The following table shows how the shutter mode impacts available frame rates. Reducing the area for ROI reduces readout time. The relations in [Table 16](#) apply only if exposure time is shorter than readout time.

Sensor type	Shutter mode	Trigger mode	Available frame rates	ROI frame rates
Global shutter (GS)	Global shutter (GS)	Freerun	Maximum values	Increased values
	Global shutter (GS)	External trigger	Maximum values	Increased values
Rolling shutter (RS)	Rolling shutter (RS)	Freerun	Maximum values	Increased values
	Rolling shutter (RS)	External trigger	Halved values	Increased values
	Global reset shutter (GRS)	Freerun	Maximum values	No increase
	Global reset shutter (GRS)	External trigger	Maximum values	No increase

Table 16: Frame rates depending on shutter modes and trigger modes



Achieved frame rates may not match specified values

- Some sensors have an exposure start jitter that may reduce maximum frame rates.
- Your individual setup may cause delays in data transmission.



Bandwidth adjustments

Consider the bandwidth available for camera payload depends on your individual hardware, the operating system, software and drivers, and your application. We recommend you to adjust `DeviceLinkThroughputLimit` and `MaxTransferSize` to your requirements. See [Operating systems and bandwidth](#) on page 179.



Interdependencies between ROI and ExposureTime values

Changing parameters for ROI can affect values for `ExposureTime`, such as minimum, maximum, and increments, but `ExposureTime` itself as well. We recommend you to set:

- ROI values
- `DeviceLinkThroughputLimit`

before you set values for `ExposureTime`.

See [Value changes by feature interdependencies](#) on page 174 for details.

`MaxTransferSize` can have an impact as well.

Sensor shutter types and triggering

Differences between sensors with global shutter (GS), rolling shutter (RS), and global reset shutter (GRS) are explained in [Shutter types affecting image readout](#) on page 178. Triggering behavior differs between cameras with global shutter (GS) and rolling shutter (RS). See [Triggering](#) on page 163 for details.

Power consumption

The power consumption values in this chapter are for **typical operation**:

- Factory settings (camera after startup)
- Minimum exposure time
- Maximum frame rate
- Full resolution
- Mono8 pixel format (also for color models)
- Camera operation in freerun mode
- Sensor readout using ADC bit depth
- Without bandwidth limitations.

Dimensions

For your model's dimensions, see [Dimensions and mass](#) on page 112.

In manufacturing, camera board and sensor are moved against each other to adjust flange focal distance. The value range for camera length with open housing cameras reflects in the technical drawings. See [Technical drawings](#) on page 114.

Alvium 1800 U model specifications

Alvium 1800 U-040m/c

Feature	Specification	
	1800 U-040m (monochrome)	1800 U-040c (color)
Sensor model	Sony IMX287	
Resolution	728 (H) × 544 (V); 0.4 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1/2.9; 5 mm × 3.8 mm; 6.3 mm diagonal	
Pixel size	6.9 μm × 6.9 μm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	289 fps (at ≥200 MBps)	
Exposure time	177 μs to 10 s (at 200 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 1.9 W External power: 2.1 W	

Table 17: Alvium 1800 U-040m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-040m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 17: Alvium 1800 U-040m/c specifications (sheet 2 of 2)

Absolute QE

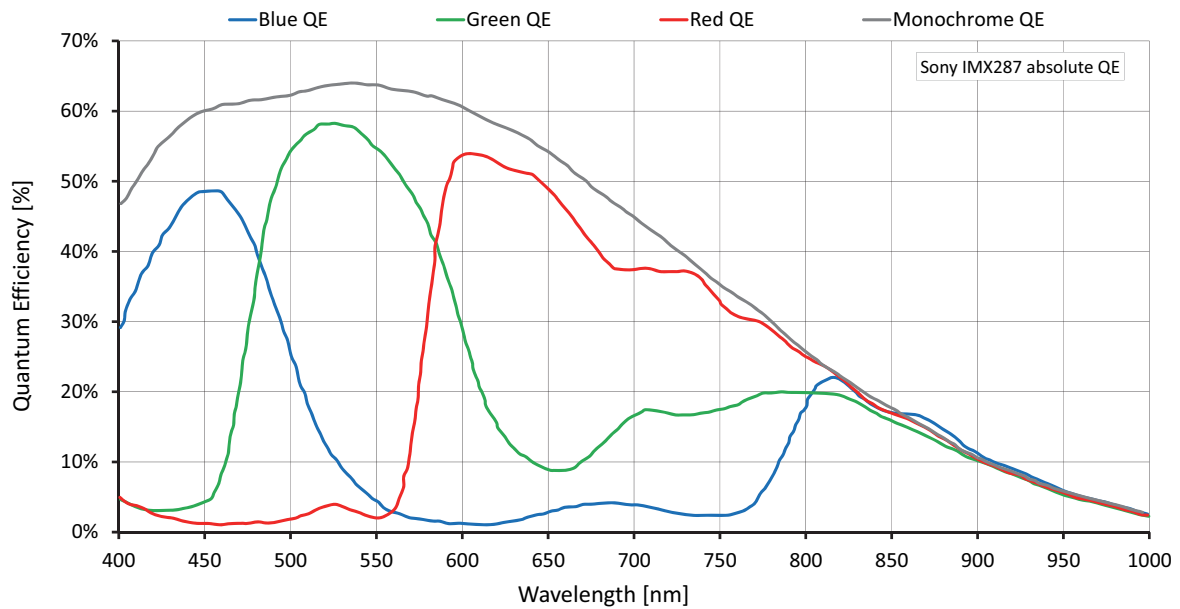


Figure 4: Alvium 1800 U-040m/c (Sony IMX287) absolute QE

Spectral response

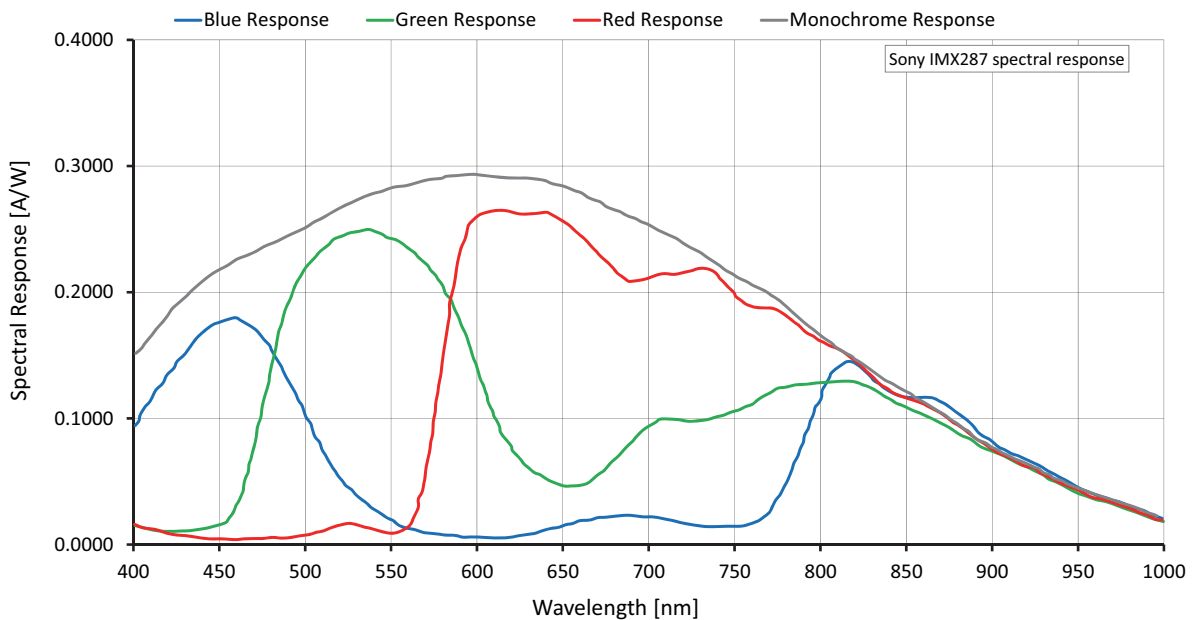


Figure 5: Alvium 1800 U-040m/c (Sony IMX287) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 200 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps] at 200 MBps
Full resolution	728	544	396,032	289
VGA	640	480	307,200	322
HVGA	480	320	153,600	450
QVGA	320	240	76,800	564
HQVGA	240	160	38,400	750
QQVGA	160	120	19,200	896
Maximum × half	728	272	198,016	503
Maximum × minimum	728	8	5,824	1,793
Minimum × maximum	8	544	4,352	293
Minimum × minimum	8	8	64	1,964

Table 18: Alvium 1800 U-040m/c ROI frame rates at 200 MBps

Alvium 1800 U-050m/c

Feature	Specification	
	1800 U-050m (monochrome)	1800 U-050c (color)
Sensor model	ON Semiconductor PYTHON 480	
Resolution	808 (H) × 608 (V); 0.5 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1/3.6; 3.9 mm × 2.9 mm; 4.9 mm diagonal	
Pixel size	4.8 μm × 4.8 μm	
CRA	1.65 deg	
ADC	10-bit	
Monochrome pixel formats	Mono8 (default), Mono10	Mono8, Mono10
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerGR8, BayerGR10, BayerGR10p, BGR8, RGB8 (default)
Maximum image bit depth	10-bit	
Maximum frame rate	117 fps (at ≥200 MBps)	
Exposure time	64 μs to 10 s (at 200 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 11.3 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 1.5 W External power: 1.7 W	

Table 19: Alvium 1800 U-050m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-050m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 19: Alvium 1800 U-050m/c specifications (sheet 2 of 2)

Absolute QE

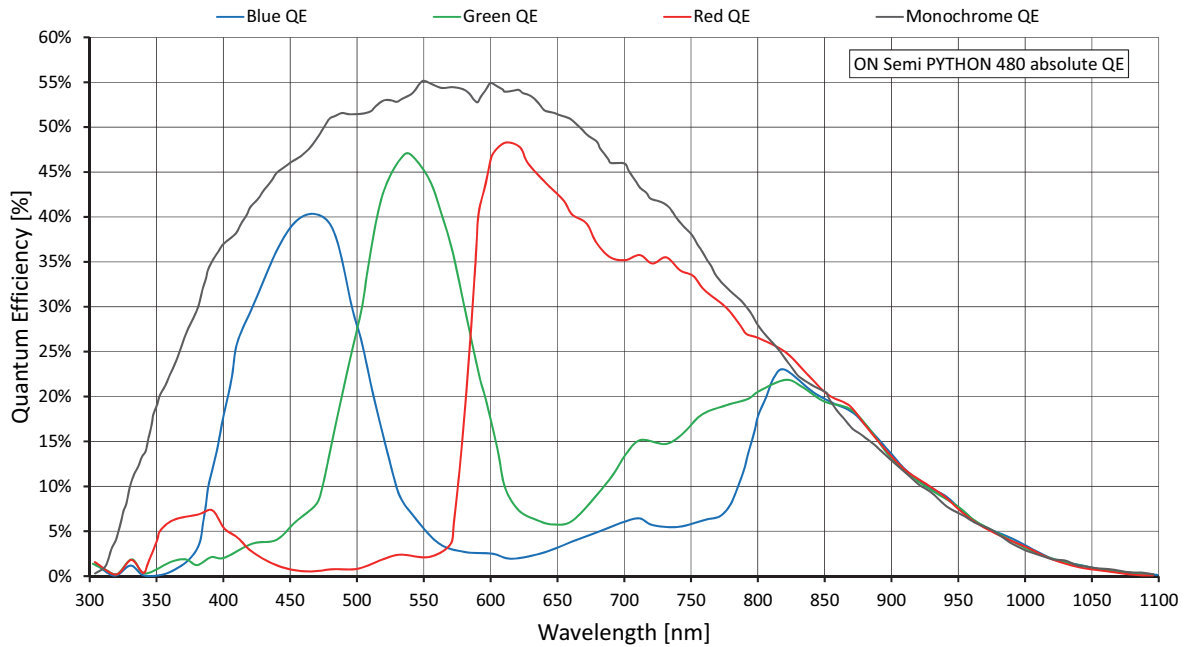


Figure 6: Alvim 1800 U-050m/c (ON Semi PYTHON 480) absolute QE

Spectral response

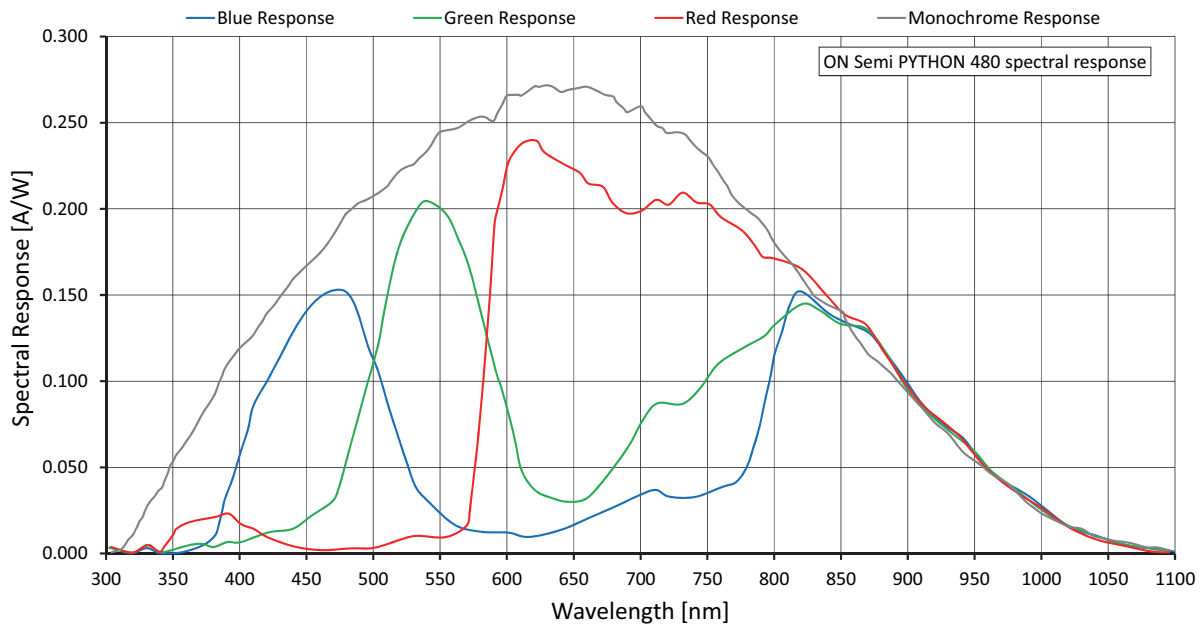


Figure 7: Alvim 1800 U-050m/c (ON Semi PYTHON 480) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 200 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps] at 200 MBps
Full resolution	808	608	491,264	117
VGA	640	480	307,200	176
HVGA	480	320	153,600	313
QVGA	320	240	76,800	514
HQVGA	240	160	38,400	784
QQVGA	160	120	19,200	1,069
Maximum × half	808	304	245,632	219
Maximum × minimum	808	8	6,464	1,476
Minimum × maximum	8	608	4,864	726
Minimum × minimum	8	8	64	1,988

Table 20: Alvium 1800 U-050m/c ROI frame rates at 200 MBps

Alvium 1800 U-120m/c

Feature	Specification	
	1800 U-120m (monochrome)	1800 U-120c (color)
Sensor model	ON Semiconductor AR0135CS	
Resolution	1280 (H) × 960 (V); 1.2 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1/3; 4.8 mm × 3.6 mm; 6.0 mm diagonal	
Pixel size	3.75 μm × 3.75 μm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerGR8, BayerGR10, BayerGR10p, BayerGR12, BayerGR12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	52 fps (at ≥200 MBps)	
Exposure time	57 μs to 1.2 s (at 200 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 17.7 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 1.3 W External power: 1.5 W	

Table 21: Alvium 1800 U-120m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-120m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 21: Alvium 1800 U-120m/c specifications (sheet 2 of 2)

Absolute QE

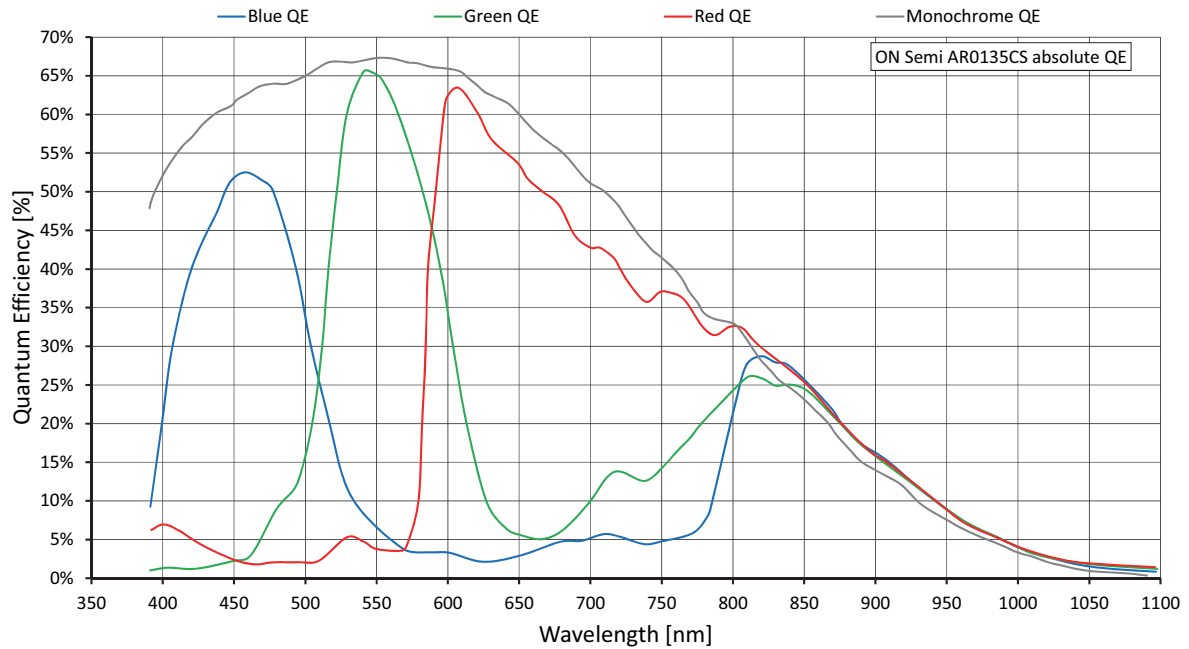


Figure 8: Alvim 1800 U-120m/c (ON Semi AR0135CS) absolute QE

Spectral response

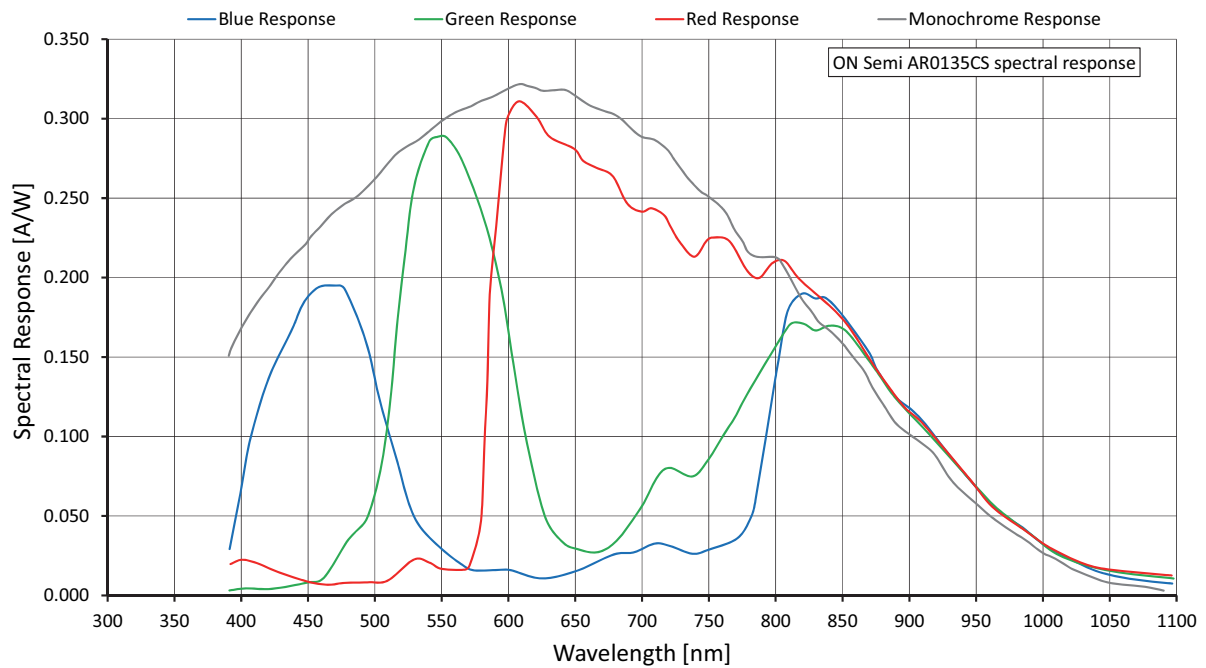


Figure 9: Alvim 1800 U-120m/c (ON Semi AR0135CS) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 200 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps] at 200 MBps
Full resolution	1,280	960	1,228,800	52
HD 720	1,280	720	921,600	69
XGA	1,024	768	786,432	65
SVGA	800	600	480,000	81
VGA	640	480	307,200	100
QVGA	320	240	76,800	160
QQVGA	160	120	19,200	160
Maximum × half	1,280	480	614,400	100
Maximum × minimum	1,280	8	10,240	160
Minimum × maximum	8	960	7,680	52
Minimum × minimum	8	8	64	160

Table 22: Alvium 1800 U-120m/c ROI frame rates at 200 MBps

Alvium 1800 U-158m/c


Feature	Specification	
	1800 U-158m (monochrome)	1800 U-158c (color)
Sensor model	Sony IMX273	
Resolution	1456 (H) × 1088 (V); 1.6 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1/2.9; 5 mm × 3.8 mm; 6.3 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	153 fps (at ≥300 MBps)	
Exposure time	177 μs to 10 s (at 300 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 2.5 W External power: 2.6 W	

Table 23: Alvium 1800 U-158m/c specifications (sheet 1 of 2)


Feature	Specification			
	1800 U-158m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by DeviceTemperature				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 23: Alvium 1800 U-158m/c specifications (sheet 2 of 2)

Absolute QE

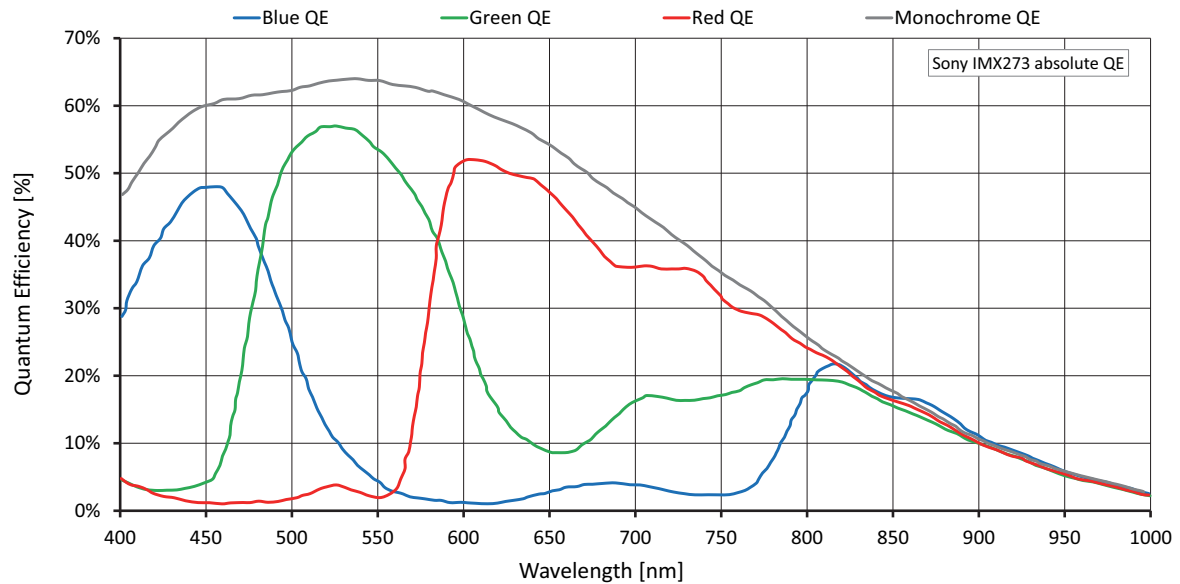

Spectral response

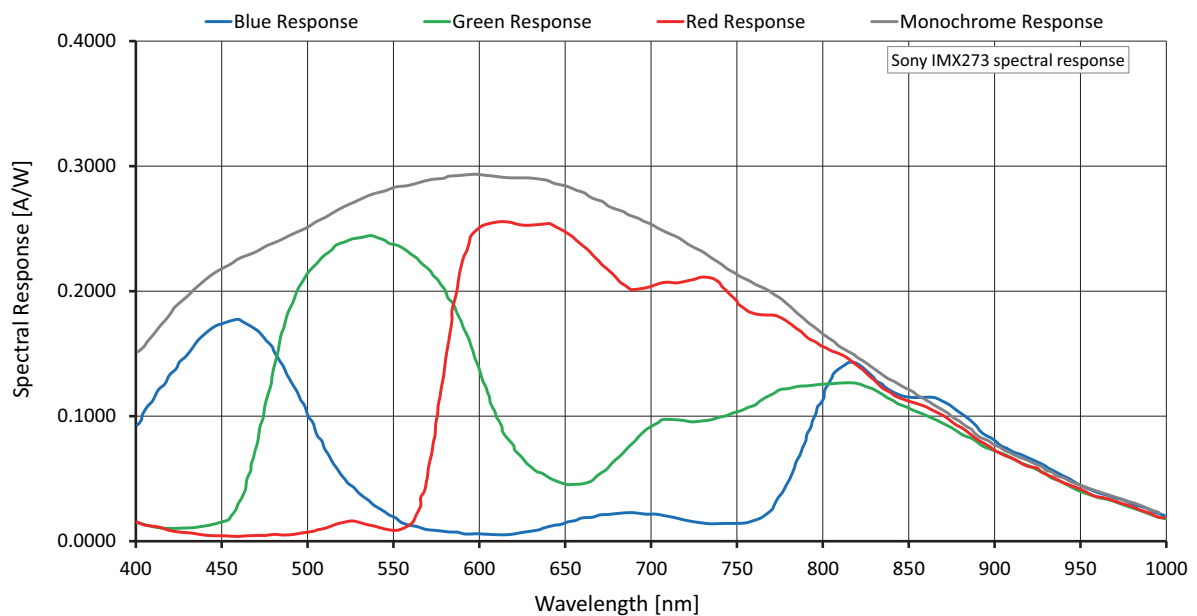

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 300 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				200 MBps	250 MBps	300 MBps
Full resolution	1,456	1,088	1,584,128	114	141	153
WXGA+	1,440	900	1,296,000	138	170	182
SXGA	1,280	1,024	1,310,720	137	163	
HD 720	1,280	720	921.600	188	222	
XGA	1,024	768	786,432	211		
SVGA	800	600	480,000	264		
VGA	640	480	307,200	321		
QVGA	320	240	76,800	564		
QQVGA	160	120	19,200	896		
Maximum × half	1,456	544	792,064	212	259	281
Maximum × minimum	1,456	8	11,648	1,307	1,448	1,526
Minimum × maximum	8	1,088	8,704	157		
Minimum × minimum	8	8	64	1,964		

Table 24: Alvium 1800 U-158m/c ROI frame rates at 200 to 300 MBps

Alvium 1800 U-240m/c

Feature	Specification	
	1800 U-240m (monochrome)	1800 U-240c (color)
Sensor model	Sony IMX392	
Resolution	1936 (H) × 1216 (V); 2.4 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1/2.3; 6.7 mm × 4.2 mm; 7.9 mm diagonal	
Pixel size	3.45 µm × 3.45 µm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	126 fps (at ≥330 MBps)	
Exposure time	176 µs to 10 s (at 330 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 2.8 W External power: 3.0 W	

Table 25: Alvium 1800 U-240m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-240m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 25: Alvium 1800 U-240m/c specifications (sheet 2 of 2)

Absolute QE

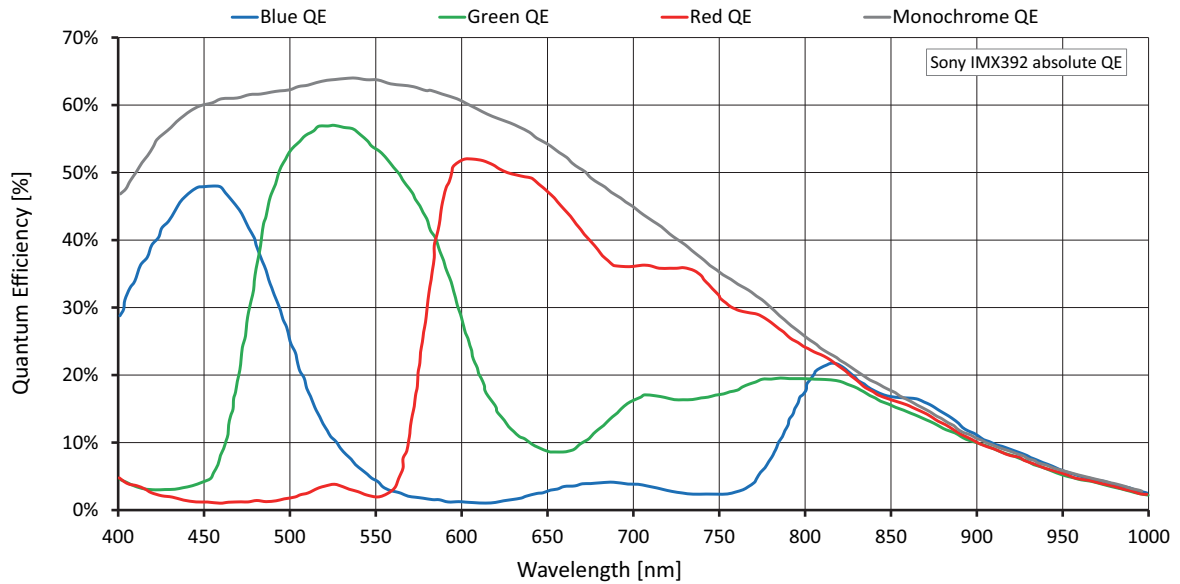


Figure 12: Alvium 1800 U-240m/c (Sony IMX392) absolute QE

Spectral response

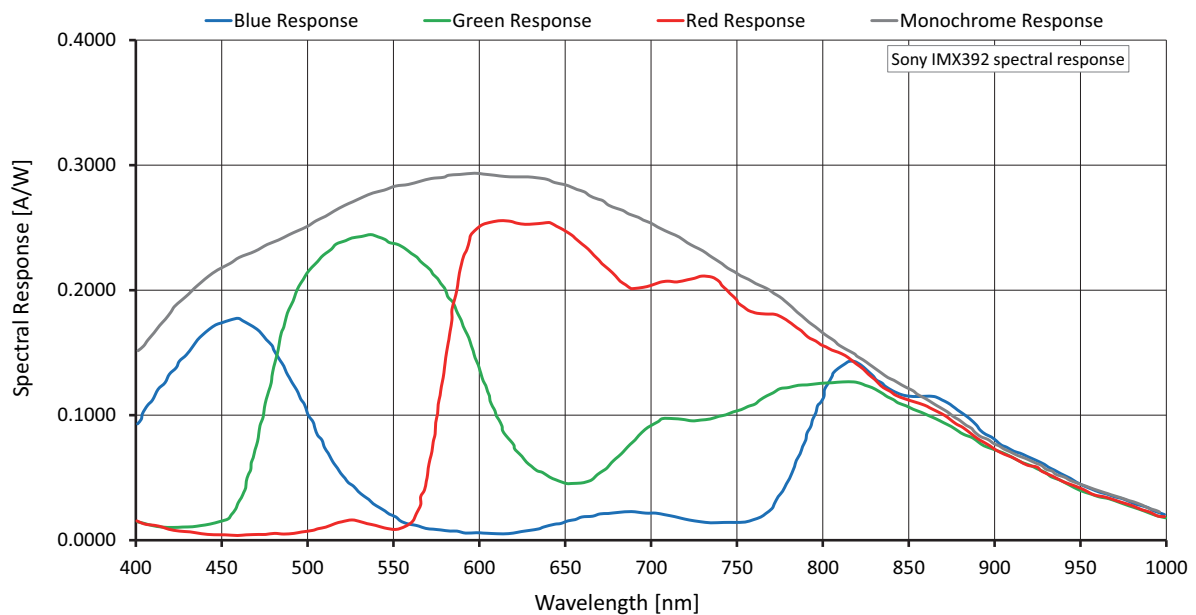


Figure 13: Alvium 1800 U-240m/c (Sony IMX392) spectral response

ROI frame rates

200 to 300 Mbps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 330 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				200 MBps	250 MBps	300 MBps
Full resolution	1,936	1,216	2,354,176	79	98	117
Full HD	1,920	1,080	2,073,600	89	109	130
UXGA	1,600	1,200	1,920,000	97	119	128
WXGA+	1,440	900	1,296,000	139	167	
SXGA	1,280	1,024	1,310,720	138	149	
HD 720	1,280	720	921,600	190	204	
XGA	1,024	768	786,432	194		
SVGA	800	600	480,000	243		
VGA	640	480	307,200	297		
QVGA	320	240	76,800	529		
QQVGA	160	120	19,200	862		
Maximum × half	1,936	608	1,177,088	149	183	217
Maximum × minimum	1,936	8	15,488	1,120	1,263	1,381
Minimum × maximum	8	1,216	9,728	129		
Minimum × minimum	8	8	64	2,039		

Table 26: Alvium 1800 U-240m/c ROI frame rates at 200 to 300 MBps



Frame rate values

Frame rates increase when bandwidth is increased, see [330 to 375 Mbps](#) on page 73.

330 to 375 Mbps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 330 MBps. Increasing the `DeviceLinkThroughputLimit` value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				330 MBps	350 MBps	375 MBps
Full resolution	1,936	1,216	2,354,176		126	
Full HD	1,920	1,080	2,073,600		140	
UXGA	1,600	1,200	1,920,000		128	
WXGA+	1,440	900	1,296,000		167	
SXGA	1,280	1,024	1,310,720		149	
HD 720	1,280	720	921,600		204	
XGA	1,024	768	786,432		194	
SVGA	800	600	480,000		243	
VGA	640	480	307,200		297	
QVGA	320	240	76,800		529	
QQVGA	160	120	19,200		862	
Maximum × half	1,936	608	1,177,088		233	
Maximum × minimum	1,936	8	15,488		1,429	
Minimum × maximum	8	1,216	9,728		129	
Minimum × minimum	8	8	64		2,039	

Table 27: Alvium 1800 U-240m/c ROI frame rates at 330 to 375 MBps

Alvium 1800 U-319m/c

Feature	Specification	
	1800 U-319m (monochrome)	1800 U-319c (color)
Sensor model	Sony IMX265	
Resolution	2064 (H) × 1544 (V); 3.2 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1/1.8; 7.1 mm × 5.3 mm; 8.9 mm diagonal	
Pixel size	3.45 µm × 3.45 µm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	53 fps (at ≥200 MBps)	
Exposure time	175 µs to 10 s (at 200 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 2.2 W External power: 2.4 W	

Table 28: Alvium 1800 U-319m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-319m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by DeviceTemperature				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 28: Alvium 1800 U-319m/c specifications (sheet 2 of 2)

Absolute QE

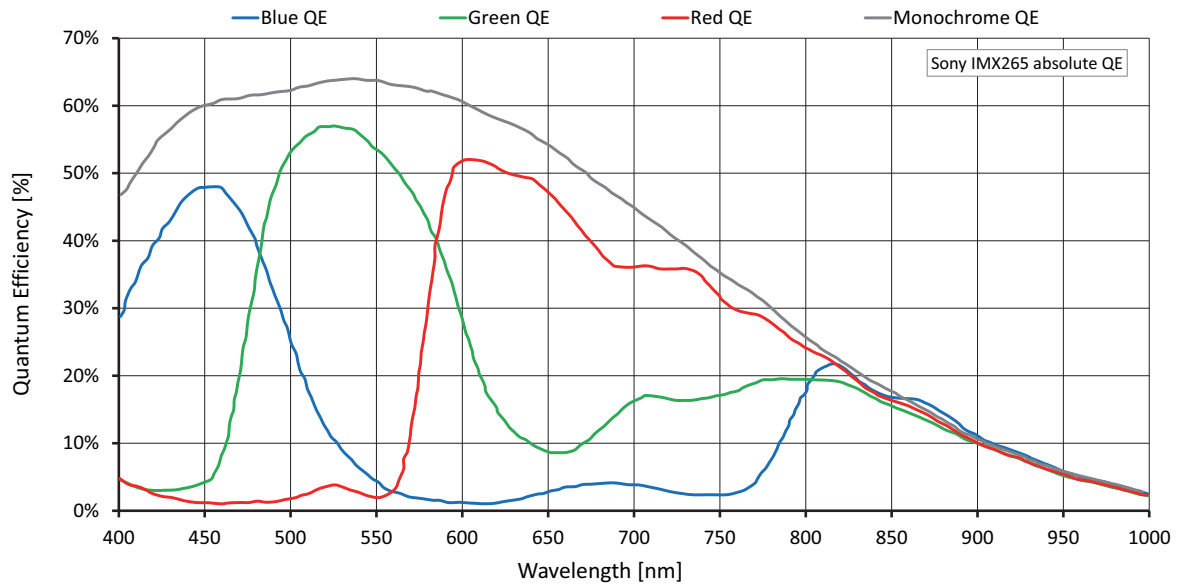


Figure 14: Alvim 1800 U-319m/c (Sony IMX265) absolute QE

Spectral response

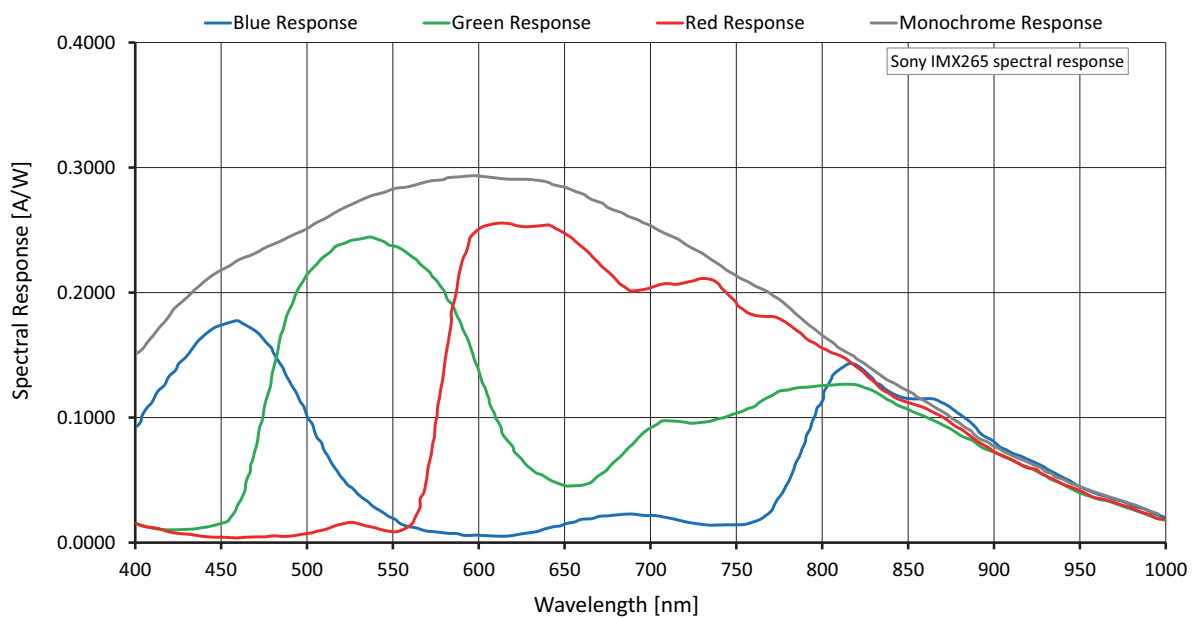


Figure 15: Alvim 1800 U-319m/c (Sony IMX265) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 200 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps] at 200 MBps
Full resolution	2,064	1,544	3,186,816	53
QXGA	2,048	1,536	3,145,728	54
Full HD	1,920	1,080	2,073,600	75
UXGA	1,600	1,200	1,920,000	68
WXGA+	1,440	900	1,296,000	89
SXGA	1,280	1,024	1,310,720	79
HD 720	1,280	720	921,600	110
XGA	1,024	768	786,432	104
SVGA	800	600	480,000	131
VGA	640	480	307,200	160
QVGA	320	240	76,800	289
QQVGA	160	120	19,200	484
Maximum × half	2,064	772	1,593,408	102
Maximum × minimum	2,064	8	16,512	1,025
Minimum × maximum	8	1,544	12,352	54
Minimum × minimum	8	8	64	1,281

Table 29: Alvium 1800 U-319m/c ROI frame rates at 200 MBps

Alvium 1800 U-500m/c

Feature	Specification	
	1800 U-500m (monochrome)	1800 U-500c (color)
Sensor model	ON Semiconductor AR0521SR	
Resolution	2592 (H) × 1944 (V); 5.0 MP	
Sensor type	CMOS	
Shutter type	Rolling shutter (RS)	
Sensor size	Type 1/2.5; 5.7 mm × 4.3 mm; 7.1 mm diagonal	
Pixel size	2.2 μm × 2.2 μm	
CRA	9 deg	
ADC	10-bit	
Monochrome pixel formats	Mono8 (default), Mono10	Mono8, Mono10
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerGR8, BayerGR10, BayerGR10p, BGR8, RGB8 (default)
Maximum image bit depth	10-bit	
Maximum frame rate	68 fps ¹ (at ≥375 MBps)	
Exposure time	8 μs to 0.48 s (at 375 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24.1 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed	
Power requirements	Power over USB; External power	
Power consumption (typical at 5 VDC)	USB power: 2.2 W External power: 2.4 W	
¹ In triggered mode: 34 fps		

Table 30: Alvium 1800 U-500m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-500m/c			
Operating temperature	Hardware option	Housing	Cooling areas ²	Mainboard ³
	Bare board ⁴	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁵	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			

²See [Mounting the heat sink](#) on page 145.

³Output by `DeviceTemperature`

⁴Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com.

⁵Temperature values must be observed for the housing **and** for the cooling areas.

Table 30: Alvium 1800 U-500m/c specifications (sheet 2 of 2)

Absolute QE

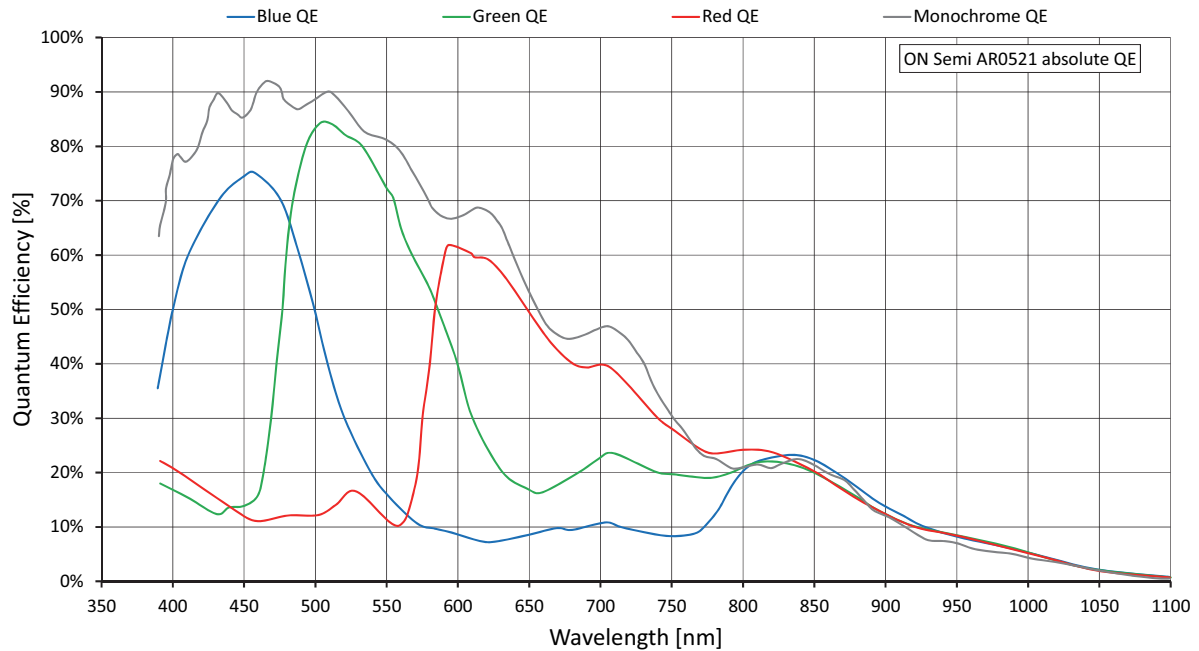


Figure 16: Alvim 1800 U-500m/c (ON Semi AR0521SR) absolute QE

Spectral response

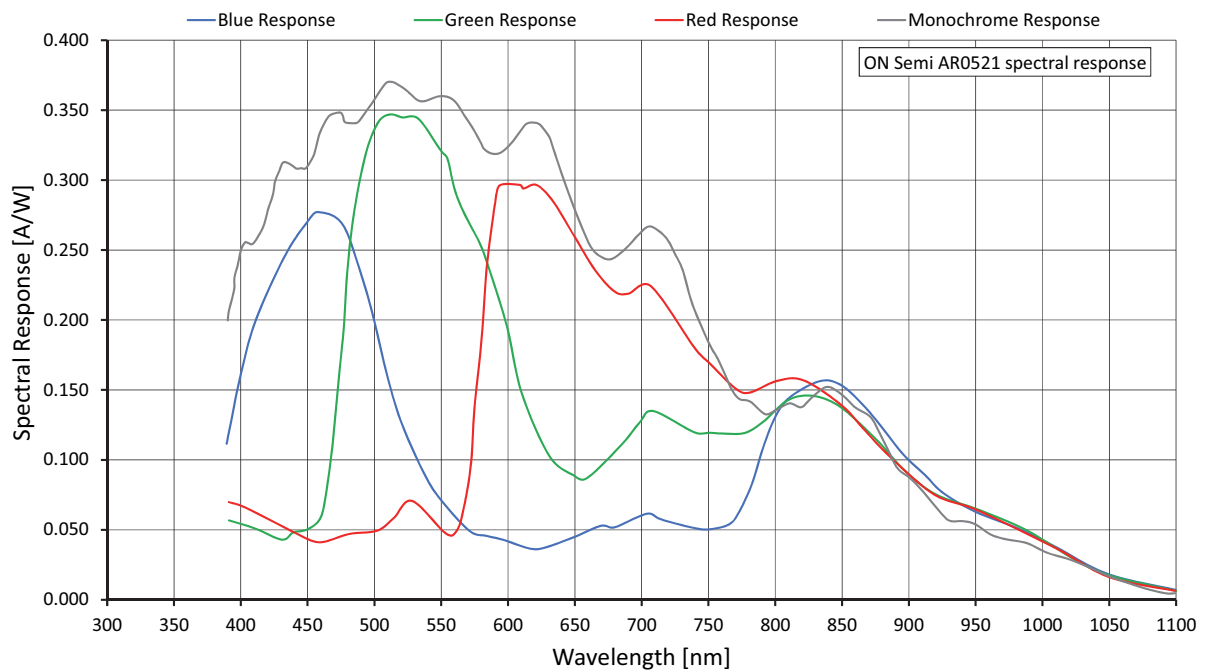


Figure 17: Alvim 1800 U-500m/c (ON Semi AR0521SR) spectral response

ROI frame rates

200 to 300 MBps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 350 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				200 MBps	250 MBps	300 MBps
Full resolution	2,592	1,944	5,038,848	38	48	57
QXGA	2,048	1,536	3,145,728	61	76	85
Full HD	1,920	1,080	2,073,600	92	115	120
UXGA	1,600	1,200	1,920,000	100	109	
WXGA+	1,440	900	1,296,000	143		
SXGA	1,280	1,024	1,310,720	127		
HD 720	1,280	720	921,600	177		
XGA	1,024	768	786,432	167		
SVGA	800	600	480,000	212		
VGA	640	480	307,200	261		
QVGA	320	240	76,800	487		
QQVGA	160	120	19,200	856		
Maximum × half	2,592	972	2,519,424	75	94	113
Maximum × minimum	2,592	8	20,736	1,402	1,690	1,927
Minimum × maximum	8	1,944	15,552	68		
Minimum × minimum	8	8	64	2,892		

Table 31: Alvium 1800 U-500m/c ROI frame rates at 200 to 300 MBps



Frame rate values

- Frame rates increase when bandwidth is increased, see [330 to 375 MBps](#) on page 82.
- When rolling shutter cameras are operated in triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

330 to 375 MBps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 350 MBps. Increasing the `DeviceLinkThroughputLimit` value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				330 MBps	350 MBps	375 MBps
Full resolution	2,592	1,944	5,038,848	63	67	68
QXGA	2,048	1,536	3,145,728	85		
Full HD	1,920	1,080	2,073,600	120		
UXGA	1,600	1,200	1,920,000	109		
WXGA+	1,440	900	1,296,000	143		
SXGA	1,280	1,024	1,310,720	127		
HD 720	1,280	720	921,600	177		
XGA	1,024	768	786,432	167		
SVGA	800	600	480,000	212		
VGA	640	480	307,200	261		
QVGA	320	240	76,800	487		
QQVGA	160	120	19,200	856		
Maximum × half	2,592	972	2,519,424	124	131	132
Maximum × minimum	2,592	8	20,736	2,051	2,142	2,159
Minimum × maximum	8	1,944	15,552	68		
Minimum × minimum	8	8	64	2,892		

Table 32: Alvium 1800 U-500m/c ROI frame rates at 330 to 375 MBps



Frame rate values

When rolling shutter cameras are operated in triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

Alvium 1800 U-501m NIR

Feature	Specification
	1800 U-501m NIR (monochrome)
Sensor model	ON Semiconductor AR0522
Resolution	2592 (H) × 1944 (V); 5.0 MP
Sensor type	CMOS
Shutter type	Rolling shutter (RS)
Sensor size	Type 1/2.5; 5.7 mm × 4.3 mm; 7.1 mm diagonal
Pixel size	2.2 µm × 2.2 µm
CRA	9 deg
ADC	10-bit
Monochrome pixel formats	Mono8 (default), Mono10
YUV color pixel formats	Not applicable
RGB color pixel formats	Not applicable
Maximum image bit depth	10-bit
Maximum frame rate	68 fps ¹ (at ≥375 MBps)
Exposure time	8 µs to 0.48 s (at 375 MBps)
Image buffer (RAM)	256 KB
Non-volatile memory (Flash)	1024 KB
Gain	0 dB to 24.1 dB; 0.1 dB increments
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA
ExposureModes	Timed
Power requirements	Power over USB; External power
Power consumption (typical at 5 VDC)	USB power: 2.2 W External power: 2.4 W
¹ In triggered mode: 34 fps	

Table 33: Alvium 1800 U-501m NIR specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-501m NIR (monochrome)			
Operating temperature	Hardware option	Housing	Cooling areas ²	Mainboard ³
	Bare board ⁴	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁵	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			

²See [Mounting the heat sink](#) on page 145.

³Output by `DeviceTemperature`

⁴Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com.

⁵Temperature values must be observed for the housing **and** for the cooling areas.

Table 33: Alvium 1800 U-501m NIR specifications (sheet 2 of 2)

Absolute QE

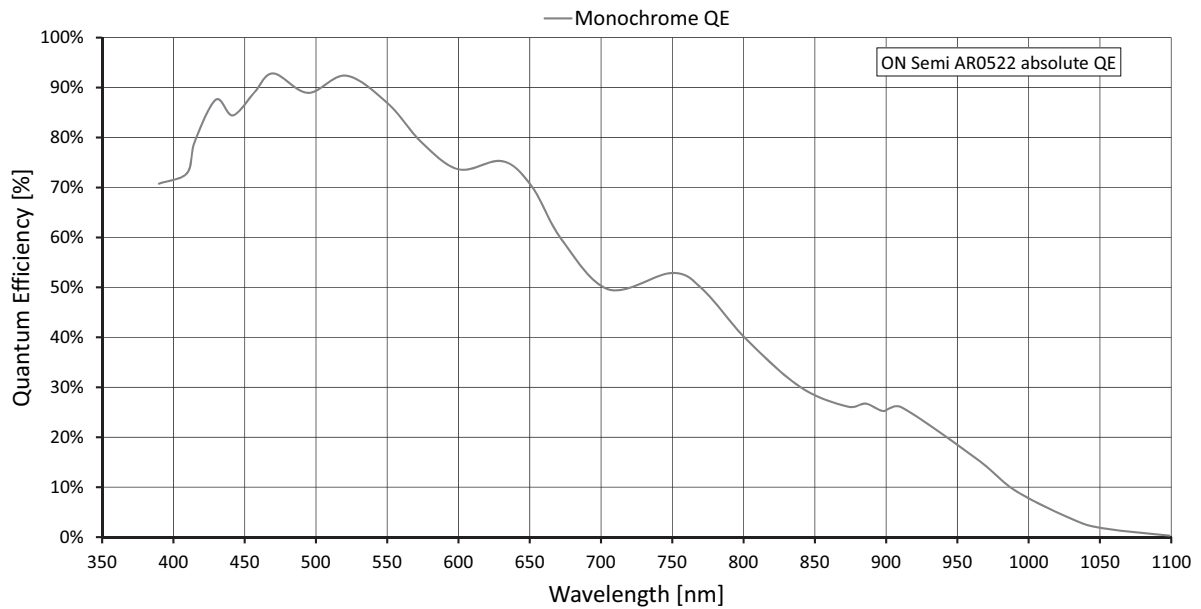


Figure 18: Alvium 1800 U-501m NIR (ON Semi AR0522) absolute QE

Spectral response

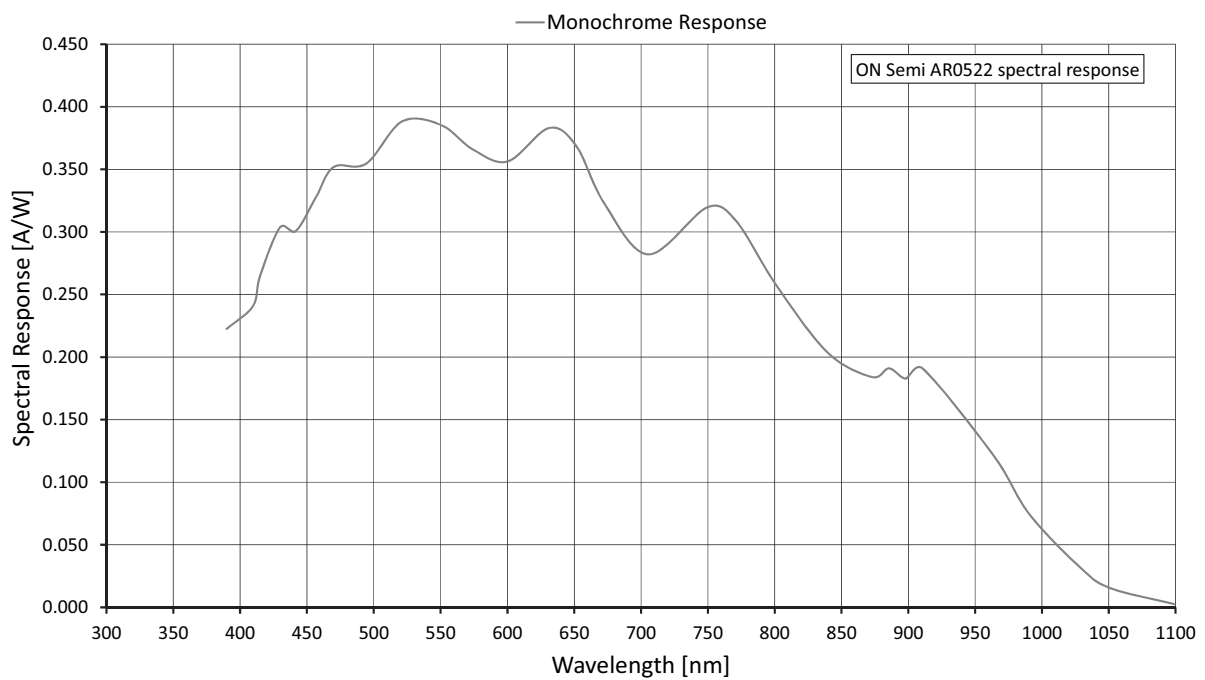


Figure 19: Alvium 1800 U-501m NIR (ON Semi AR0522) spectral response

ROI frame rates

200 to 300 MBps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 350 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				200 MBps	250 MBps	300 MBps
Full resolution	2,592	1,944	5,038,848	38	48	57
QXGA	2,048	1,536	3,145,728	61	76	85
Full HD	1,920	1,080	2,073,600	92	115	120
UXGA	1,600	1,200	1,920,000	100	109	
WXGA+	1,440	900	1,296,000	143		
SXGA	1,280	1,024	1,310,720	127		
HD 720	1,280	720	921,600	177		
XGA	1,024	768	786,432	167		
SVGA	800	600	480,000	212		
VGA	640	480	307,200	261		
QVGA	320	240	76,800	487		
QQVGA	160	120	19,200	856		
Maximum × half	2,592	972	2,519,424	75	94	113
Maximum × minimum	2,592	8	20,736	1,402	1,690	1,927
Minimum × maximum	8	1,944	15,552	68		
Minimum × minimum	8	8	64	2,892		

Table 34: Alvium 1800 U-501m NIR ROI frame rates at 200 to 300 MBps



Frame rate values

- Frame rates increase when bandwidth is increased, see [330 to 375 MBps](#) on page 87.
- When rolling shutter cameras are operated in triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

330 to 375 MBps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 350 MBps. Increasing the `DeviceLinkThroughputLimit` value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				330 MBps	350 MBps	375 MBps
Full resolution	2,592	1,944	5,038,848	63	67	68
QXGA	2,048	1,536	3,145,728	85		
Full HD	1,920	1,080	2,073,600	120		
UXGA	1,600	1,200	1,920,000	109		
WXGA+	1,440	900	1,296,000	143		
SXGA	1,280	1,024	1,310,720	127		
HD 720	1,280	720	921,600	177		
XGA	1,024	768	786,432	167		
SVGA	800	600	480,000	212		
VGA	640	480	307,200	261		
QVGA	320	240	76,800	487		
QQVGA	160	120	19,200	856		
Maximum × half	2,592	972	2,519,424	124	131	132
Maximum × minimum	2,592	8	20,736	2,051	2,142	2,159
Minimum × maximum	8	1,944	15,552	68		
Minimum × minimum	8	8	64	2,892		

Table 35: Alvium 1800 U-501m NIR ROI frame rates at 330 to 375 MBps



Frame rate values

When rolling shutter cameras are operated in triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

Alvium 1800 U-507m/c

Feature	Specification	
	1800 U-507m (monochrome)	1800 U-507c (color)
Sensor model	Sony IMX264	
Resolution	2464 (H) × 2056 (V); 5.1 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 2/3; 8.5 mm × 7.1 mm; 11.1 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	34 fps (at ≥200 MBps)	
Exposure time	176 μs to 10 s (at 200 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 2 W External power: 2.2 W	

Table 36: Alvium 1800 U-507m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-507m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 36: Alvium 1800 U-507m/c specifications (sheet 2 of 2)

Absolute QE

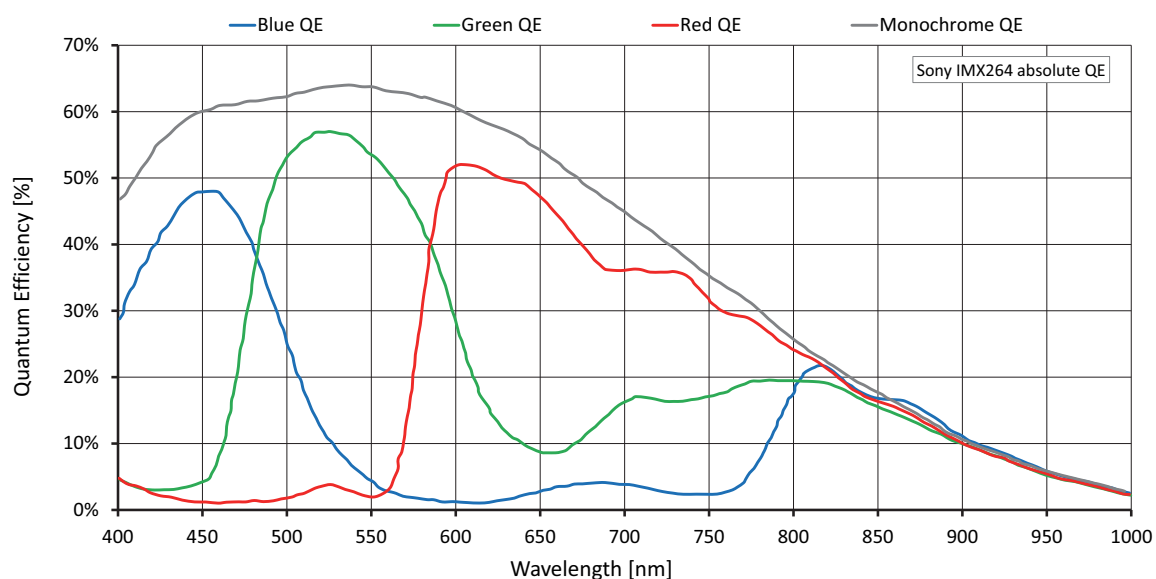


Figure 20: Alvium 1800 U-507m/c (Sony IMX264) absolute QE

Spectral response

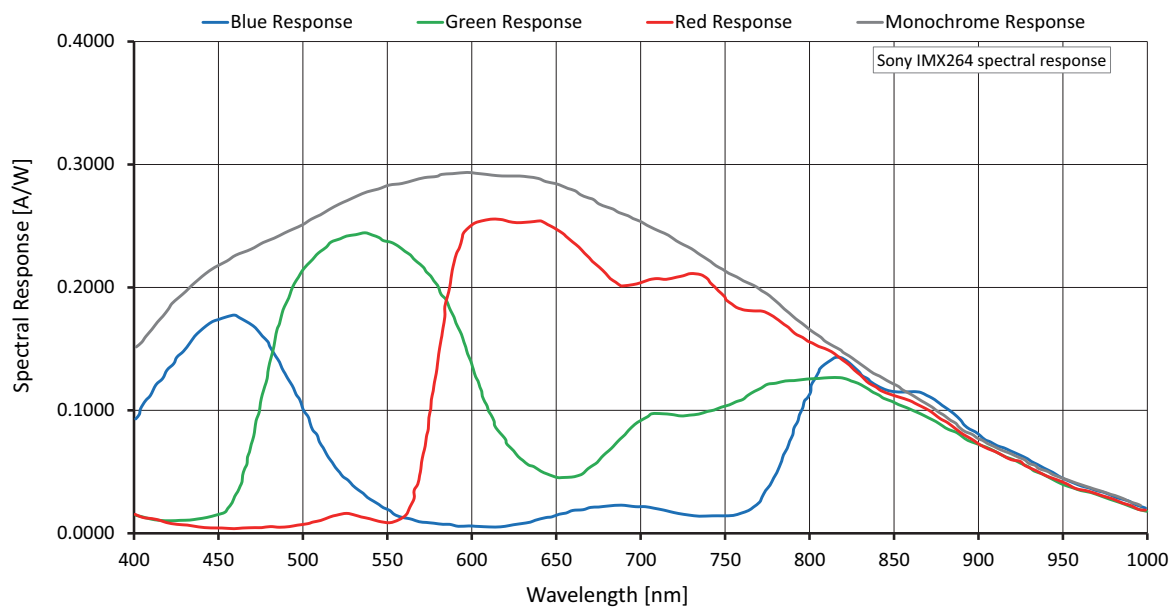


Figure 21: Alvium 1800 U-507m/c (Sony IMX264) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 200 MBps. Increasing the `DeviceLinkThroughputLimit` value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps] at 200 MBps
Full resolution	2,464	2,056	5,065,984	34
QXGA	2,048	1,536	3,145,728	46
Full HD	1,920	1,080	2,073,600	64
UXGA	1,600	1,200	1,920,000	58
WXGA+	1,440	900	1,296,000	76
SXGA	1,280	1,024	1,310,720	67
HD 720	1,280	720	921,600	94
XGA	1,024	768	786,432	89
SVGA	800	600	480,000	111
VGA	640	480	307,200	136
QVGA	320	240	76,800	248
QQVGA	160	120	19,200	416
Maximum × half	2,464	1,028	2,532,992	67
Maximum × minimum	2,464	8	19,712	892
Minimum × maximum	8	2,056	16,448	35
Minimum × minimum	8	8	64	1122

Table 37: Alvium 1800 U-507m/c ROI frame rates at 200 MBps

Alvium 1800 U-508m/c

Feature	Specification	
	1800 U-508m (monochrome)	1800 U-508c (color)
Sensor model	Sony IMX250LLR	Sony IMX250LQR
Resolution	2464 (H) x 2056 (V); 5.1 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 2/3; 8.5 mm × 7.1 mm; 11.1 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	65 fps (at ≥375 MBps)	
Exposure time	176 μs to 10 s (at 375 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 2.9 W External power: 3.1 W	

Table 38: Alvium 1800 U-508m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-508m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +85 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 38: Alvium 1800 U-508m/c specifications (sheet 2 of 2)

Absolute QE

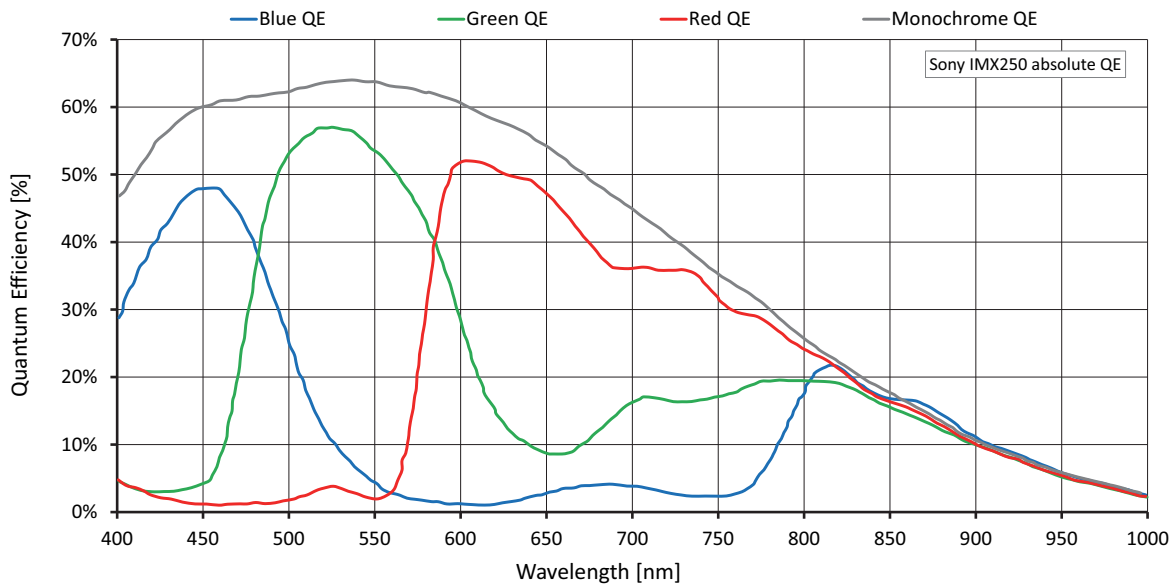


Figure 22: Alvium 1800 U-508m/c (Sony IMX250) absolute QE

Spectral response

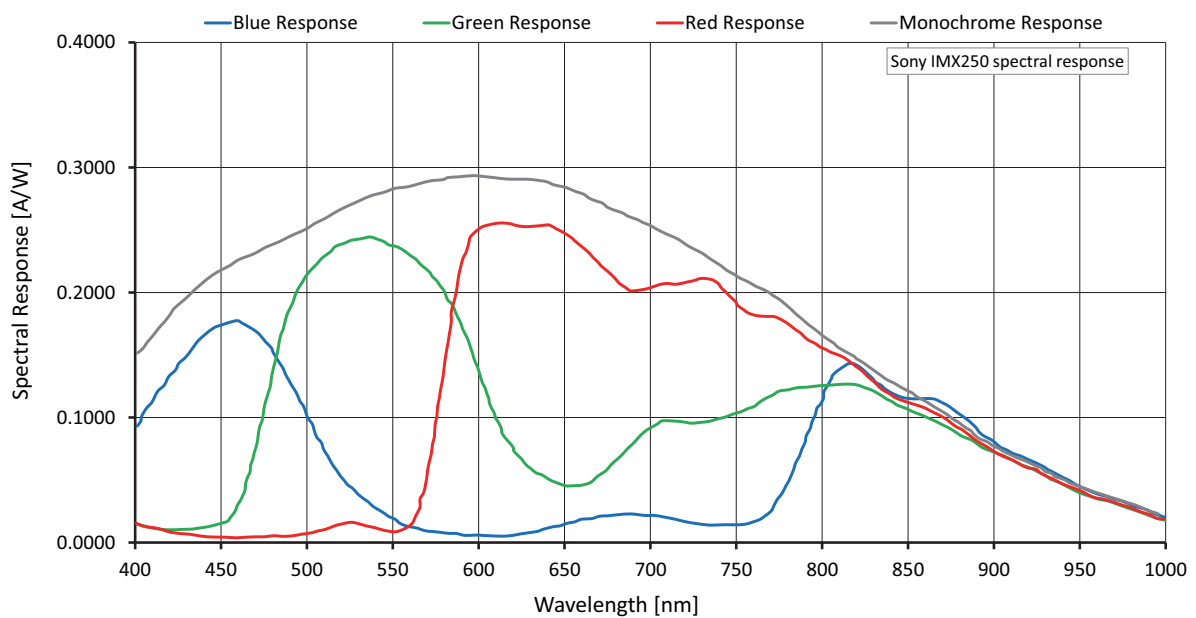


Figure 23: Alvium 1800 U-508m/c (Sony IMX250) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 375 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				200 MBps	250 MBps	300 MBps
Full resolution	2,464	2,056	5,065,984	37	47	56
QXGA	2,048	1,536	3,145,728	60	74	86
Full HD	1,920	1,080	2,073,600	89	109	120
UXGA	1,600	1,200	1,920,000	96	109	
WXGA+	1,440	900	1,296,000	138	143	
SXGA	1,280	1024	1,310,720	127		
HD 720	1,280	720	921,600	175		
XGA	1,024	768	786,432	166		
SVGA	800	600	480,000	208		
VGA	640	480	307,200	254		
QVGA	320	240	76,800	447		
QQVGA	160	120	19,200	718		
Maximum × half	2,464	1,028	2,532,992	72	90	107
Maximum × minimum	2,464	8	19,712	888	1,004	1,093
Minimum × maximum	8	2,056	16,448	66		
Minimum × minimum	8	8	64	1,653		

Table 39: Alvium 1800 U-508m/c ROI frame rates at 200 to 300 MBps



Frame rate values

Frame rates increase when bandwidth is increased, see [330 to 375 Mbps](#) on page 96.

330 to 375 Mbps

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 375 MBps. Increasing the `DeviceLinkThroughputLimit` value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				330 MBps	350 MBps	375 MBps
Full resolution	2,464	2,056	5,065,984	61	64	65
QXGA	2,048	1,536	3,145,728	86		
Full HD	1,920	1,080	2,073,600	120		
UXGA	1,600	1,200	1,920,000	109		
WXGA+	1,440	900	1,296,000	143		
SXGA	1,280	1024	1,310,720	127		
HD 720	1,280	720	921,600	175		
XGA	1,024	768	786,432	166		
SVGA	800	600	480,000	208		
VGA	640	480	307,200	254		
QVGA	320	240	76,800	447		
QQVGA	160	120	19,200	718		
Maximum × half	2,464	1,028	2,532,992	117	123	124
Maximum × minimum	2,464	8	19,712	1,137	1,171	1,185
Minimum × maximum	8	2,056	16,448	66		
Minimum × minimum	8	8	64	1,653		

Table 40: Alvium 1800 U-508m/c ROI frame rates at 330 to 375 MBps

Alvium 1800 U-1236m/c

Feature	Specification	
	1800 U-1236m (monochrome)	1800 U-1236c (color)
Sensor model	Sony IMX304	
Resolution	4112 (H) × 3008 (V); 12.4 MP	
Sensor type	CMOS	
Shutter type	Global shutter (GS)	
Sensor size	Type 1.1; 14.2 mm × 10.4 mm; 17.6 mm diagonal	
Pixel size	3.45 μm × 3.45 μm	
CRA	0 deg	
ADC	12-bit	
Monochrome pixel formats	Mono8 (default), Mono10, Mono12, Mono12p	Mono8, Mono10, Mono12, Mono12p
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)
Maximum image bit depth	12-bit	
Maximum frame rate	22 fps (at ≥300 MBps)	
Exposure time	169 μs to 10 s (at 300 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 2.9 W External power: 3.1 W	

Table 41: Alvium 1800 U-1236m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-1236m/c			
Operating temperature	Hardware option	Housing	Cooling areas ¹	Mainboard ²
	Bare board ³	Not applicable	+5 °C to +85 °C	+5 °C to +88 °C
	Open housing ⁴	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			
¹ See Mounting the heat sink on page 145.				
² Output by <code>DeviceTemperature</code>				
³ Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com .				
⁴ Temperature values must be observed for the housing and for the cooling areas.				

Table 41: Alvium 1800 U-1236m/c specifications (sheet 2 of 2)

Absolute QE

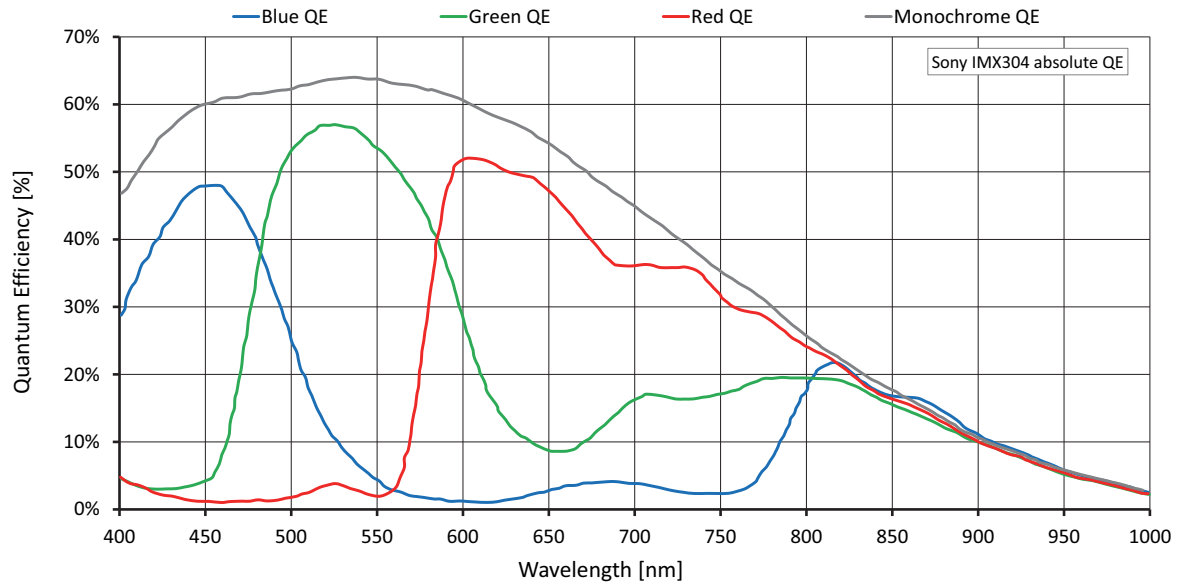


Figure 24: Alvium 1800 U-1236m/c (Sony IMX304) absolute QE

Spectral response

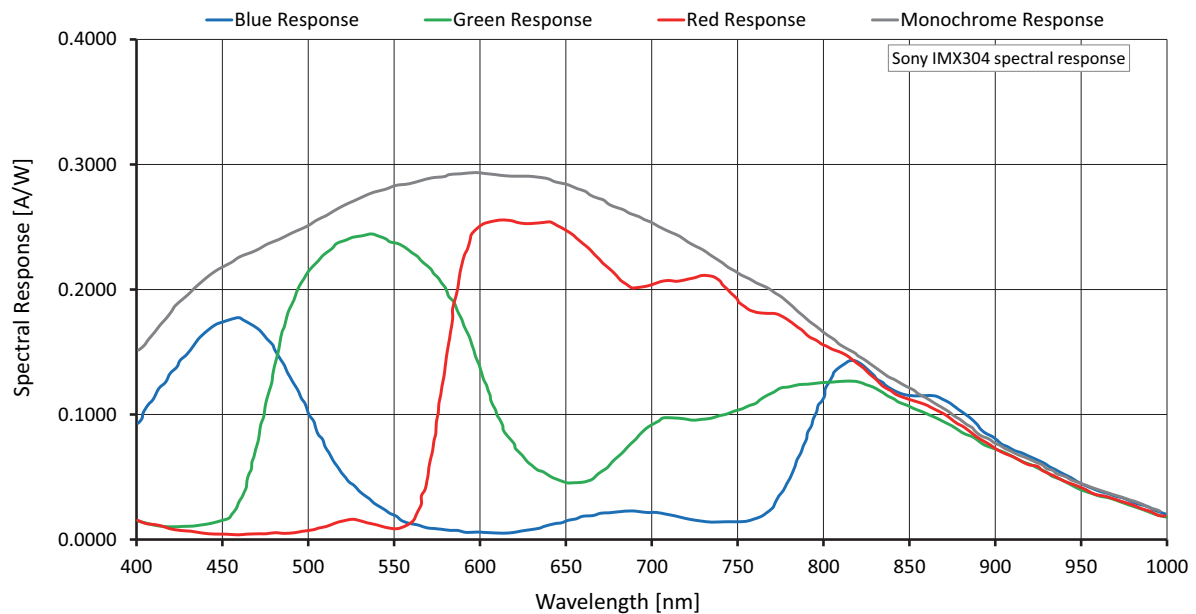


Figure 25: Alvium 1800 U-1236m/c (Sony IMX304) spectral response

ROI frame rates

Values were measured for **typical operation**, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 300 MBps. Increasing the **DeviceLinkThroughputLimit** value does not increase frame rates.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps]		
				200 MBps	250 MBps	300 MBps
Full resolution	4,112	3,008	12,368,896	15	19	22
UHD 4K	3,840	2,160	8,294,400	23	28	31
QXGA	2,560	2,048	5,242,880	33		
WQHD	2,560	1,440	3,686,400	46		
QXGA	2,048	1,536	3,145,728	44		
Full HD	1,920	1,080	2,073,600	61		
UXGA	1,600	1,200	1,920,000	55		
WXGA+	1,440	900	1,296,000	73		
SXGA	1,280	1,024	1,310,720	65		
HD 720	1,280	720	921,600	90		
XGA	1,024	768	786,432	85		
SVGA	800	600	480,000	106		
VGA	640	480	307,200	130		
QVGA	320	240	76,800	235		
QQVGA	160	120	19,200	392		
Maximum × half	4,112	1,504	6,184,448	30	38	44
Maximum × minimum	4,112	8	32,896	551	625	690
Minimum × maximum	8	3,008	24,064	23		
Minimum × minimum	8	8	64	1,030		

Table 42: Alvium 1800 U-1236m/c ROI frame rates at 200 to 300 MBps

Alvium 1800 U-1240m/c

Feature	Specification	
	1800 U-1240m (monochrome)	1800 U-1240c (color)
Sensor model	Sony IMX226	
Resolution	4024 (H) x 3036 (V); 12.2 MP	
Sensor type	CMOS	
Shutter type	Rolling shutter (RS) or Global reset shutter (GRS)	
Sensor size	Type 1/1.7; 7.4 mm × 5.6 mm; 9.33 mm diagonal	
Pixel size	1.85 μm × 1.85 μm	
CRA	0 deg	
ADC	10-bit	
Monochrome pixel formats	Mono8 (default), Mono10	Mono8, Mono10
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BGR8, RGB8 (default)
Maximum image bit depth	10-bit	
Maximum frame rate	29 fps ¹ (at ≥375 MBps)	
Exposure time	13 μs to 10 s (at 375 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 24 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed, TriggerControlled, TriggerWidth	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 3.1 W External power: 3.3 W	
¹ In triggered mode: 14 fps		

Table 43: Alvium 1800 U-1240m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-1240m/c			
Operating temperature	Hardware option	Housing	Cooling areas ²	Mainboard ³
	Bare board ⁴	Not applicable	+5 °C to +85 °C	+5 °C to +88 °C
	Open housing ⁵	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			

²See [Mounting the heat sink](#) on page 145.

³Output by `DeviceTemperature`

⁴Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com.

⁵Temperature values must be observed for the housing **and** for the cooling areas.

Table 43: Alvium 1800 U-1240m/c specifications (sheet 2 of 2)

Absolute QE

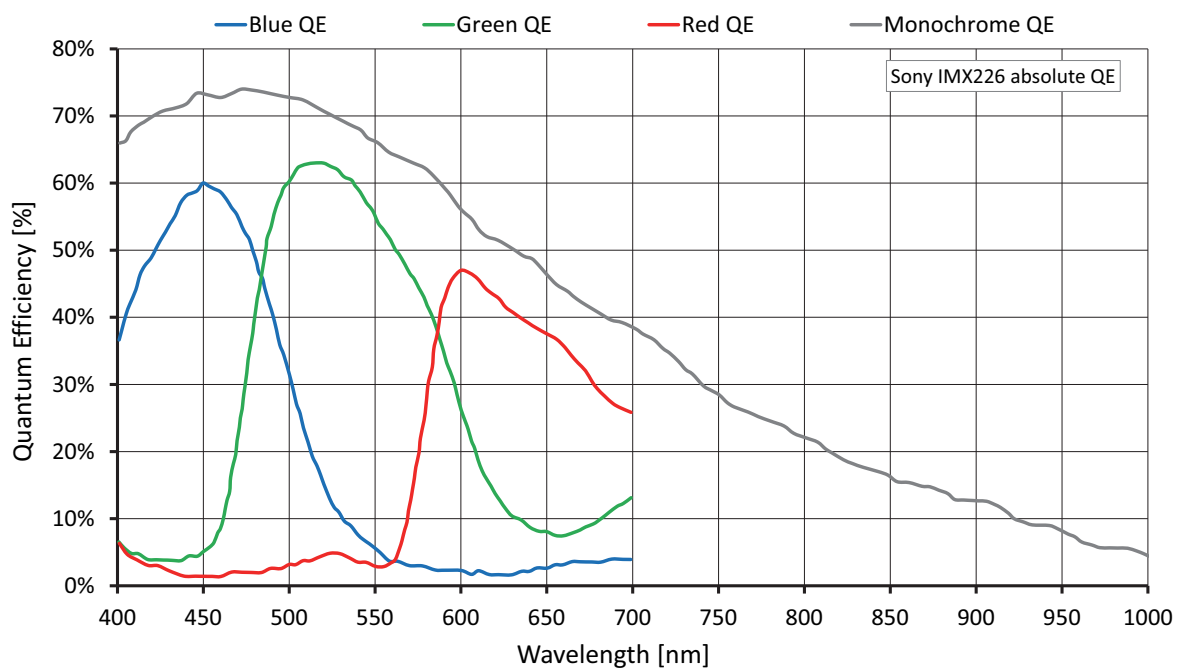


Figure 26: Alvium 1800 U-1240m/c (Sony IMX226) absolute QE

Spectral response

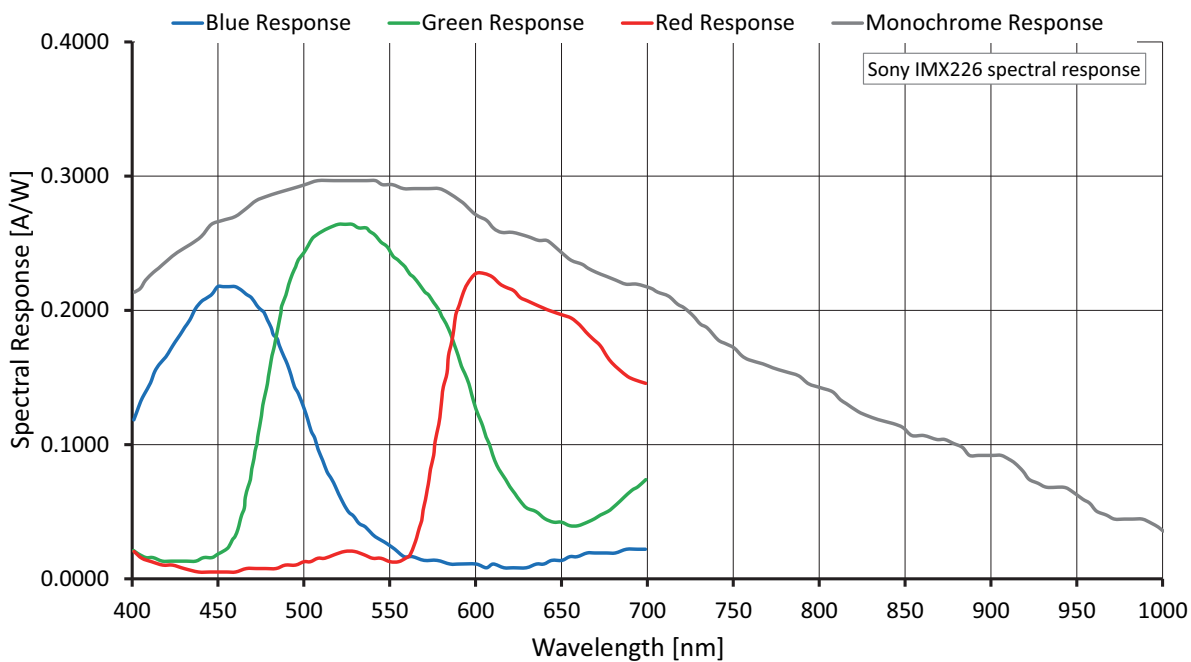


Figure 27: Alvium 1800 U-1240m/c (Sony IMX226) spectral response

ROI frame rates

200 to 300 MBps

Values were measured for **typical operation** in rolling shutter (RS) mode, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 375 MBps. Increasing the **DeviceLinkThroughputLimit** value may even increase frame rates if supported by the hardware used.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps], in RS mode		
				200 MBps	250 MBps	300 MBps
Full resolution	4,024	3,036	12,216,664	15	19	23
UHD 4K	3,840	2,160	8,294,400			
QXGA	2,560	2,048	5,242,880			
WQHD	2,560	1,440	3,686,400			
QXGA	2,048	1,536	3,145,728			
Full HD	1,920	1,080	2,073,600			
UXGA	1,600	1,200	1,920,000			
WXGA+	1,440	900	1,296,000			
SXGA	1,280	1,024	1,310,720			
HD 720	1,280	720	921,600			
XGA	1,024	768	786,432			
SVGA	800	600	480,000			
VGA	640	480	307,200			
QVGA	320	240	76,800			
QQVGA	160	120	19,200			
Maximum × half	4,024	1,518	6,108,432			
Maximum × minimum	4,024	8	32,192			
Minimum × maximum	8	3,036	24,288			
Minimum × minimum	8	8	64			

Table 44: Alvium 1800 U-1240m/c ROI frame rates at 200 to 300 MBps



Frame rate values

- Values are the same for camera operation in RS or GRS mode.
- In triggered mode, the values for maximum frame rate reached in free run mode are cut in half.
- Frame rates increase when bandwidth is increased, see [330 to 375 MBps](#) on page 105.

330 to 375 MBps

Values were measured for **typical operation** in rolling shutter (RS) mode, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 375 MBps. Increasing the **DeviceLinkThroughputLimit** value may even increase frame rates if supported by the hardware used.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps], in RS mode		
				330 MBps	350 MBps	375 MBps
Full resolution	4,024	3,036	12,216,664	26	27	29
UHD 4K	3,840	2,160	8,294,400			
QSXGA	2,560	2,048	5,242,880			
WQHD	2,560	1,440	3,686,400			
QXGA	2,048	1,536	3,145,728			
Full HD	1,920	1,080	2,073,600			
UXGA	1,600	1,200	1,920,000			
WXGA+	1,440	900	1,296,000			
SXGA	1,280	1,024	1,310,720			
HD 720	1,280	720	921,600			
XGA	1,024	768	786,432			
SVGA	800	600	480,000			
VGA	640	480	307,200			
QVGA	320	240	76,800			
QQVGA	160	120	19,200			
Maximum × half	4,024	1,518	6,108,432			
Maximum × minimum	4,024	8	32,192			
Minimum × maximum	8	3,036	24,288			
Minimum × minimum	8	8	64			

Table 45: Alvium 1800 U-1240m/c ROI frame rates at 330 to 375 MBps



Frame rate values

- Values are the same for camera operation in RS or GRS mode.
- In triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

Alvium 1800 U-2050m/c

Feature	Specification	
	1800 U-2050m (monochrome)	1800 U-2050c (color)
Sensor model	Sony IMX183	
Resolution	5496 (H) × 3672 (V); 20.2 MP	
Sensor type	CMOS	
Shutter type	Rolling shutter (RS) or Global reset shutter (GRS)	
Sensor size	Type 1; 13.1 mm × 8.8 mm; 15.86 mm diagonal	
Pixel size	2.4 μm × 2.4 μm	
CRA	3 deg	
ADC	10-bit	
Monochrome pixel formats	Mono8 (default), Mono10	Mono8, Mono10
YUV color pixel formats	Not applicable	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	Not applicable	BayerRG8, BayerRG10, BayerRG10p, BGR8, RGB8 (default)
Maximum image bit depth	10-bit	
Maximum frame rate	17 fps ¹ (at ≥375 MBps)	
Exposure time	17 μs to 10 s (at 375 MBps)	
Image buffer (RAM)	256 KB	
Non-volatile memory (Flash)	1024 KB	
Gain	0 dB to 27 dB; 0.1 dB increments	
GPIOs	4 programmable GPIOs As direct inputs (push-pull): 0 to 5.5 VDC As direct outputs (push-pull): 0 to 3.3 VDC at 12 mA	
ExposureModes	Timed	
Power requirements	Power over USB; External power	
Power consumption (typical, at 5 VDC)	USB power: 3.2 W External power: 3.4 W	
¹ In triggered mode: 8 fps		

Table 46: Alvium 1800 U-2050m/c specifications (sheet 1 of 2)

Feature	Specification			
	1800 U-2050m/c			
Operating temperature	Hardware option	Housing	Cooling areas ²	Mainboard ³
	Bare board ⁴	Not applicable	+5 °C to +85 °C	+5 °C to +88 °C
	Open housing ⁵	+5 °C to +65 °C		
	Closed housing	+5 °C to +65 °C	Not applicable	
Relative humidity	0% to 80% (non-condensing)			
Digital interface	Micro-B USB 3.1 Gen 1 interface			
Camera controls	GenICam V2.0 (GenICam Access)			

²See [Mounting the heat sink](#) on page 145.

³Output by `DeviceTemperature`

⁴Ensure that the sensor is operated in the temperature range specified by the manufacturer. For any questions, please contact support@alliedvision.com.

⁵Temperature values must be observed for the housing **and** for the cooling areas.

Table 46: Alvium 1800 U-2050m/c specifications (sheet 2 of 2)

Absolute QE

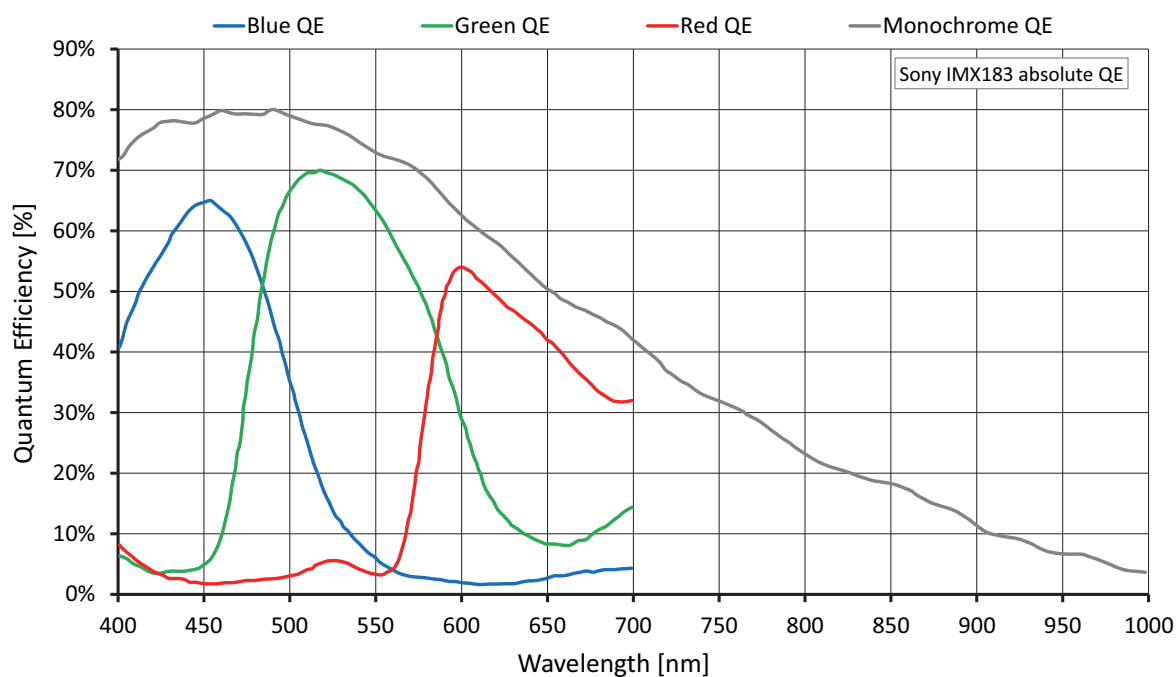


Figure 28: Alvium 1800 U-2050m/c (Sony IMX183) absolute QE

Spectral response

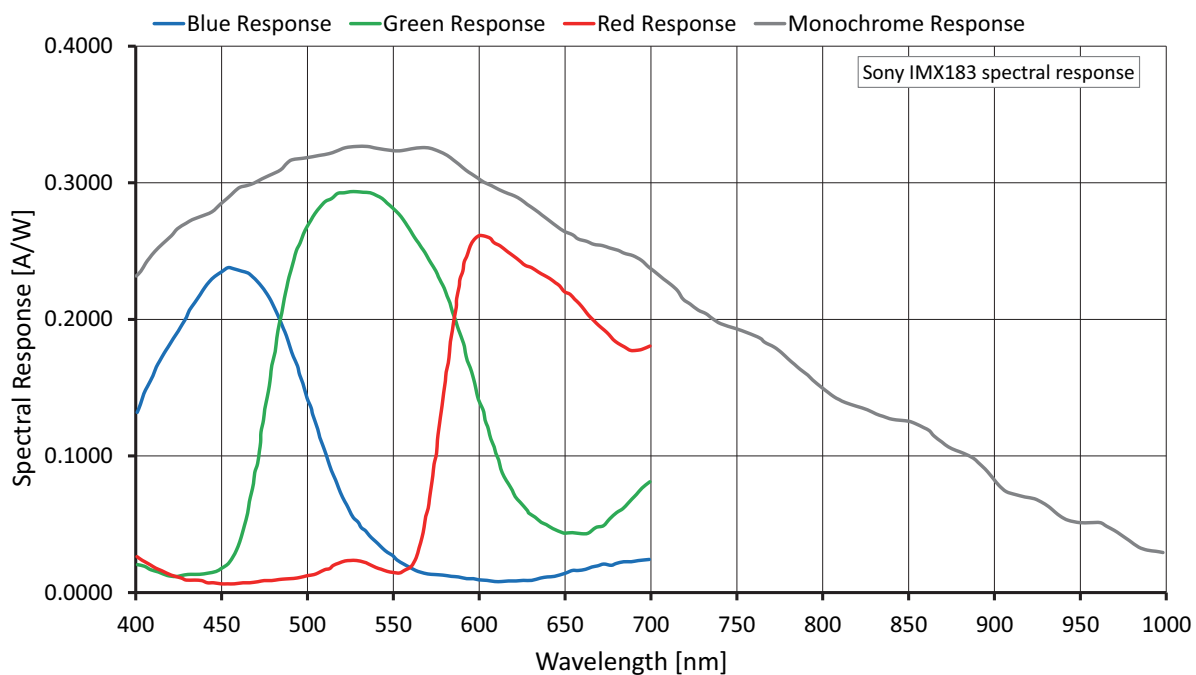


Figure 29: Alvium 1800 U-2050m/c (Sony IMX183) spectral response

ROI frame rates

200 to 300 MBps

Values were measured for **typical operation** in rolling shutter (RS) mode, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 375 MBps. Increasing the **DeviceLinkThroughputLimit** value may even increase frame rates if supported by the hardware used.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps], in RS mode		
				200 MBps	250 MBps	300 MBps
Full resolution	5,496	3,672	20,181,312	9	12	14
HXGA	4,096	3,072	12,582,912	11	14	17
UHD 4K	3,840	2,160	8,294,400	16	20	24
QSXGA	2,560	2,048	5,242,880	17	21	25
WQHD	2,560	1,440	3,686,400	18	23	28
QXGA	2,048	1,536	3,145,728			
Full HD	1,920	1,080	2,073,600			
UXGA	1,600	1,200	1,920,000			
WXGA+	1,440	900	1,296,000			
SXGA	1,280	1,024	1,310,720			
HD 720	1,280	720	921,600			
XGA	1,024	768	786,432			
SVGA	800	600	480,000			
VGA	640	480	307,200			
QVGA	320	240	76,800			
QQVGA	160	120	19,200			
Maximum × half	5,496	1,836	10,090,656			
Maximum × minimum	5,496	8	43,968			
Minimum × maximum	8	3,672	29,376	9	12	14
Minimum × minimum	8	8	64	18	23	28

Table 47: Alvium 1800 U-2050m/c ROI frame rates at 200 to 300 MBps



Frame rate values

- In GRS mode, the values for maximum frame rate reached in RS mode apply to all resolutions.
- In triggered mode, the values for maximum frame rate reached in free run mode are cut in half.
- Frame rates increase when bandwidth is increased, see [330 to 375 MBps](#) on page 110.

330 to 375 MBps

Values were measured for **typical operation** in rolling shutter (RS) mode, using the test setup defined in [Exposure time and frame rate](#) on page 49.

To reach the maximum frame rate available for typical operation, the bandwidth for image traffic is 375 MBps. Increasing the **DeviceLinkThroughputLimit** value may even increase frame rates if supported by the hardware used.

Image format	Width [pixels]	Height [pixels]	ROI area [pixels]	Frame rate [fps], in RS mode		
				330 MBps	350 MBps	375 MBps
Full resolution	5,496	3,672	20,181,312	15	16	17
HXGA	4,096	3,072	12,582,912	18	19	21
UHD 4K	3,840	2,160	8,294,400	26	28	29
QSXGA	2,560	2,048	5,242,880	27	29	31
WQHD	2,560	1,440	3,686,400	30	32	34
QXGA	2,048	1,536	3,145,728			
Full HD	1,920	1,080	2,073,600			
UXGA	1,600	1,200	1,920,000			
WXGA+	1,440	900	1,296,000			
SXGA	1,280	1,024	1,310,720			
HD 720	1,280	720	921,600			
XGA	1,024	768	786,432			
SVGA	800	600	480,000			
VGA	640	480	307,200			
QVGA	320	240	76,800			
QQVGA	160	120	19,200			
Maximum × half	5,496	1,836	10,090,656	15	16	17
Maximum × minimum	5,496	8	43,968			
Minimum × maximum	8	3,672	29,376			
Minimum × minimum	8	8	64	30	32	34

Table 48: Alvium 1800 U-2050m/c ROI frame rates at 330 to 375 MBps



Frame rate values

- In GRS mode, the values for maximum frame rate reached in RS mode apply to all resolutions.
- In triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

White balance default

Alvium color cameras are balanced for neutral color reproduction with an illumination of 5000 °K (warm daylight). Table 49 shows default values for the red and blue channel by model.

For different illuminations, use auto white balance or adapt the color channel values manually.



Feature description

See the descriptions in the Alvium Features Reference at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation.

Alvium model	Sensor model	Red channel value	Blue channel value
1800 U-040	Sony IMX287	2.355	2.100
1800 U-050	ON Semiconductor PYTHON 480	1.930	1.500
1800 U-120	ON Semiconductor 0135CS	1.760	1.650
1800 U-158	Sony IMX273	2.355	2.100
1800 U-240	Sony IMX392	2.350	2.080
1800 U-319	Sony IMX265	2.390	2.120
1800 U-500	ON Semiconductor 0521SR	2.120	1.520
1800 U-501 m NIR	ON Semiconductor 0521SR	Monochrome camera without color channels	
1800 U-507	Sony IMX264	2.355	2.100
1800 U-508	Sony IMX250	2.320	2.120
1800 U-1236	Sony IMX304	2.360	2.080
1800 U-1240	Sony IMX226	2.620	1.810
1800 U-2050	Sony IMX183	2.660	1.830

Table 49: Alvium default values for color channels

Dimensions and mass

Bare board

Feature	Standard	USB 90°
Dimensions (L × W × H [mm])	[Model specific] × 26 × 26	[Model specific] × 30 × 26
Mass	15 g	15 g

Table 50: Bare board dimensions and mass

Open housing

Open housing	S-Mount	CS-Mount	C-Mount
Flange focal distance, optical [mm]	12.63	12.526	17.526
Thread [mm]	M12 × 0.5	1x32TPI-UNS-2B	1x32TPI-UNS-2B
Maximum protrusion ¹ [mm]	11.0	8.6	13.6
Body dimensions (L × W × H [mm])	25 × 29 × 29	25 × 29 × 29	30 × 29 × 29
Mass	45 g	40 g	45 g
¹ For details, see Lens mounts and maximum protrusion .			

Table 51: Open housing dimensions and mass

Open housing 90°

USB 90° open housing	S-Mount	CS-Mount	C-Mount
Flange focal distance, optical [mm]	12.63	12.526	17.526
Thread [mm]	M12 × 0.5	1x32TPI-UNS-2B	1x32TPI-UNS-2B
Maximum protrusion ¹ [mm]	11.0	8.6	13.6
Body dimensions (L × W × H [mm])	25 × 32 × 29	25 × 32 × 29	30 × 32 × 29
Mass	45 g	45 g	50 g
¹ For details, see Lens mounts and maximum protrusion .			

Table 52: Open housing 90° dimensions and mass

Closed housing

Closed housing	S-Mount	CS-Mount	C-Mount
Flange focal distance, optical [mm]	12.63	12.526	17.526
Thread [mm]	M12 × 0.5	1x32TPI-UNS-2B	1x32TPI-UNS-2B
Maximum protrusion ¹ [mm]	11.0	8.6	13.6
Body dimensions (L × W × H [mm])	33 × 29 × 29	33 × 29 × 29	38 × 29 × 29
Mass	60 g	60 g	60 g
¹ For details, see Lens mounts and maximum protrusion .			


Table 53: Closed housing dimensions and mass

Closed housing 90°

USB 90° closed housing	S-Mount	CS-Mount	C-Mount
Flange focal distance, optical [mm]	12.63	12.526	17.526
Thread [mm]	M12 × 0.5	1x32TPI-UNS-2B	1x32TPI-UNS-2B
Maximum protrusion ¹ [mm]	11.0	8.6	13.6
Body dimensions (L × W × H [mm])	33 × 32 × 29	33 × 32 × 29	38 × 32 × 29
Mass	65 g	60 g	65 g
¹ For details, see Lens mounts and maximum protrusion .			

Table 54: Closed housing 90° dimensions and mass















Technical drawings

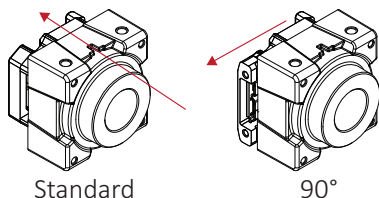

USB connector position

- **Standard:** The connector is at the camera backside. This option is not mentioned in the naming for camera hardware options.
- **90°:** The connector is at the camera left side, as seen from the lens mount. This option is named **90°**.

Alvium USB cameras are available as shown in the following table:

Bare Board					
Standard			90°		
					
page 115			page 117		
Open Housing					
Standard			90°		
S-Mount	CS-Mount	C-Mount	S-Mount	CS-Mount	C-Mount
					
page 118	page 119	page 120	page 121	page 122	page 123
Closed Housing					
Standard			90°		
S-Mount	CS-Mount	C-Mount	S-Mount	CS-Mount	C-Mount
					
page 124	page 125	page 126	page 127	page 128	page 129

Bare Board

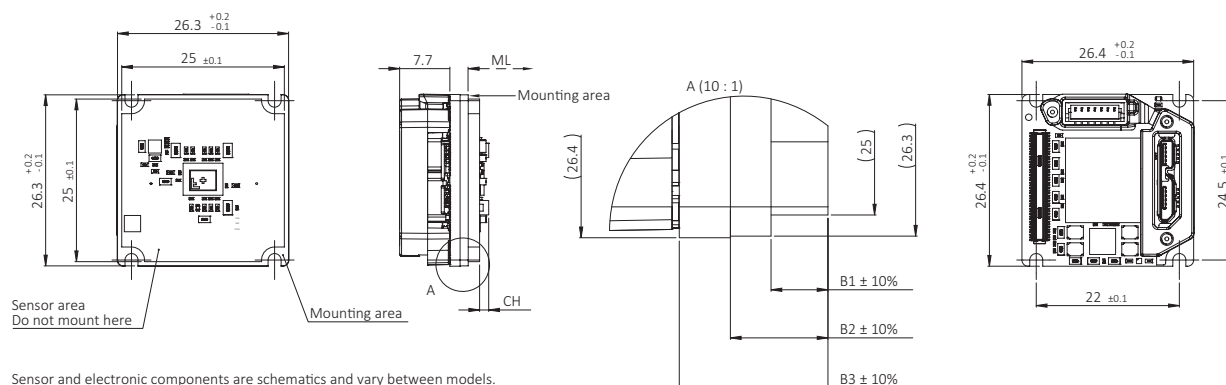


Figure 30: Bare Board dimensions

Dimensions that are common between different models are shown in [Figure 30](#), model specific dimensions are listed in [Table 55](#). **Mechanical length (ML)** defines the mechanical distance from the mounting area to the lens mount front flange, without optical filter. **Components height (CH)** relates to the electronic components with maximum height, in some cases the sensor.



Mechanical length for S-Mount and CS-Mount

Mechanical length for other mounts is:

- CS-Mount: [C-Mount value] – 5 mm
- S-Mount: depending on your design.

Camera model	ML: Mechanical length* for C-Mount	CH: Components height, incl. the sensor	B1: Board thickness	B2: Board thickness	B3: Board thickness
Alvium 1800 U-040m/c	19.897 mm	2.27 mm	1.20 mm	2.20 mm	3.75 mm
Alvium 1800 U-050m/c	19.604 mm	1.40 mm	1.75 mm	3.00 mm	4.55 mm
Alvium 1800 U-120m/c	19.689 mm	1.44 mm	1.25 mm	2.40 mm	3.95 mm
Alvium 1800 U-158m/c	19.897 mm	2.27 mm	1.20 mm	2.20 mm	3.75 mm
Alvium 1800 U-240m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-319m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-500m/c	19.739 mm	1.67 mm	1.30 mm	2.40 mm	3.95 mm
Alvium 1800 U-501m NIR	19.739 mm	1.67 mm	1.30 mm	2.40 mm	3.95 mm
Alvium 1800 U-507m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-508m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-1236m/c	19.829 mm	2.27 mm	1.15 mm	2.20 mm	3.75 mm
Alvium 1800 U-1240m/c	19.763 mm	2.20 mm	1.15 mm	2.20 mm	3.75 mm
*Theoretical values					

Table 55: Bare Board model specific dimensions and nominal values (sheet 1 of 2)

Camera model	ML: Mechanical length* for C-Mount	CH: Components height, incl. the sensor	B1: Board thickness	B2: Board thickness	B3: Board thickness
Alvium 1800 U-2050m/c	19.663 mm	2.87 mm	1.05 mm	2.20 mm	3.75 mm
*Theoretical values					

Table 55: Bare Board model specific dimensions and nominal values (sheet 2 of 2)

Bare Board 90°

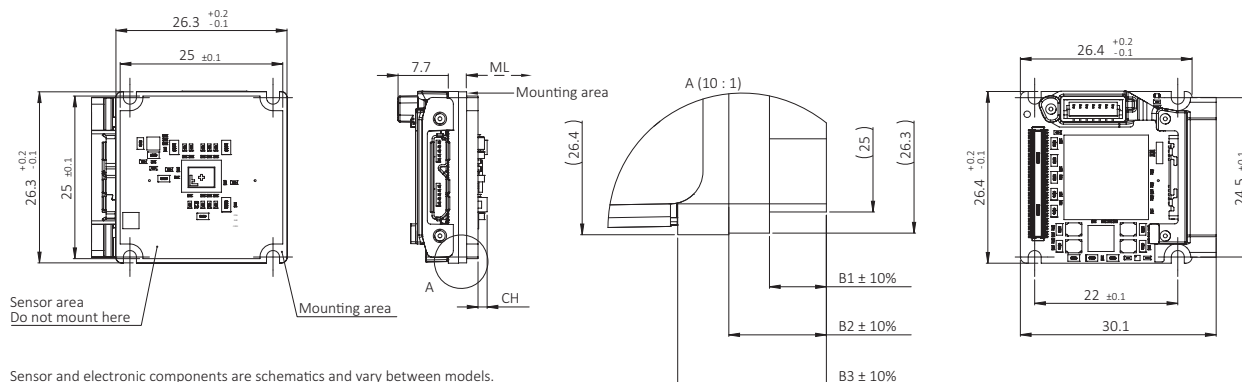


Figure 31: Bare Board 90° dimensions

Dimensions that are common between different models are shown in [Figure 31](#), model specific dimensions are listed in [Table 56](#). **Mechanical length (ML)** defines the mechanical distance from the mounting area to the lens mount front flange, without optical filter. **Components height (CH)** relates to the electronic components with maximum height, in some cases the sensor.



Mechanical length for S-Mount and CS-Mount

Mechanical length for other mounts is:

- CS-Mount: [C-Mount value] – 5 mm
- S-Mount: depending on your design.

Camera model	ML: Mechanical length* for C-Mount	CH: Components height, incl. the sensor	B1: Board thickness	B2: Board thickness	B3: Board thickness
Alvium 1800 U-040m/c	19.897 mm	2.27 mm	1.20 mm	2.20 mm	3.75 mm
Alvium 1800 U-050m/c	19.604 mm	1.40 mm	1.75 mm	3.00 mm	4.55 mm
Alvium 1800 U-120m/c	19.689 mm	1.44 mm	1.25 mm	2.40 mm	3.95 mm
Alvium 1800 U-158m/c	19.897 mm	2.27 mm	1.20 mm	2.20 mm	3.75 mm
Alvium 1800 U-240m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-319m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-500m/c	19.739 mm	1.67 mm	1.30 mm	2.40 mm	3.95 mm
Alvium 1800 U-501m NIR	19.739 mm	1.67 mm	1.30 mm	2.40 mm	3.95 mm
Alvium 1800 U-507m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-508m/c	19.929 mm	2.27 mm	1.25 mm	2.20 mm	3.75 mm
Alvium 1800 U-1236m/c	19.829 mm	2.27 mm	1.15 mm	2.20 mm	3.75 mm
*Theoretical values					

Table 56: Bare Board 90° model specific dimensions and nominal values
(sheet 1 of 2)

Camera model	ML: Mechanical length* for C-Mount	CH: Components height, incl. the sensor	B1: Board thickness	B2: Board thickness	B3: Board thickness
Alvium 1800 U-1240m/c	19.763 mm	2.20 mm	1.15 mm	2.20 mm	3.75 mm
Alvium 1800 U-2050m/c	19.663 mm	2.87 mm	1.05 mm	2.20 mm	3.75 mm
*Theoretical values					

Table 56: Bare Board 90° model specific dimensions and nominal values
(sheet 2 of 2)

Open Housing S-Mount

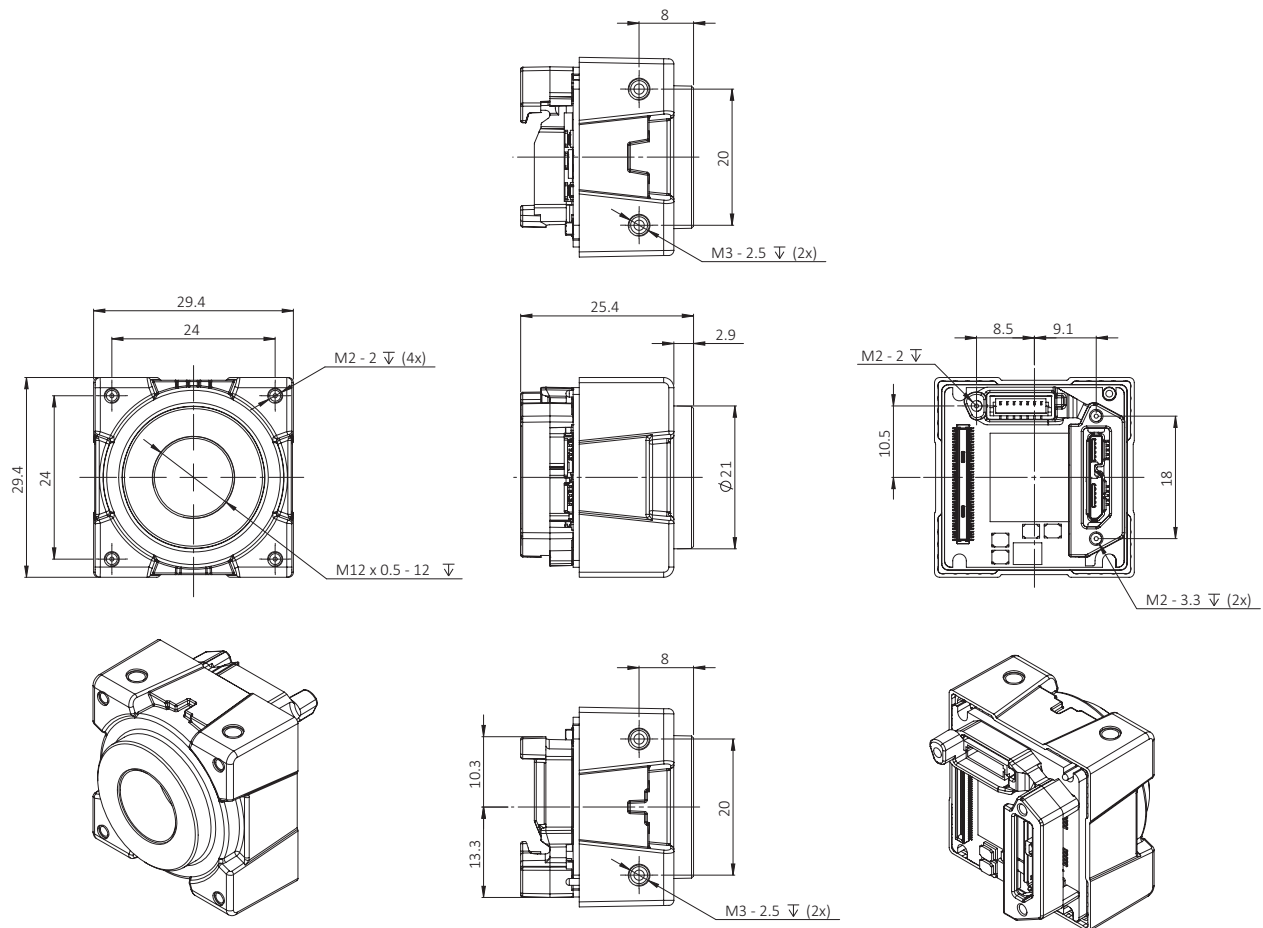


Figure 32: Open Housing S-Mount dimensions

Open Housing CS-Mount

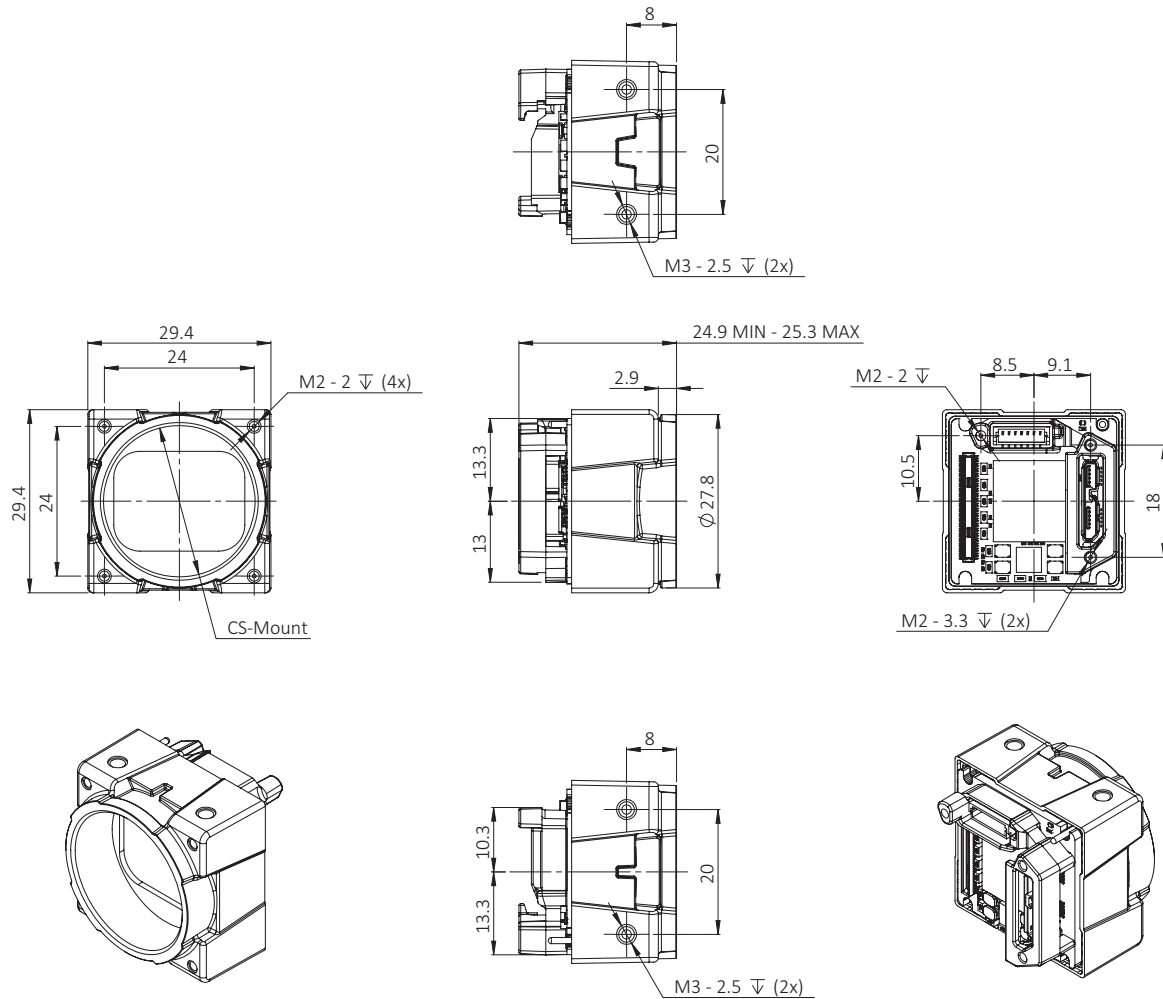


Figure 33: Open Housing CS-Mount dimensions

Open Housing C-Mount

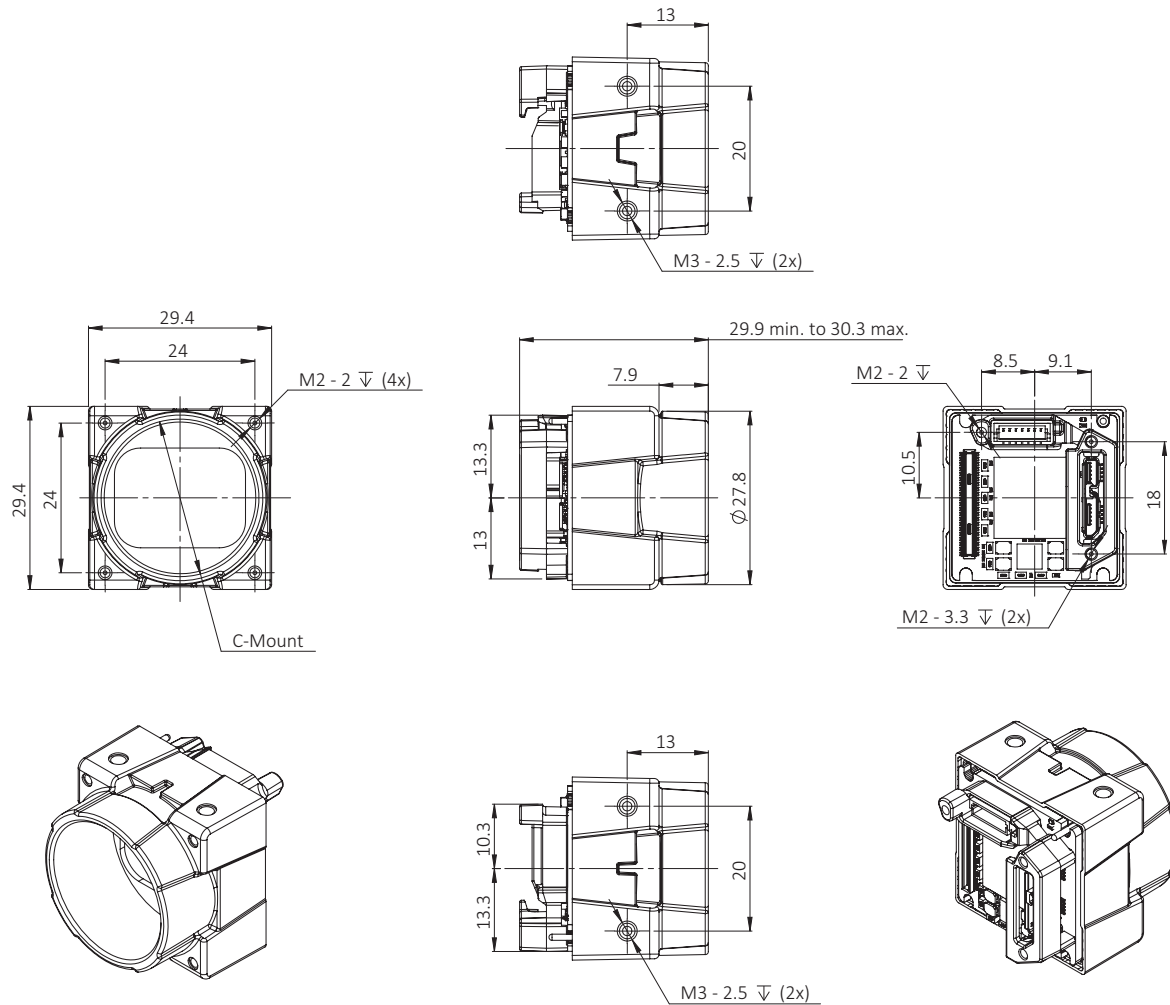


Figure 34: Open Housing C-Mount dimensions

Open Housing S-Mount 90°

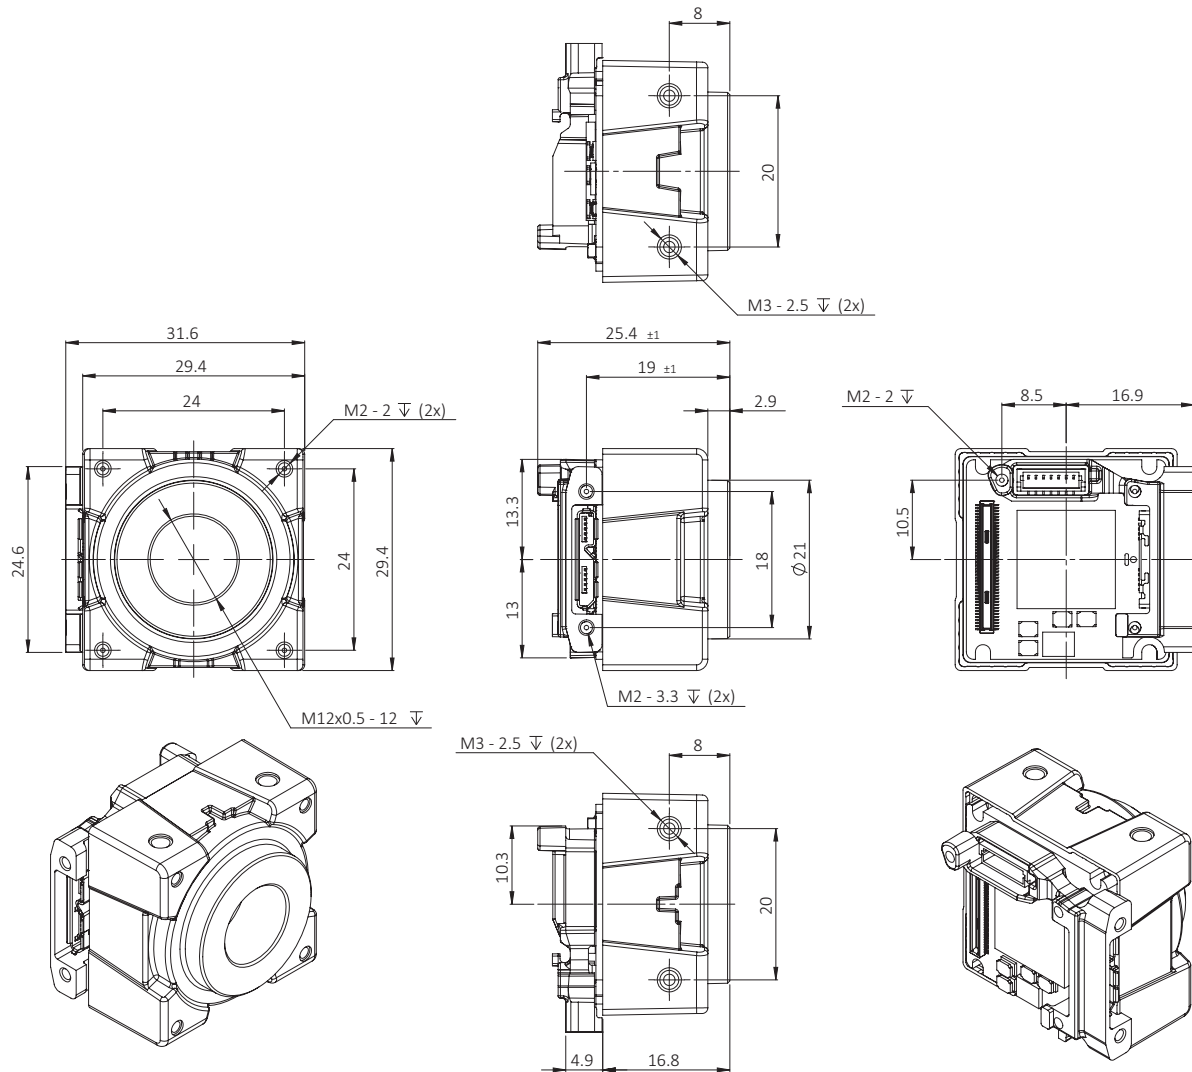


Figure 35: Open Housing S-Mount 90° dimensions

Open Housing CS-Mount 90°

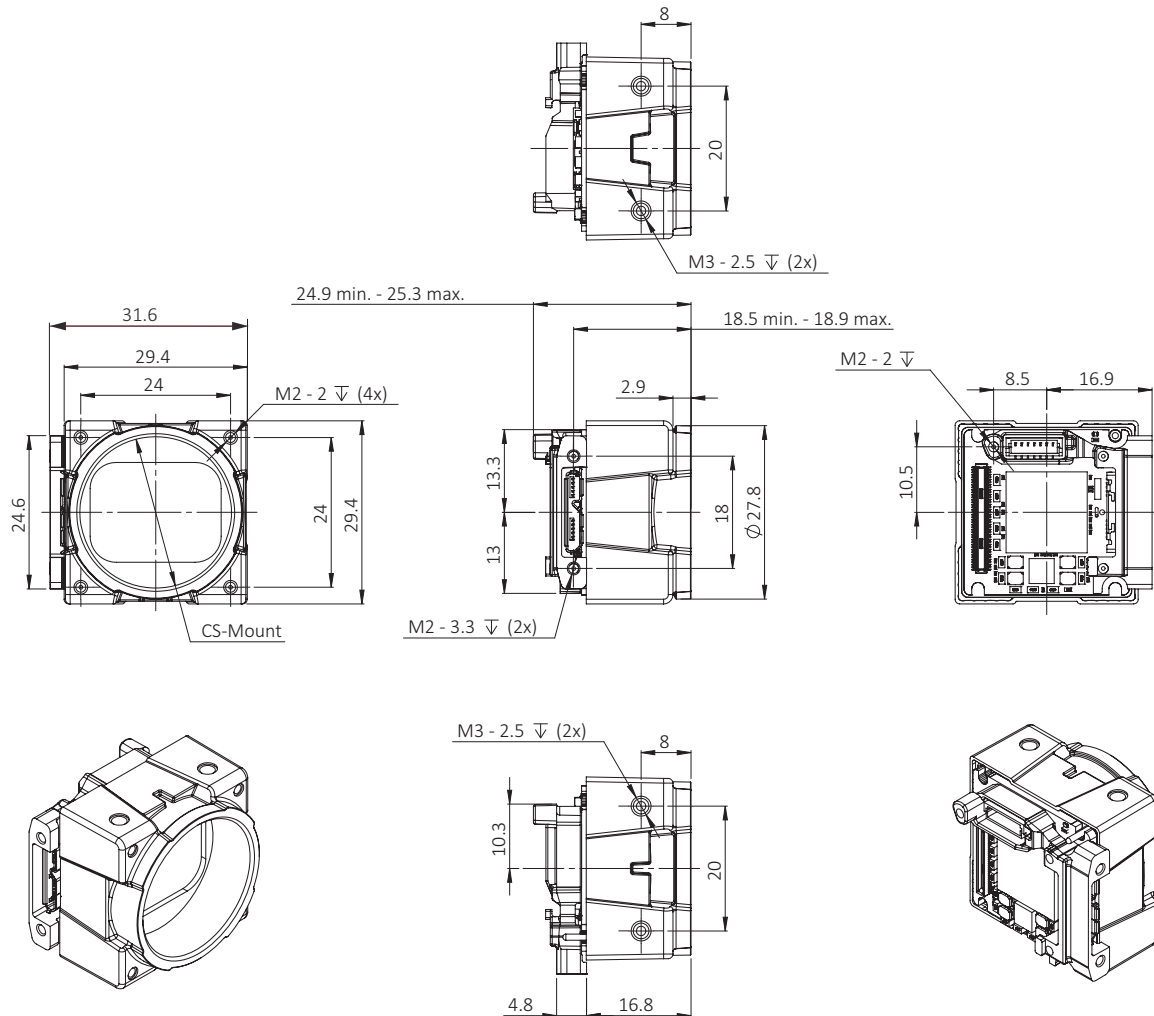


Figure 36: Open Housing CS-Mount 90° dimensions

Technical drawings of the M262 camera module showing dimensions in mm:

- Front View:**
 - Overall width: 31.6
 - Mounting hole pitch: 29.4
 - Mounting hole diameter: 24
 - Mounting hole offset: 24.6
 - Mounting hole diameter: 24
 - Mounting hole offset: 29.4
 - Mounting holes: M2 - 2 ∇ (4x)
 - Mounting type: C-Mount
- Top View:**
 - Overall width: 29.9 min. to 30.3 max.
 - Mounting hole pitch: 23.5 min. to 23.9 max.
 - Mounting hole offset: 7.9
 - Mounting hole diameter: 13.3
 - Mounting hole offset: 13
 - Mounting hole diameter: 18
 - Mounting hole offset: $\varnothing 27.8$
 - Mounting holes: M2 - 3.3 ∇ (2x)
- Bottom View:**
 - Mounting hole pitch: 8.5
 - Mounting hole offset: 16.9
 - Mounting hole diameter: 10.5
 - Mounting holes: M2 - 2 ∇
- Side View (Left):**
 - Mounting hole pitch: 13
 - Mounting hole offset: 20
 - Mounting hole diameter: 10.3
 - Mounting hole offset: 4.8
 - Mounting hole diameter: 21.8
 - Mounting holes: M3 - 2.5 ∇ (2x)
- Side View (Right):**
 - Mounting hole pitch: 13
 - Mounting hole offset: 20
 - Mounting hole diameter: 10.3
 - Mounting hole offset: 4.8
 - Mounting hole diameter: 21.8
 - Mounting holes: M3 - 2.5 ∇ (2x)

Alvium USB Cameras User Guide V3.2.2

Closed Housing S-Mount

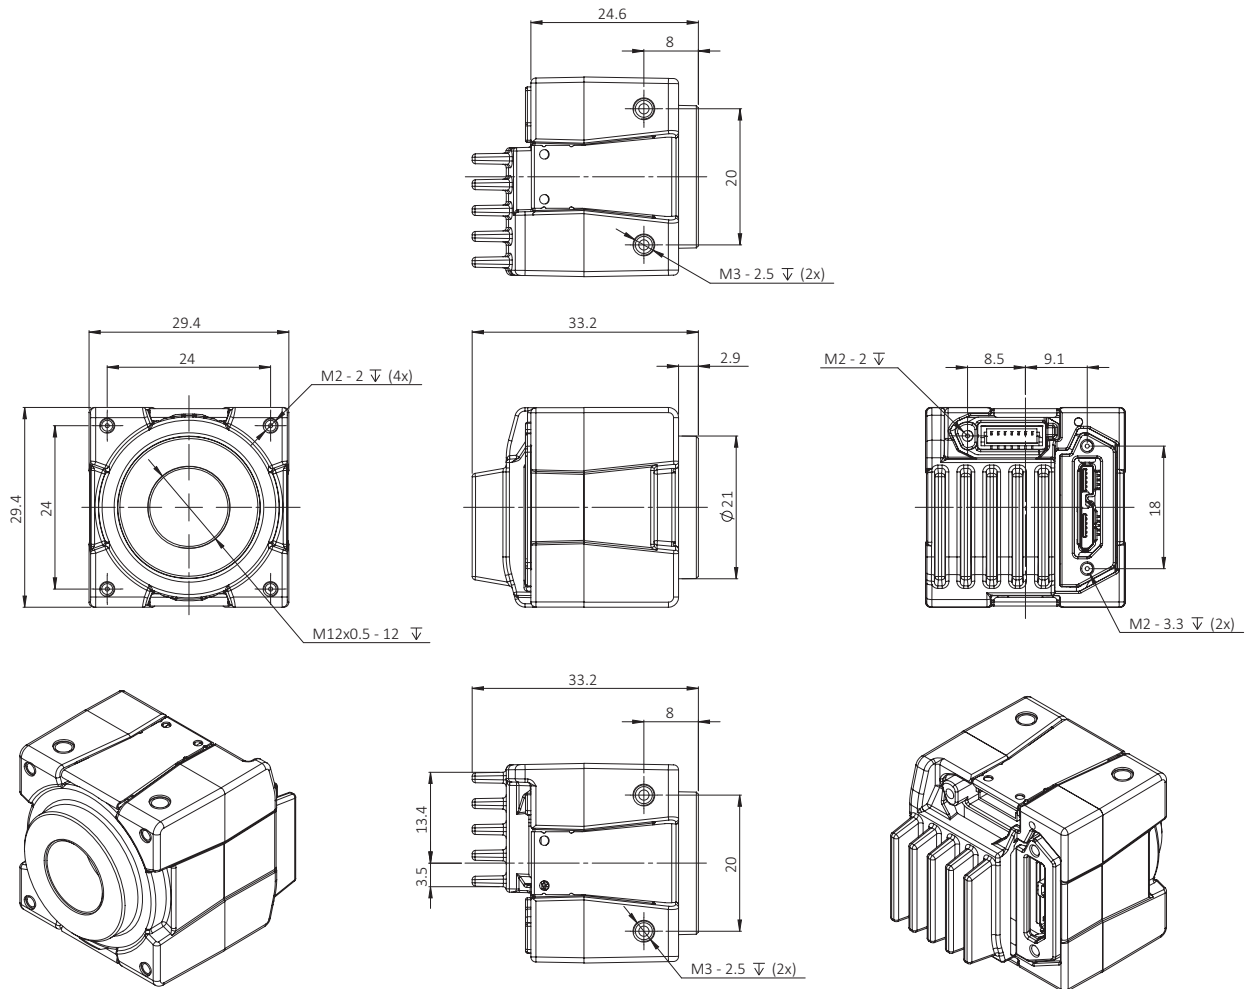


Figure 38: Closed Housing S-Mount dimensions

Closed Housing CS-Mount

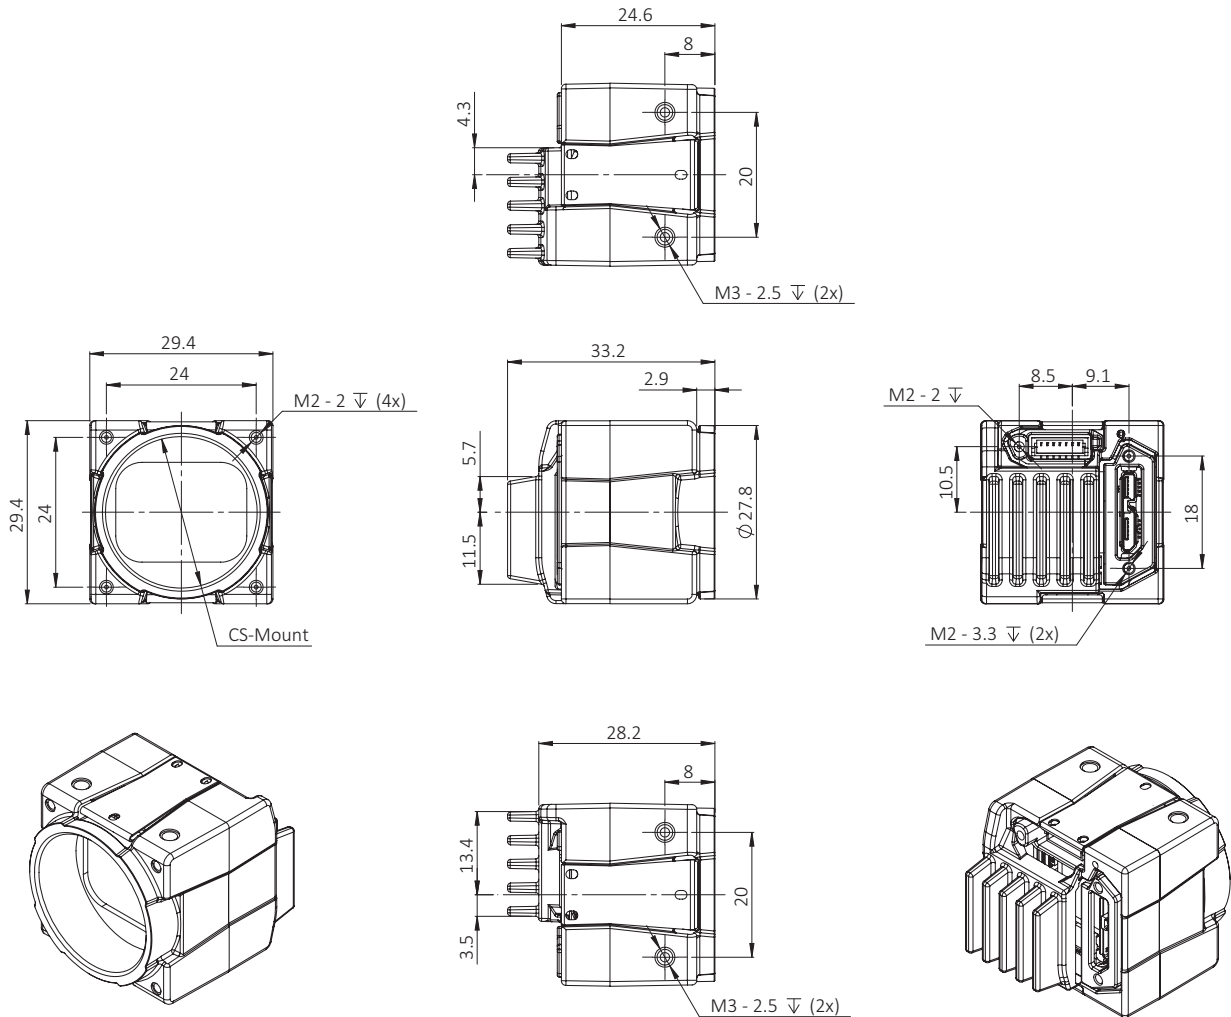


Figure 39: Closed Housing CS-Mount dimensions

Closed Housing C-Mount

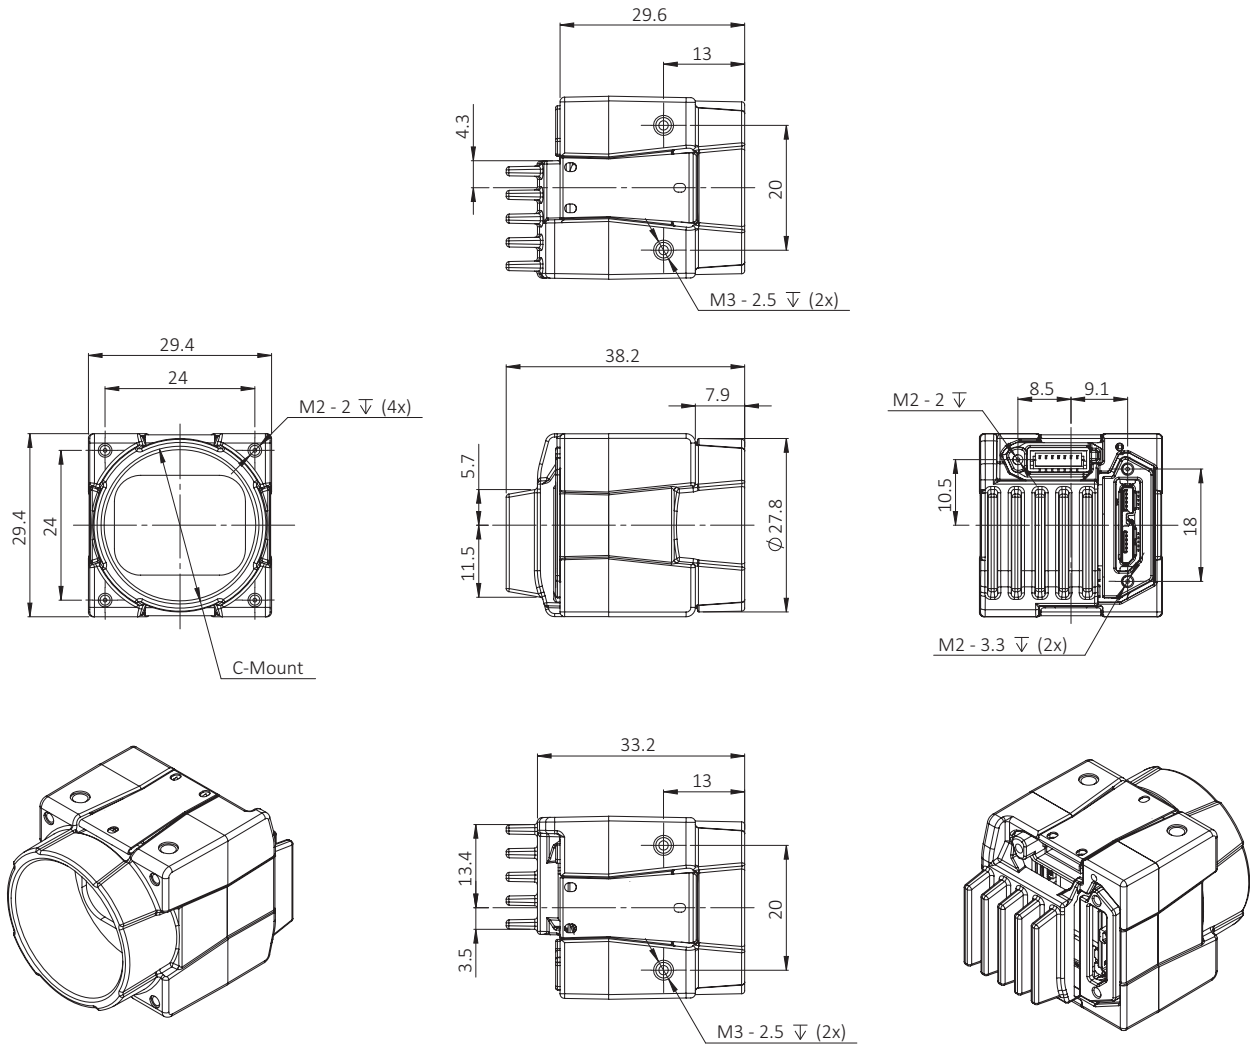


Figure 40: Closed Housing C-Mount dimensions

Closed Housing S-Mount 90°

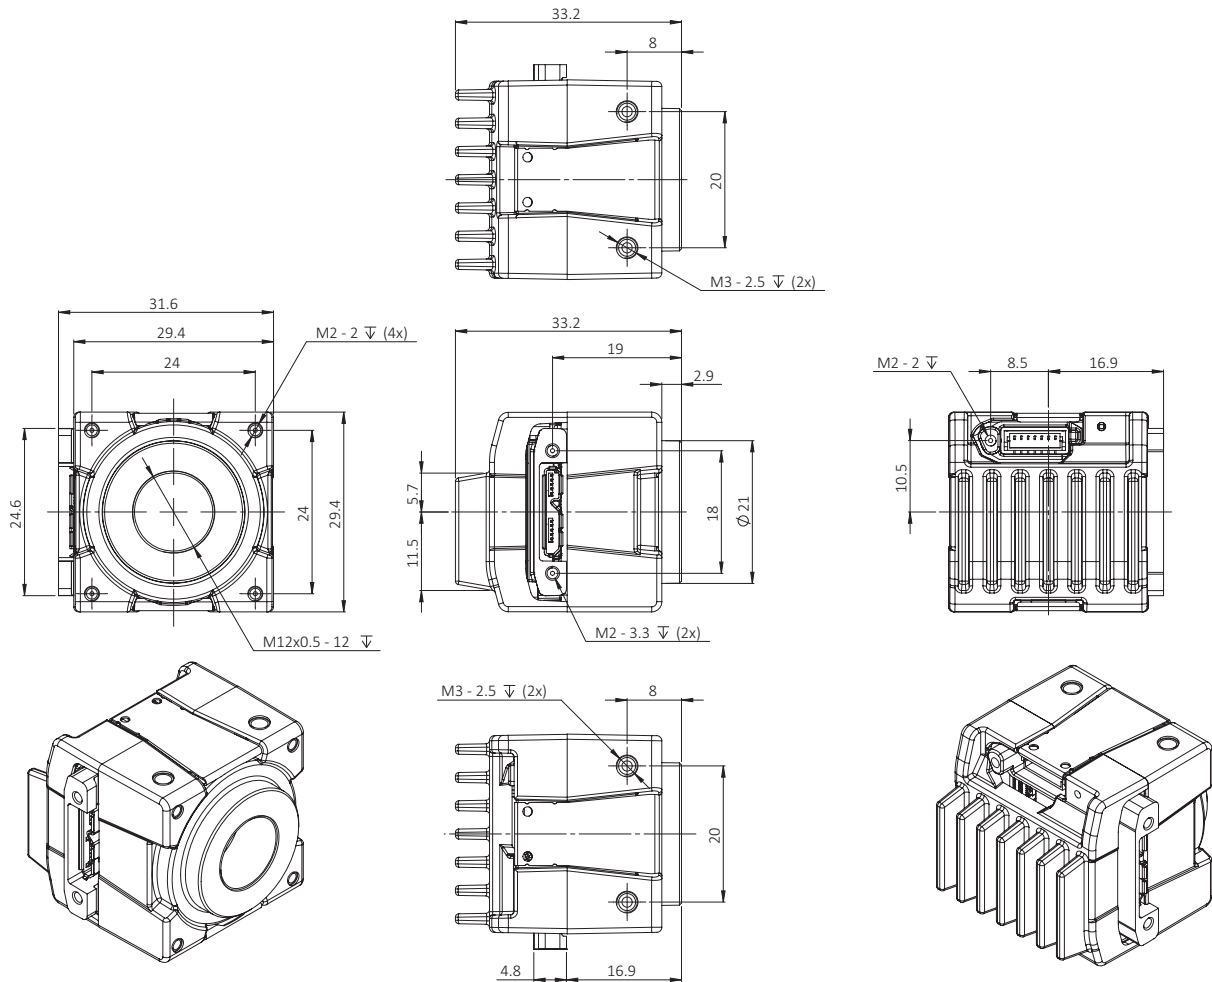


Figure 41: Closed Housing S-Mount 90° dimensions

Closed Housing CS-Mount 90°

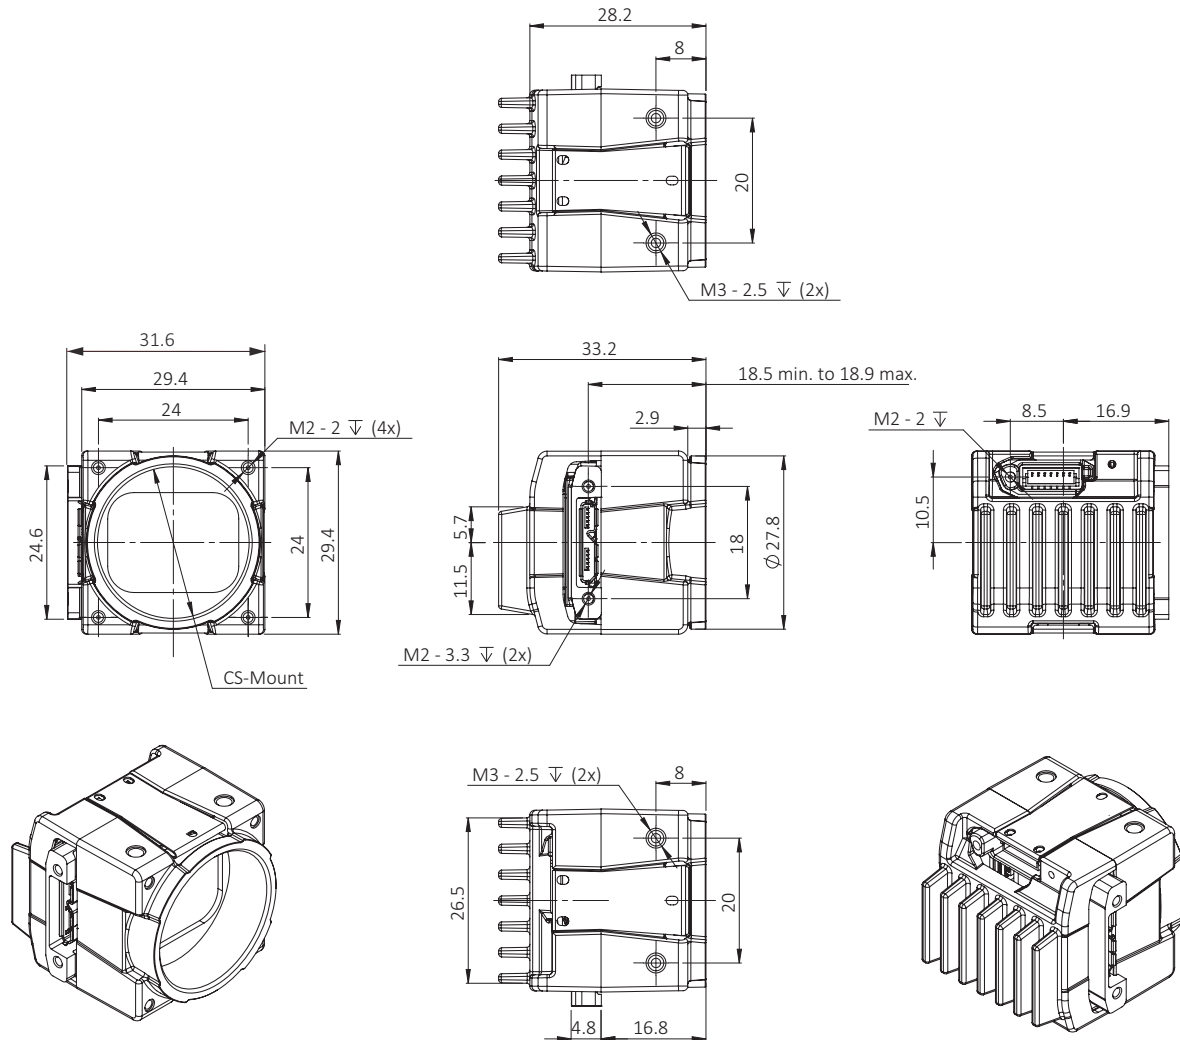


Figure 42: Closed Housing CS-Mount 90° dimensions

Closed Housing C-Mount 90°

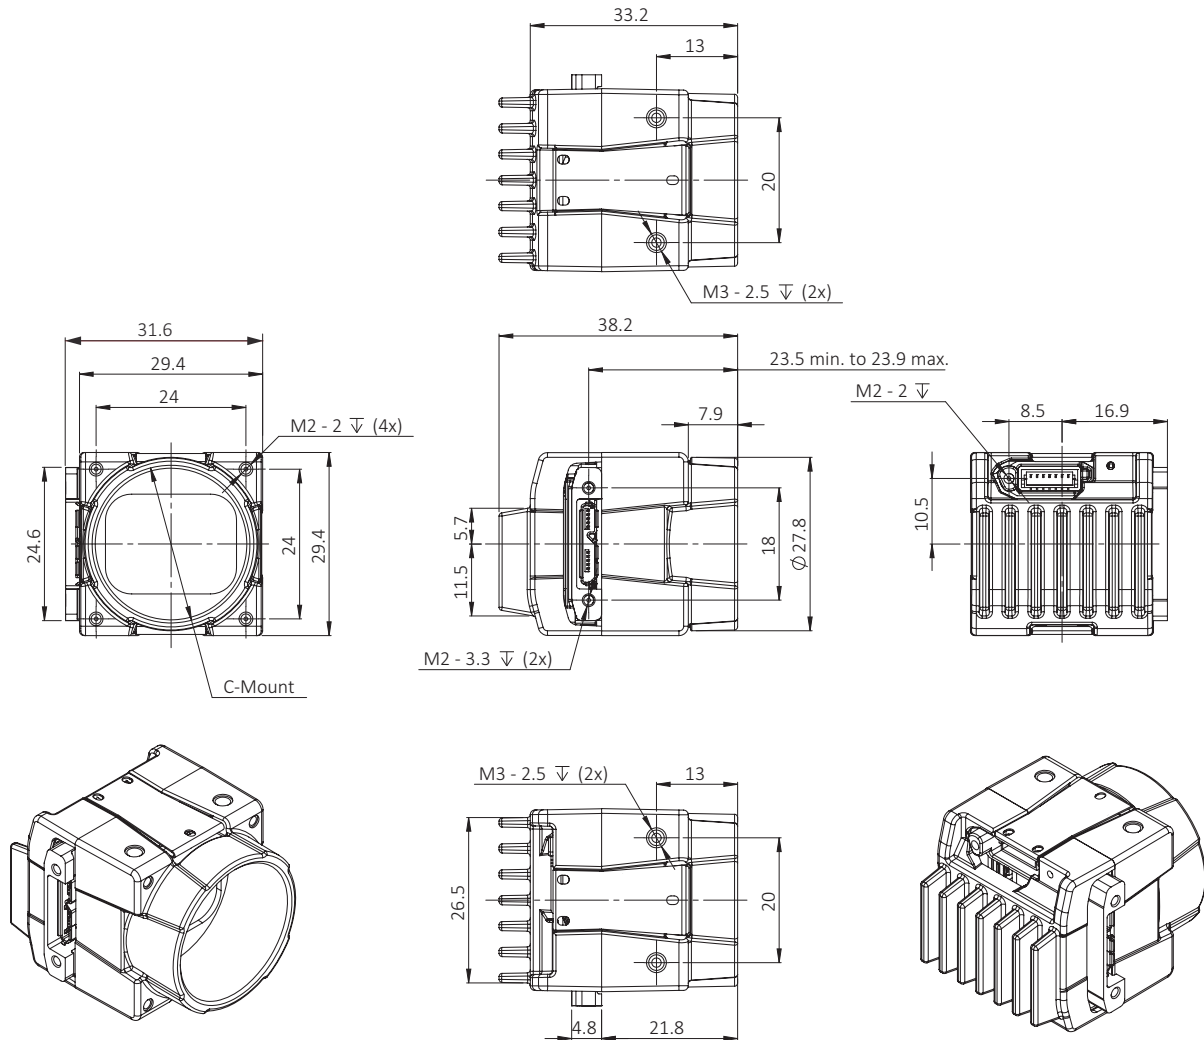



Figure 43: Closed Housing C-Mount 90° dimensions

Lens mounts and maximum protrusion



No need to readjust lens mounts

Alvium USB camera mounts are adjusted with high precision during manufacturing. Construction ensures permanent accuracy without need to readjust.

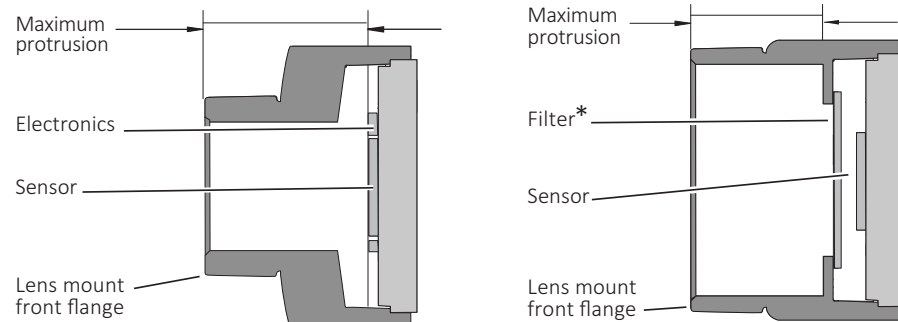

*Only color models are equipped with an IR cut filter

Figure 44: Maximum protrusion S-Mount (left); CS-Mount and C-Mount (right)

Figure 44 shows schematics for maximum protrusion of lenses, Table 57 shows values for maximum protrusion.



NOTICE

Damage to sensor or optics by unsuitable lenses

The sensor, filter, lens, or camera electronics can be damaged if a lens exceeding maximum protrusion is mounted to the camera.

- Use lenses with less than the allowed maximum protrusion, see Table 57.
- See [Mounting the lens](#) on page 148.
- For S-Mount lenses, see [Mounting and focusing S-Mount lenses](#) on page 149.

Mount	Maximum protrusion
S-Mount	11.0 mm
CS-Mount	8.6 mm
C-Mount	13.6 mm

Table 57: Alvium USB cameras maximum protrusion

IR cut filter

Table 58 shows which Alvium models are equipped with an IR cut filter. The filter is permanently installed and cannot be removed.

Color or monochrome model	Bare board	S-Mount	CS-Mount	C-Mount
Color	No filter		Type Hoya C-5000 IR cut filter	
Monochrome	No filter			

Table 58: Optical filter availability

Cameras **without** IR cut filter have a higher sensitivity for low-light imaging. Moreover, spectral sensitivity is increased.

Cameras **with** IR cut filter are more accurate in reproduction of color, contrast, and sharpness, as the filter absorbs near-IR wavelengths. See Figure 45 for filter transmission.



Spectral transmission values

The following curve shows typical transmission for type Hoya C-5000 IR cut filter. Values may vary slightly by filter lot.

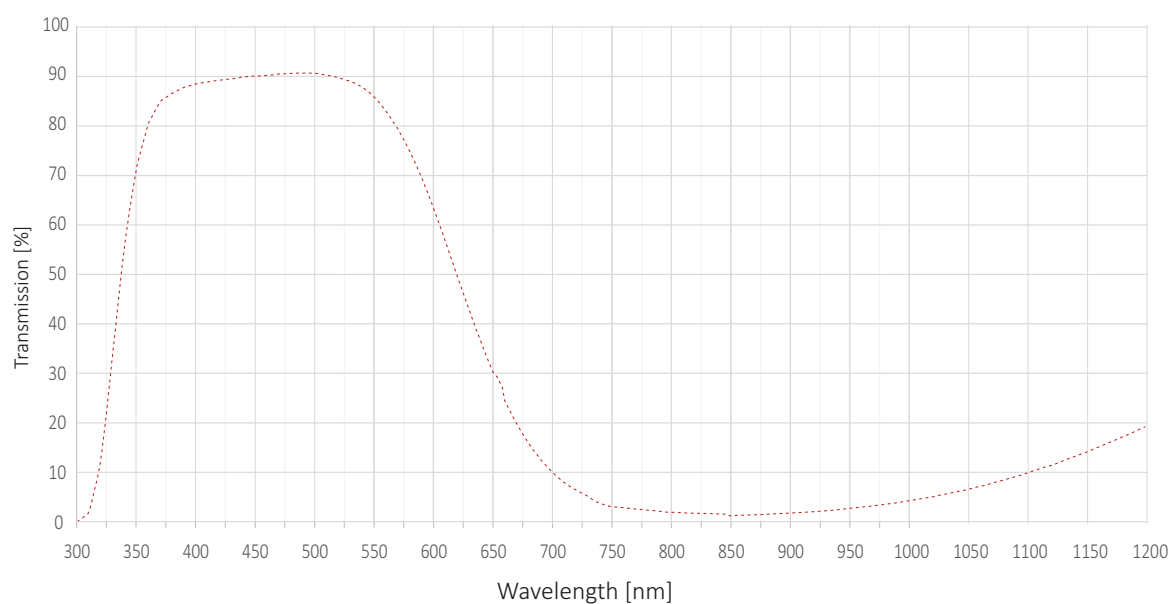


Figure 45: Type Hoya C-5000 IR cut filter spectral transmission




S-Mount lenses with IR cut design

For improved image quality, we recommend using S-Mount lenses that are IR- optimized or that have IR cut coating. See the S-Mount Lenses User Guide at www.alliedvision.com/en/support/technical-documentation/accessory-documentation under Lenses.

Sensor position accuracy

Sensor shift and rotation

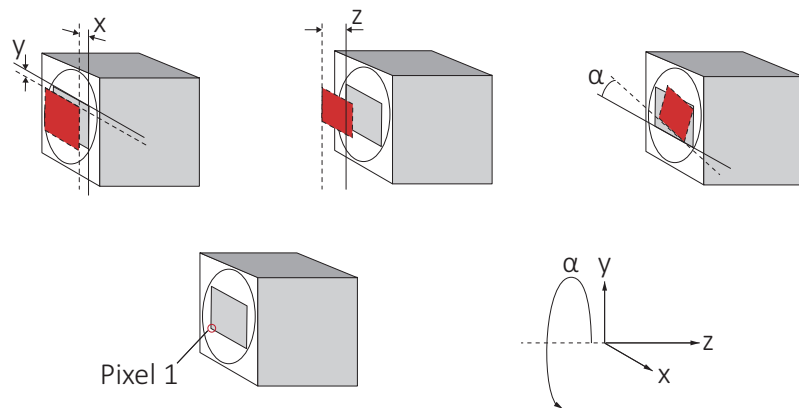

Gray rectangle: Reference sensor position **Red rectangle:** Current position
Straight line: Reference edge **Dotted line:** Current reference edge

The orientation of the z-axis deviates from scientific conventions to define tolerances of the flange focal distance.

Figure 46: Sensor shift and rotation


The following table defines the manufacturing accuracy for sensor shift.

Criteria	Subject	Properties
Alignment method		Optical alignment of the photosensitive sensor area into the camera front module (lens mount front flange)
Reference Points	Sensor	Center of the pixel area (photo sensitive cells)
	Camera	Center of the lens mount
Accuracy	x/y-axis	$\pm 150 \mu\text{m}^1$ (sensor shift)
	z	0 to $-100 \mu\text{m}$ (optical back focal length)
	α	$\pm 0.5 \text{ deg}$ (sensor rotation as the deviation from the parallel to the camera bottom)

¹For Alvium 1800 U-2050 models, the complete offset is $\pm 200 \mu\text{m}$, common tolerances do not have to be added.

Table 59: Alvium USB cameras, criteria of sensor position accuracy

Sensor tilt

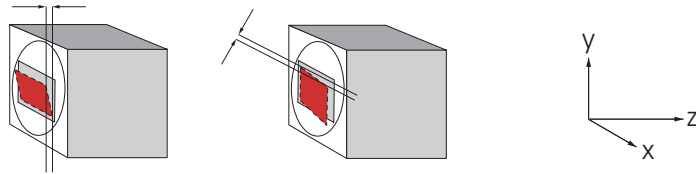

Gray rectangle: Reference sensor position **Red rectangle:** Current position

Figure 47: Sensor tilt

The following table defines sensor tilt as the variance between highest and lowest pixel of a sensor along the z-axis, measured in micrometers.

Alvium model	Pixel size	Maximum tilt
Alvium 1800 U-040m/c	6.9 $\mu\text{m} \times 6.9 \mu\text{m}$	95 μm
Alvium 1800 U-050m/c	4.8 $\mu\text{m} \times 4.8 \mu\text{m}$	47 μm
Alvium 1800 U-120m/c	3.75 $\mu\text{m} \times 3.75 \mu\text{m}$	29 μm
Alvium 1800 U-158m/c	3.45 $\mu\text{m} \times 3.45 \mu\text{m}$	24 μm
Alvium 1800 U-240m/c	3.45 $\mu\text{m} \times 3.45 \mu\text{m}$	24 μm
Alvium 1800 U-319m/c	3.45 $\mu\text{m} \times 3.45 \mu\text{m}$	24 μm
Alvium 1800 U-500m/c	2.2 $\mu\text{m} \times 2.2 \mu\text{m}$	12 μm
Alvium 1800 U-501m NIR	2.2 $\mu\text{m} \times 2.2 \mu\text{m}$	12 μm
Alvium 1800 U-507m/c	3.45 $\mu\text{m} \times 3.45 \mu\text{m}$	24 μm
Alvium 1800 U-508m/c	3.45 $\mu\text{m} \times 3.45 \mu\text{m}$	24 μm
Alvium 1800 U-1236m/c	3.45 $\mu\text{m} \times 3.45 \mu\text{m}$	24 μm
Alvium 1800 U-1240m/c	1.85 $\mu\text{m} \times 1.85 \mu\text{m}$	12 μm
Alvium 1800 U-2050m/c	2.4 $\mu\text{m} \times 2.4 \mu\text{m}$	12 μm

Table 60: Sensor tilt

Lenses: Focal length vs. field of view



This chapter includes:

About this chapter	135
Optical vignetting with certain lenses	135
About S-Mount lenses	136
Focal length vs. field of view	136

About this chapter

This section presents tables that list selected fields of view (FOV) depending on sensor size, distance, and focal length of the lens.

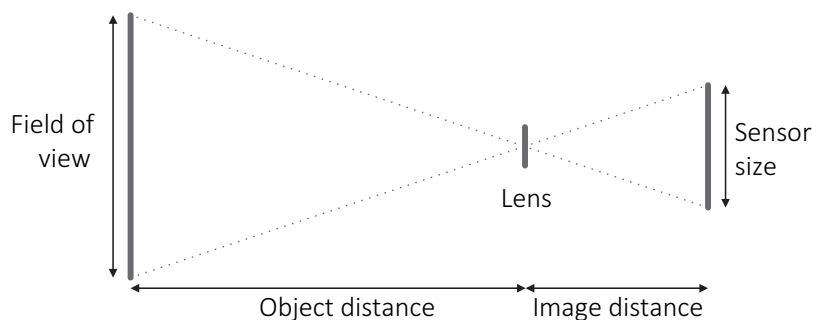


Figure 48: Parameters used in tables for focal length versus FOV



Allied Vision S-Mount lenses

For technical data of Allied Vision S-Mount lenses with dedicated operating instructions, see the S-Mount Lenses User Guide at www.alliedvision.com/en/support/technical-documentation/accessory-documentation under Lenses.

Parameters in tables

The distance to the object is measured from the first principal plane of the lens to the object. For some lenses, manufacturers do not define the principal plane position. Production spread causes tolerances for all values, including actual focal lengths. Calculations apply for image reproduction without distortion. Therefore, values do not apply for fisheye lenses.

Please ask your Allied Vision Sales representative in case you need more information.

Optical vignetting with certain lenses

Lenses with short focal lengths may show optical vignetting at the edges of the image. Microlenses on the sensor pixels can increase the effect.

For demanding applications, we suggest testing camera and lens to find a suitable setup. If you have questions, please contact your Allied Vision Sales representative.

About S-Mount lenses

Alvium S-Mount models have no filter. For typical applications, we recommend using S-Mount lenses with an integrated IR cut filter for a better image quality.

Read [Mounting and focusing S-Mount lenses](#) on page 149 to avoid damage when using S-Mount lenses.

Focal length vs. field of view

Model overview

Model	Type	Page
Alvium 1800 U-040m/c	1/2.9	138
Alvium 1800 U-050m/c	1/3.6	137
Alvium 1800 U-120m/c	1/3	137
Alvium 1800 U-158m/c	1/2.9	138
Alvium 1800 U-240m/c	1/2.3	139
Alvium 1800 U-319m/c	1/1.8	139
Alvium 1800 U-500m/c	1/2.5	138
Alvium 1800 U-501m NIR	1/2.5	138
Alvium 1800 U-507m/c	2/3	140
Alvium 1800 U-508m/c	2/3	140
Alvium 1800 U-1236m/c	1.1	141
Alvium 1800 U-1240m/c	1/1.7	140
Alvium 1800 U-2050m/c	1	141

Table 61: Model overview

Type 1/3.6 (4.9 mm diagonal) sensors

Values apply to **1800 U-050m/c** cameras.

Focal length [mm]	Field of view (H × V [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
2.8	689 × 517	1381 × 1036
3.6	535 × 401	1073 × 805
4.8	400 × 300	804 × 603
6	319 × 239	643 × 482
8	239 × 179	481 × 361
12	158 × 118	319 × 239
16	117 × 88	239 × 179
25	74 × 55	151 × 113

Table 62: Focal length versus field of view (Type 1/3.6 sensor cameras)

Type 1/3 (6 mm diagonal) sensors

Values apply to **1800 U-120m/c** cameras.

Focal length [mm]	Field of view (H × V [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
2.8	852 × 639	1709 × 1282
3.6	662 × 496	1329 × 996
4.8	495 × 371	995 × 746
6	395 × 296	795 × 596
8	295 × 221	595 × 446
12	195 × 146	395 × 296
16	145 × 109	295 × 221
25	91 × 68	187 × 140

Table 63: Focal length versus field of view (Type 1/3 sensor cameras)

Type 1/2.9 (6.3 mm diagonal) sensors

Values apply to **1800 U-040m/c** and **U-158m/c** cameras.

Focal length [mm]	Field of view (H × V [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
2.8	892 × 667	1789 × 1337
3.6	693 × 518	1390 × 1039
4.8	518 × 387	1041 × 778
6	414 × 309	832 × 622
8	309 × 231	623 × 465
12	204 × 153	414 × 309
16	152 × 114	309 × 231
25	95 × 71	196 × 146

Table 64: Focal length versus field of view (Type 1/2.9 sensor cameras)

Type 1/2.5 (7.1 mm diagonal) sensors

Values apply to **1800 U-500m/c** and **1800 U-501NIR** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
2.8	1013 × 759	2031 × 1523
3.6	786 × 590	1578 × 1184
4.8	588 × 441	1182 × 887
6	469 × 352	945 × 709
8	351 × 263	707 × 530
12	232 × 174	469 × 352
16	172 × 129	351 × 263
25	108 × 81	222 × 167

Table 65: Focal length versus field of view (Type 1/2.5 sensor cameras)

Type 1/2.3 (7.9 mm diagonal) sensors

Values apply to **1800 U-240m/c** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
4.8	691 × 433	1389 × 871
6	552 × 346	1110 × 696
8	412 × 258	831 × 521
12	272 × 171	552 × 346
16	203 × 127	412 × 258
25	127 × 80	261 × 164
35	89 × 56	185 × 116
50	60 × 38	127 × 80

Table 66: Focal length versus field of view (Type 1/2.3 sensor cameras)

Type 1/1.8 (8.9 mm diagonal) sensors

Values apply to **1800 U-319m/c** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
4.8	735 × 550	1476 × 1104
6	586 × 439	1180 × 882
8	438 × 328	883 × 661
12	290 × 217	586 × 439
16	215 × 161	438 × 328
25	135 × 101	278 × 208
35	95 × 71	196 × 147
50	64 × 48	135 × 101

Table 67: Focal length versus field of view (Type 1/1.8 sensor cameras)

Type 1/1.7 (9.33 mm diagonal) sensors

Values apply to **1800 U-1240m/c** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
4.8	763 × 578	1534 × 1161
6	609 × 461	1226 × 928
8	455 × 344	918 × 694
12	301 × 228	609 × 461
16	224 × 169	455 × 344
25	141 × 106	289 × 218
35	98 × 74	204 × 154
50	67 × 50	141 × 106

Table 68: Focal length versus field of view (Type 1/1.7 sensor cameras)

Type 2/3 (11.1 mm diagonal) sensors

Values apply to **1800 U-507m/c** and **1800 U-508m/c** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
6	700 × 584	1408 × 1175
8	523 × 436	1054 × 880
12	346 × 288	700 × 584
16	257 × 215	523 × 436
25	162 × 135	332 × 277
35	113 × 94	234 × 196
50	77 × 64	162 × 135

Table 69: Focal length versus field of view (Type 2/3 sensor cameras)

Type 1 (15.86 mm diagonal) sensors

Values apply to **1800 U-2050m/c** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
8	811 × 542	1636 × 1093
12	536 × 358	1086 × 726
16	399 × 267	811 × 542
25	251 × 167	514 × 344
35	175 × 117	364 × 243
50	119 × 79	251 × 167
75	75 × 50	163 × 109
85	64 × 43	142 × 95
100	53 × 35	119 × 79

Table 70: Focal length versus field of view (Type 1 sensor cameras)

Type 1.1 (17.6 mm diagonal) sensors

Values apply to **1800 U-1236m/c** cameras.

Focal length [mm]	Field of view (H × V in [mm])	
	Object distance = 500 mm	Object distance = 1000 mm
8	872 × 638	1759 × 1287
12	577 × 422	1168 × 854
16	429 × 314	872 × 638
25	270 × 197	553 × 405
35	188 × 138	391 × 286
50	128 × 93	270 × 197
75	80 × 59	175 × 128

Table 71: Focal length versus field of view (Type 1.1 sensor cameras)

Installing the camera



This chapter includes:

Touching hot cameras	143
Bare board cameras	143
Mounting the heat sink.....	145
Mounting the camera	146
Mounting the lens.....	148
Software and driver installation on the host	152

Touching hot cameras



CAUTION

Risk of burns

A camera in operation can reach temperature levels which could cause burns.

- Wear protective gloves when you touch a camera that is heated up.
- Ensure proper cooling of the camera.

Bare board cameras

If you intend to design an application using bare board cameras, please consider:

- Aligning the sensor to the lens is extremely difficult and expensive. Therefore, we recommend you to do evaluation with housed cameras first.
- Bare board cameras are specialized components. We cannot give all data needed for any application in advance.
- Please let us partner with you for bare board camera applications to ensure a successful design.

Serial numbers of Alvium® chips and bare board cameras

Bare board cameras do not have enough space for a label with all the required information. Therefore, they are shipped with a 25 mm × 25 mm sandwich label on the blister pack. This label shows, for example:

- Product code: 14767 for a 1800 U-240c Bare Board 90° camera
- Alvium® chip SN (serial number): 183603543
- Camera SN (serial number): R7QW5 as digits and 2D code.

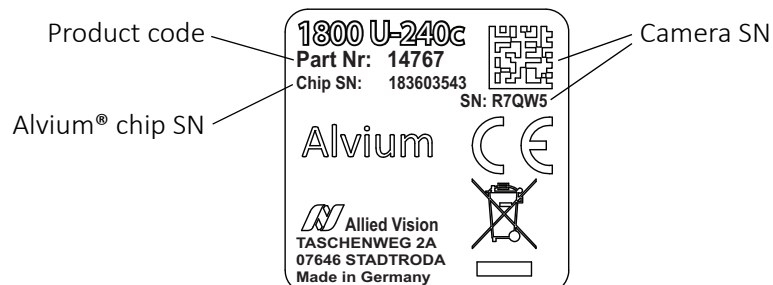


Figure 49: Sandwich label on blister packs shipped for bare board cameras

Before operating the camera, we recommend you to pull the sandwich label off the blister pack and stick it close to the camera.

If the label is lost, please read out with your smart phone the serial number of the Alvium® chip from the 2D code (a). With this number, we can look up the serial number of the camera in our database.

If your smart phone cannot read the 2D code: Combine the four digits (b) with the five digits (c). In the example, the serial number is 183603543.

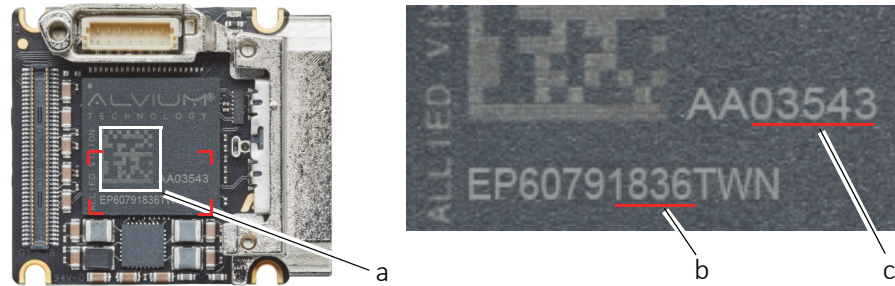


Figure 50: Alvium® chip imprint with detail view (right)

Future bare board cameras follow the convention shown in Figure 51. String (d) is the serial number, in the example, it is 205203543.

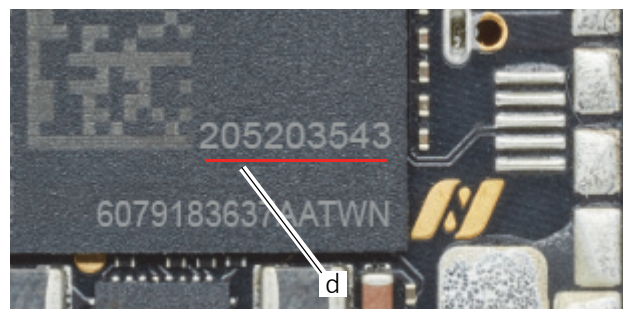


Figure 51: Alvium® chip imprint version 2

Mounting the heat sink

Keep the operating temperature in the specified range to enable best image quality and to protect the camera from damage. We recommend you to equip Alvium bare board and open housing cameras with heat sinks.



Optimizing heat dissipation

For details, see the Optimum Heat Dissipation for Housed Alvium Cameras application note at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.



NOTICE

Damage to the camera by heat sinks mounted improperly

- Allow mechanical contact only at the cooling areas.
- Avoid any mechanical stress to the sensor and electronics area.
- Avoid short circuits of the electronics components.



NOTICE

Damage to the sensor, filter, and lens by corrosive substances

Some conductive media for heat sinks contain corrosive substances that can damage optical surfaces of the sensor, filter, and lens.

- Cover the optical path of the camera when you apply heat sink compound or adhesive to prevent substances and fumes from damaging optical surfaces.
- Adhere to the instructions and safety notes provided by the manufacturer of the conductive media.



NOTICE

Damage to camera electronics

Heat sinks can cause short circuits if they are not electrically isolated.

Avoid electrical contact between electronic components by unsuitable heat sinks and thermal conductive media.

Connect components in the cooling areas (blue areas in [Figure 52](#)) to a heat sink, following the instructions of the manufacturer of the heat sink and the thermal conductive media. Cooling areas for Alvium USB 90° models are the same as for standard models.

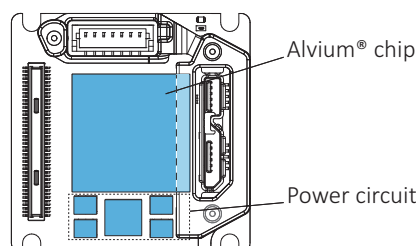


Figure 52: Cooling areas for Alvium USB bare board cameras

Mounting the camera



CAUTION

Injury by falling cameras or lenses

A falling camera or lens can cause injury.

- Ensure proper mounting of cameras and lenses, especially for dynamic applications.
- Mount cameras as described in the instructions.
- Use a lens support for heavy lenses.

Mounting bare board cameras



Heat dissipation and electromagnetic compatibility for bare board cameras

For heat dissipation, see the Optimum Heat Dissipation for Housed Alvium Cameras application note.

For electromagnetic compatibility, see the Electromagnetic Compatibility for Open Housing Alvium Cameras application note.

See www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.



NOTICE

Damage to the camera by improper mounting

- Allow mechanical contact only at the mounting area.
- Avoid any mechanical stress to the sensor and the electronics area.
- Avoid short circuits of the electronics components.
- Give 2 mm minimum clearance above board components.
- Tighten screws at 0.1 Nm maximum torque.

Schematic drawings in [Figure](#) show Alvium USB bare board cameras. Only the mounting area (gray) can be used for mounting. The sensor and electronics area (red) must not be touched nor put at mechanical stress.

a = Mounting hole | b = Mounting hole and chassis ground

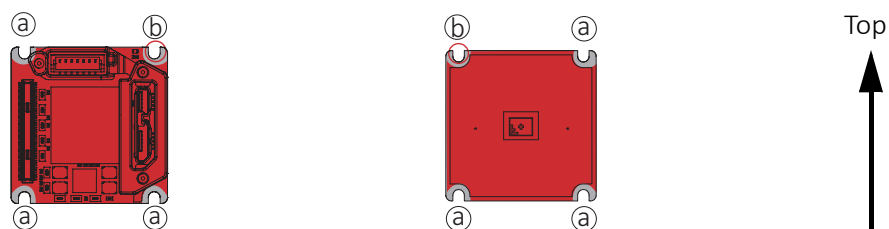


Figure 53: Mounting area of Alvium USB bare board cameras
connector side (left); sensor side (right)

Mount the bare board with four M2 screws at 0.1 Nm maximum torque.
Mounting areas for Alvium USB 90° models are the same as for standard models.

Mounting housed cameras

Bottom or top mounting

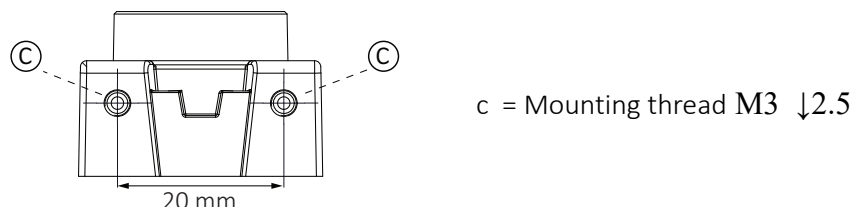


Figure 54: Top and bottom with mounting threads

1. Mount the camera to the base using suitable M3 screws at 0.35 Nm maximum torque for a thread engagement of 2.5 mm between screws and mounting threads, see Figure 54. For technical drawings, see [Dimensions and mass](#) on page 112.
2. Continue with [Mounting the lens](#) on page 148.

Front mounting

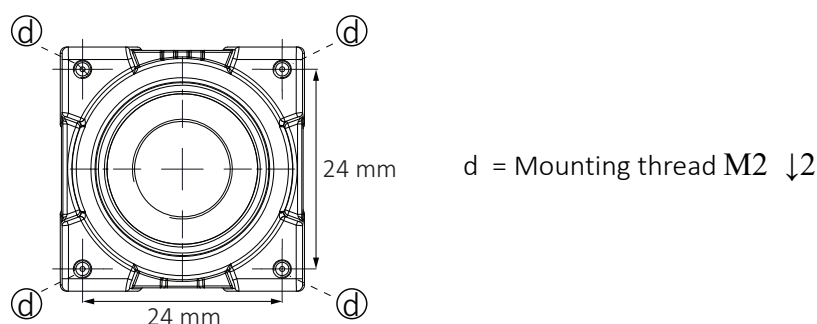


Figure 55: Camera front with mounting threads

1. Mount the camera to the base using suitable M2 screws at 0.18 Nm maximum torque for a thread engagement of 2 mm between screws and mounting threads, see Figure 55. For technical drawings, see [Dimensions and mass](#) on page 112.
We recommend you to additionally use bottom and top mounting threads for a more solid connection.
2. Continue with [Mounting the lens](#) on page 148.



Tripod adapter

For more information, see the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Mounting the lens

Observe the following notes before you mount lenses to Alvium USB cameras.



CAUTION

Injury by falling cameras or lenses

A falling camera or lens can cause injury.

- Ensure proper mounting of cameras and lenses, especially for dynamic applications.
- Mount cameras as described in the instructions.
- Use a lens support for heavy lenses.



CAUTION

Risk of cuts by sharp edges of lens mounts

The threads of the lens mount can have sharp edges.

Be careful when mounting or unmounting lenses.



NOTICE

Damage to sensor, optics, or electronics by unsuitable lenses

The sensor, filter, lens, or electronics can be damaged if a lens exceeding maximum protrusion is mounted to the camera.

- Use lenses only up to the specified maximum protrusion, see [Lens mounts and maximum protrusion](#) on page 130.
- S-Mount lenses must be screwed into the camera at less than maximum protrusion (11.0 mm), see [Mounting and focusing S-Mount lenses](#) on page 149.
- Avoid short S-Mount lenses falling into the camera.

Mounting and focusing S-Mount lenses



Allied Vision S-Mount lenses

For technical data of Allied Vision S-Mount lenses with dedicated operating instructions, see the S-Mount Lenses User Guide at www.alliedvision.com/en/support/technical-documentation/accessory-documentation under Lenses.

This section instructs how to use S-Mount lenses with your camera safely. S-Mount lenses are screwed into the mount to adjust focus. Vibration moves lenses out of position. Several techniques can be used to fasten S-Mount lenses in focus. We recommend using fixing nuts. See instructions in this section.



Drawings and fixing nuts

Drawings in the instructions are schematic.

Several manufacturers offer various types of S-Mount fixing nuts. The type shown in the instructions drawings is an example.

We recommend using pinch nose pliers to tighten fixing nuts.

Figure 56 shows how fixing nuts lock S-Mount lenses. Follow the instructions to lock the lens in focus position.




Figure 56: Fixing nut locking an S-Mount lens



NOTICE

Damage to sensor, optics, or electronics by improper handling

If an S-Mount lens is screwed against the sensor or electronics, sensor, lens, or electronics can be damaged.

- Screw in the lens at less than 11.0 mm maximum protrusion.
- Follow the instructions carefully.

Determining the allowed range for the position of the lens

1. Measure the length of the lens.
2. Calculate: $a = c - b$
a: length of the mounted lens, measured from lens mount front flange
b: maximum protrusion (11.0 mm)
c: length of the lens

See [Lens mounts and maximum protrusion](#) on page 130.

3. Set a gauge to the length of (a).

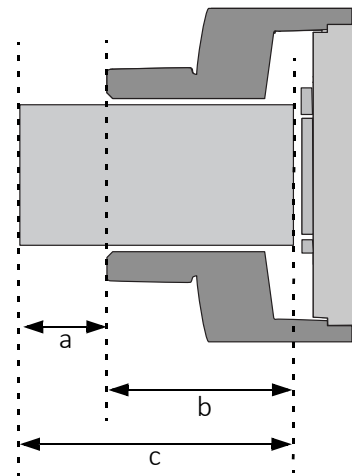


Figure 57: S-Mount lens and maximum protrusion

Mounting the fixing nut to the lens

4. Screw the fixing nut clockwise onto the lens until you can hold the front part (d) of the lens with your finger tips.




Figure 58: Lens and fixing nut

Focusing the lens

5. **Checking (a) with a gauge**, slowly screw the lens clockwise into the lens mount until the image is roughly in focus.
6. Slowly screw in and unscrew the lens until you have found the most accurate focus.




Figure 59: Adjusting focus

**NOTICE****Damage to lens threads and fixing nut by excessive force**

If the fixing nut is screwed with too much force, threads are worn out and the lens cannot be locked anymore.

Screw fixing nuts hand tight to keep the lens in a fixed position.

Locking focus

Pinch nose pliers are used to screw the fixing nut:

7. Holding the lens in position with one hand, screw the fixing nut clockwise against the lens mount until you feel the lens is locked.




Figure 60: Tightening the fixing nut

Checking focus is set and locked properly

8. Check No.1: Try to rotate the lens with little force in both directions to ensure the lens is safely locked in position.




Figure 61: Checking lens is safely locked

9. Check No. 2: S-Mount thread allows a slightly tilted lens position. In this case, focus for a common object plane varies over the image plane.

If focus is constant over the image plane, you are done.

If focus varies over the image plane, the lens is tilted. Continue with 10.

10. Loosen the fixing nut.

11. Continue with 6.

The lens is locked in focus and ready for operation.

Software and driver installation on the host



Easy camera access with Vimba

This section lists general requirements to operate Alvium USB cameras on your system.

To download **Vimba Suite** for Windows, Linux, and Linux/ARM, including **Vimba SDK**, **Vimba Viewer**, and **Vimba Driver Installer** for Windows, see www.alliedvision.com/software.

For more details see **ReleaseNotes_Linux.txt** or **ReleaseNotes_Windows.txt** in the directory of your **Vimba** installation, or see www.alliedvision.com/software.

Required components



Driver installation and OS support

Windows: Please use **Vimba** to install the camera driver. For **Vimba** system requirements and supported Windows versions, see www.alliedvision.com/software.

Linux: Allied Vision does not provide a special driver. For **Vimba** system requirements and supported operating systems, see www.alliedvision.com/software.

You need the following accessories:

- USB 3.0 or 3.1 Gen 1 external host controller card or on-board host controller
- USB 3.0 or 3.1 Type-A to Micro-B cable.



Compatible USB 3.0 or 3.1 Gen 1 accessories

See the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Installing the camera driver using Vimba on a Windows system

Instructions in this chapter describe installation of the camera driver using **Vimba** on a Windows system. On Linux systems, the generic driver for USB3 Vision devices is used.



Unexpected events

Should installation or operation not work properly, see [Performance and troubleshooting](#) on page 171.

Using the camera with third-party drivers

Alvium USB cameras may not support third-party drivers. We recommend using the **Vimba** camera driver.

Installing drivers for camera and host adapter

Installing the host adapter and Vimba

1. Install the USB 3.0 or 3.1 Gen 1 host controller card and driver according to the manufacturer's instructions.
2. Download and install **Vimba**:
www.alliedvision.com/software.
3. Continue with [Installing the camera driver](#).

Installing the camera driver



Connecting the camera to a USB 2.0 port

If the Alvium USB camera is connected to a USB 2.0 port, the **Vimba** driver can be installed and the camera can be configured and operated. But for full performance, the camera must be connected to a USB 3.0 or 3.1 Gen 1 port.



Command line driver installer

Vimba also provides a command line driver installer. For more information about the **Vimba Driver Installer**, see the Vimba Manual, included in the **Vimba** download.

During the **Vimba** installation, select at least **Camera Demonstration** and **Vimba Applications** to operate Alvium USB cameras. If the camera is not recognized or to subsequently change an assigned driver, follow the instructions:

1. Connect your Alvium USB camera to the computer using a USB 3.0 or 3.1 Type-A to Micro-B cable.
2. Start **Vimba Driver Installer** and open the **USB3 Vision Cameras** tab. The **Driver Source** is not installed, yet. If other USB3 Vision devices are installed, another USB3 Vision driver may be assigned to your camera.
3. Click the Alvium USB camera entry. The current **Vimba** driver is offered as a popup (Vimba 3.0.0 in the example).

4. Open **Install driver > USB3 Vision Camera** and click the driver popup.

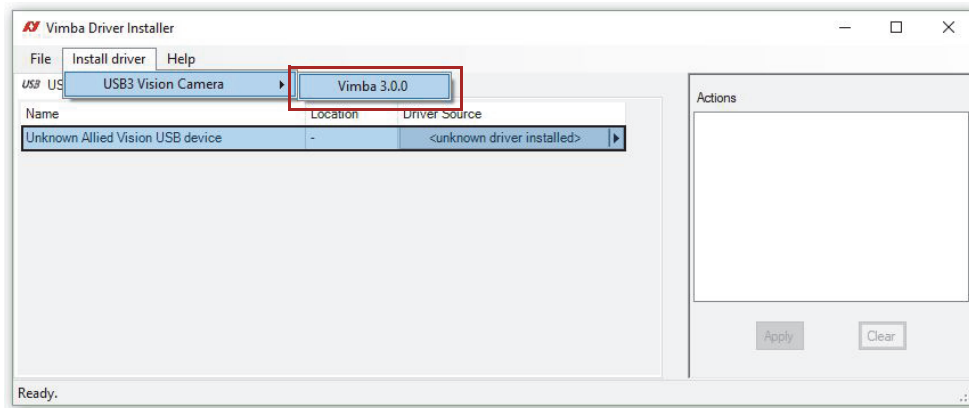


Figure 62: Vimba Driver Installer, camera driver not installed

5. Click **Apply** to install the **Vimba** driver for the camera.

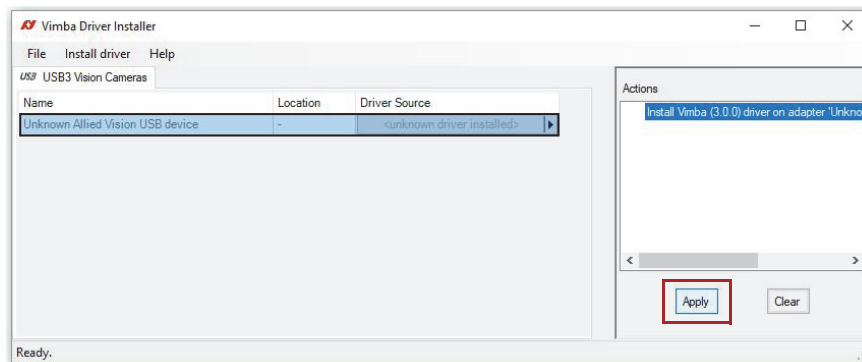


Figure 63: Vimba Driver Installer, driver installation started

The driver has been installed successfully, the camera is recognized.

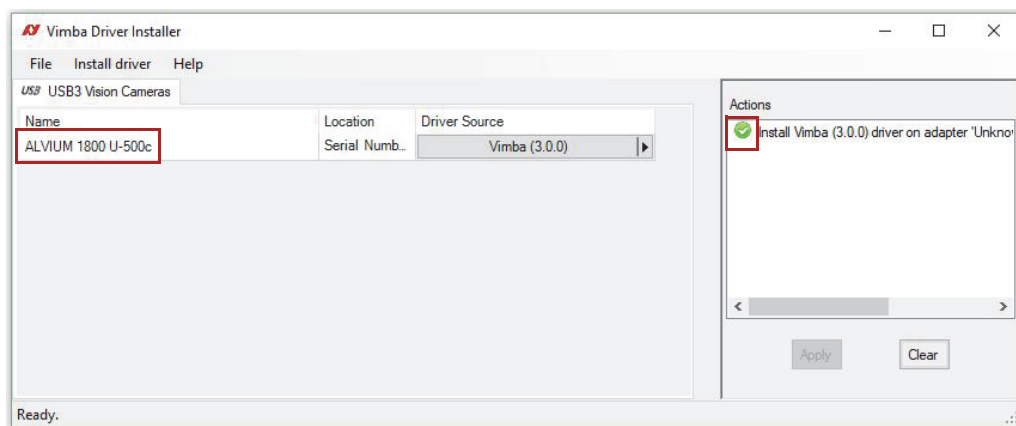


Figure 64: Vimba Driver Installer, driver installed successfully



Manual Vimba Driver installation

Windows: For manual **Vimba** driver installation, see the following instructions.

Installing the camera driver with Windows tools

As an alternative practice, you can install the **Vimba** driver manually. Check for connected USB devices on your Windows system.



Screenshots are examples

The following screenshots were taken on a test system. The view may be different, depending on the configuration of your system.

Under Windows, the **Device Manager** provides an overview of USB resources and connected devices. As long as the **Vimba** USB device driver is not installed, the camera is not recognized.

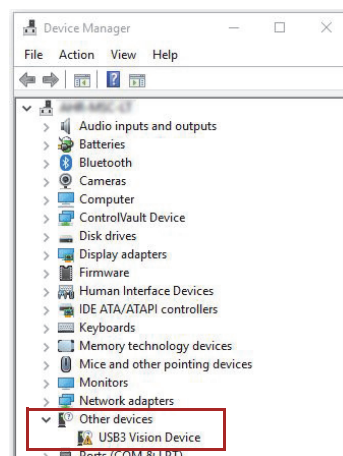


Figure 65: Windows Device Manager, unrecognized USB3 Vision camera

If no **USB3 Vision Device** is shown under the section **Other devices**, continue with action step 1. Otherwise, continue with action step 3.

1. Look at the section **Universal Serial Bus controllers**.
2. Disable the new found **USB Composite Device** and enable it again.
This creates the entry under the section **Other Devices** as shown in [Figure 65](#).

3. Right-click the unrecognized **USB3 Vision Device** and select *Update driver*.

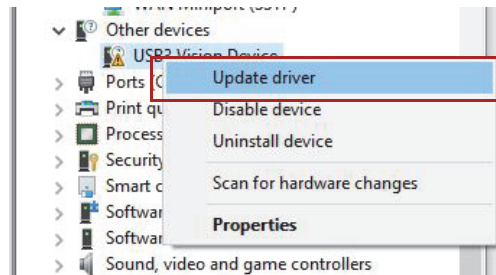


Figure 66: Windows Device Manager, Windows Driver Installer

4. Click: “Browse my computer for driver software”.
5. Select [Your local Vimba directory]\Allied Vision\Vimba_V.x.x\VimbaUSBTL\Driver.
6. Follow the instructions.

The camera driver is installed successfully.


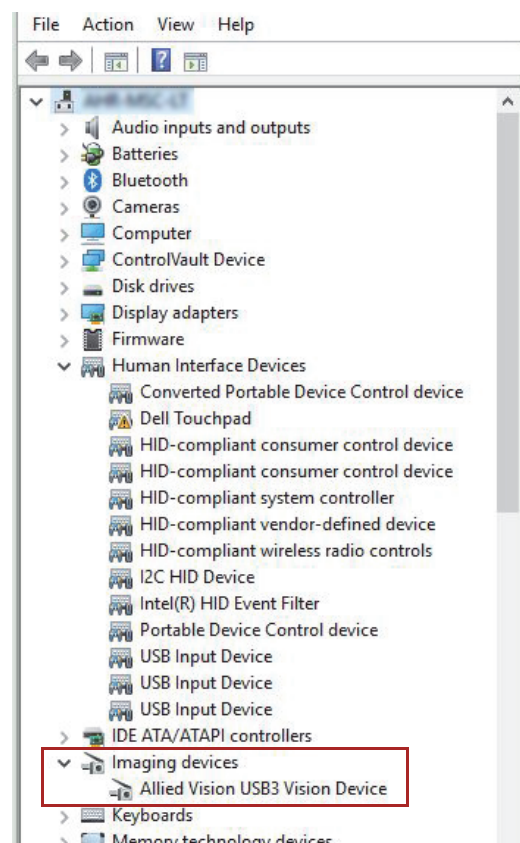


Figure 67: Windows Device Manager, USB3 Vision camera installed successfully

Camera interfaces



This chapter includes:

Recommended accessories	158
Back panel	158
I/O connector pin assignment	158
Non-isolated, programmable GPIOs	160
Status LED.....	162

Recommended accessories



Compatible electronics accessories

See the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Back panel

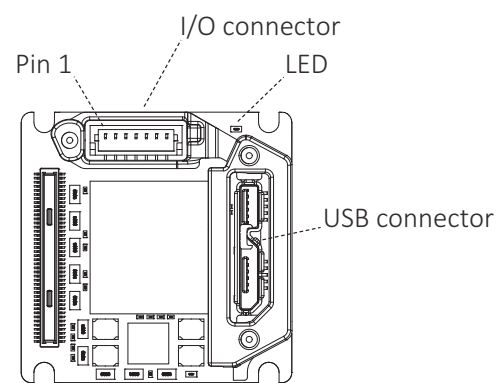


Figure 68: Bare board camera

Interface descriptions

Interface	Section in this user guide
I/O connector	Non-isolated, programmable GPIOs on page 160
Status LED	Status LED on page 162

Table 72: Interface descriptions overview

I/O connector pin assignment



I/O connector details

JST BM07B-SRSS-TBT connector set consists of:

- Camera connector: JST BM07B-SRSS-TBT
- Cable housing: JST SHR-07V-S
- Cable, crimp contacts: JST SSH-003T-P0.2-H

See www.jst.de for details.



I/O cables and electromagnetic interference (EMI)

Consider for I/O cables by Allied Vision:

- 12319 JST I/O cables without screw lock have no shielding and are designed to be used with bare board or open housing Alvium cameras.
- For applications without an additional EMC housing, use shielded cables, such as 12322 JST I/O cables **with screw lock**.



NOTICE

Damage by reverse polarity

If Alvium USB cameras are externally powered with reverse polarity, the cameras can be damaged.

Power Alvium USB cameras according to the specifications described in this section.

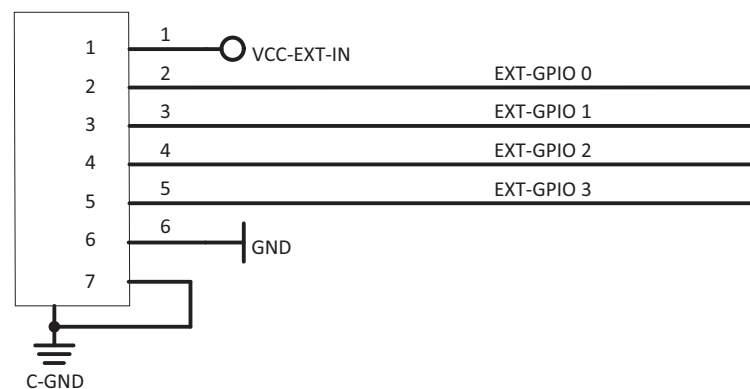


Figure 69: Pin assignment of JST BM07B-SRSS-TBT type I/O connector

Pin	Signal	Direction	Level	Description
1	VCC-EXT-IN	PWR IN	4.5 to 5.5 VDC	Power supply voltage See Camera power on page 38.
2	EXT-GPIO 0	IN/OUT	$U_{in} \text{ (low)} = -0.3 \text{ to } 0.8 \text{ VDC}$ $U_{in} \text{ (high)} = 2.0 \text{ to } 5.5 \text{ VDC}$ $U_{out} \text{ (low)} = 0 \text{ to } 0.4 \text{ VDC}$ $U_{out} \text{ (high)} = 2.4 \text{ to } 3.3 \text{ VDC at max. } 12 \text{ mA}$	GPIOs Internal pull-up resistor: 33 kΩ to 63 kΩ
3	EXT-GPIO 1	IN/OUT	See Pin 2, EXT-GPIO 0	
4	EXT-GPIO 2	IN/OUT	See Pin 2, EXT-GPIO 0	
5	EXT-GPIO 3	IN/OUT	See Pin 2, EXT-GPIO 0	
6	GND	PWR	0 VDC	Power supply ground
7	C-GND	PWR	0 VDC	Chassis ground and shielding

Table 73: Pin assignment of the JST BM07B-SRSS-TBT type I/O connector

Non-isolated, programmable GPIOs



I/O cables maximum length

The maximum length for I/O cables must not exceed 30 meters.

GPIOs description

The camera has four non-isolated GPIOs that can be configured by software to act as inputs or outputs.

Alvium GPIOs use the push-pull technology to switch the signal level between low and high. For low levels, the signal is "pulled" down towards ground level. For high levels, the signal is "pushed" up towards VCC level.

Alvium GPIOs feature the CMOS push-pull output drivers and Schmitt trigger inputs with an internal pull-up resistor and a filter circuit, shown in [Figure 70](#). The push-pull GPIOs are able to source or sink current from an external pin.

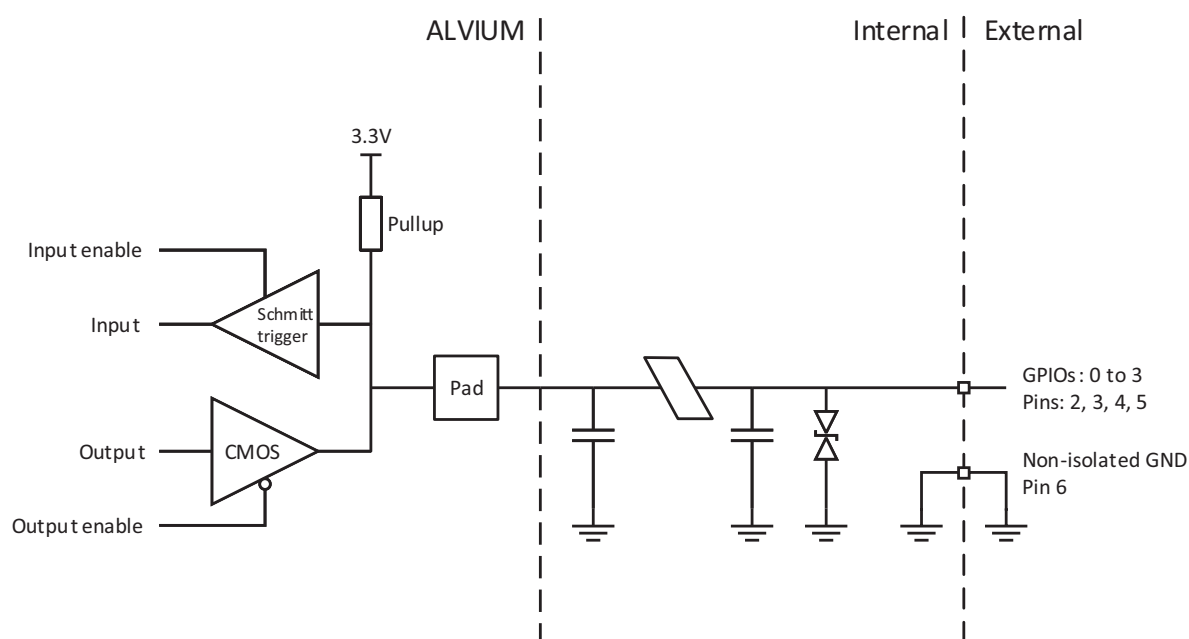


Figure 70: GPIOs block diagram

Input levels

The GPIOs can be connected directly to the system controlling the camera for voltages up to 5.5 VDC. An external resistor is not necessary.



NOTICE

Damage to the camera by high input voltage

Exceeding maximum input voltage can damage the camera.
Keep maximum input voltage below 5.5 VDC.

Parameter	Value
U_{in} (low)	-0.3 to 0.8 VDC
U_{in} (high)	2.0 to 5.5 VDC
Undefined levels	0.8 to 2.0 VDC

Table 74: GPIOs as input, voltage levels

Output levels



NOTICE

Damage to the camera by high output current or voltage

The camera can be damaged when connected to a device that exceeds the specified maximum current or voltage. Consider maximum values:

- Maximum current = 12 mA per output
- Maximum Out VCC = 3.3 VDC

Parameter	Value
External output voltage U_{out} (low)	0 to 0.4 VDC
External output voltage U_{out} (high)	2.4 to 3.3 VDC
Undefined levels	0.4 to 2.4 VDC
Maximum external output voltage	3.3 VDC
Maximum output current	12 mA

Table 75: GPIOs as output, current and voltage levels



Output voltage for U_{out} (high) = On state

The voltage level in the On state depends on the load current. Higher currents yield lower voltage.

Status LED

Alvium USB cameras have a green status LED. The following table describes the flashing pattern indicating different events. Inverse flashing: If the LED is already on, it is switched off for a short time.



LED settings

You can define LED settings with the **DeviceIndicatorLuminance** feature:

- A value of *10* enables LED signaling at the highest luminance level.
- Values below *10* reduce the luminance level.
- *0* disables LED signaling.

Normal operation




LED codes	Behavior	Status
	Continuously active	Power on or idle state
	Irregular flashing	Command or image traffic, such as for camera startup
	Four short flashes and code sequence	Error state

Table 76: LED codes for normal operation

Error conditions

Four short flashes followed by another sequence indicate errors. In this case, try the following to get the camera back to normal operation:

1. Restart the camera.
2. If the LED indicates error state again, please contact support@alliedvision.com.

Triggering



This chapter includes:

Trigger signal flow	164
Trigger latency	165
Trigger features and UserSetDefault	165
Triggering with rolling shutter cameras	165

Trigger signal flow

Figure 71 shows an ideal diagram for the trigger signal flow. The external signal can be a physical source, such as light barrier as hardware trigger or a software trigger. This external signal starts the exposure of a frame. The end of exposure starts the readout. High levels show the active state of a signal.



Features availability

States shown in the following graphic apply to Alvium USB cameras. Not all of the corresponding features may be supported. See the Alvium Cameras Features Reference at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation for details.

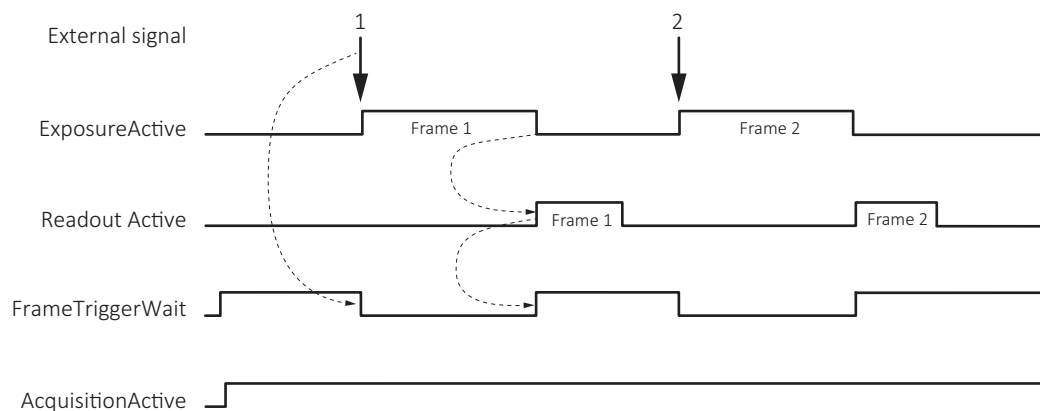


Figure 71: Schematic trigger signal flow

Term	Description
External signal	Electrical trigger signal starting the signal flow
<i>ExposureActive</i>	Exposing a frame
Readout Active	Reading out a frame (logical state, not a user feature)
<i>FrameTriggerWait</i>	Waiting for a trigger
<i>AcquisitionActive</i>	Enables frame acquisition: Expose, read out data, or wait for triggers.

Table 77: Trigger signal flow terms

Trigger latency

In theory, a trigger creates a camera response at split seconds, depending on the cable length. In practice, the computer may add a delay that is mostly unpredictable, especially on Windows systems. In addition, camera electronics and sensors have a delay.

Rolling shutter (RS) cameras in this document also have exposure delay, depending on camera settings, see [Triggering with rolling shutter cameras](#) on page 165.

Trigger features and UserSetDefault

Trigger features are reset to default values when the default user set is loaded.

- Column **UserSetLoad** displays how user values are affected when the command for **UserSetLoad** is executed.
- Column **DeviceReset** displays how user values are affected when the command for **DeviceReset** is executed.

Feature	Default value	UserSetDefault	DeviceReset
TriggerActivation	<i>RisingEdge</i>	Default value	Default value
TriggerMode	<i>Off</i>	Default value	Default value
TriggerSelector	<i>AcquisitionStart</i>	User value	Default value
TriggerSoftware	[Command]	Not applicable	Not applicable
TriggerSource	<i>Software</i>	Default value	Default value

Table 78: Trigger features being reset

Triggering with rolling shutter cameras

This section describes triggering behavior for **1800 U-500m/c, U-501m NIR, U-1240m/c, and U-2050m/c**. [Figure 72](#) shows how an external signal triggers exposure and readout for cameras with rolling shutter (RS) sensors. Like for global shutter (GS) sensors, readout has a constant duration, acquisition must be active to enable exposure, the end of exposure starts readout.

Rolling shutter (RS) sensors run in cycles where [readout area](#) equals [exposure area](#). Overlapping triggering is not supported. If exposure time is shorter than readout time, exposure starts with a delay:

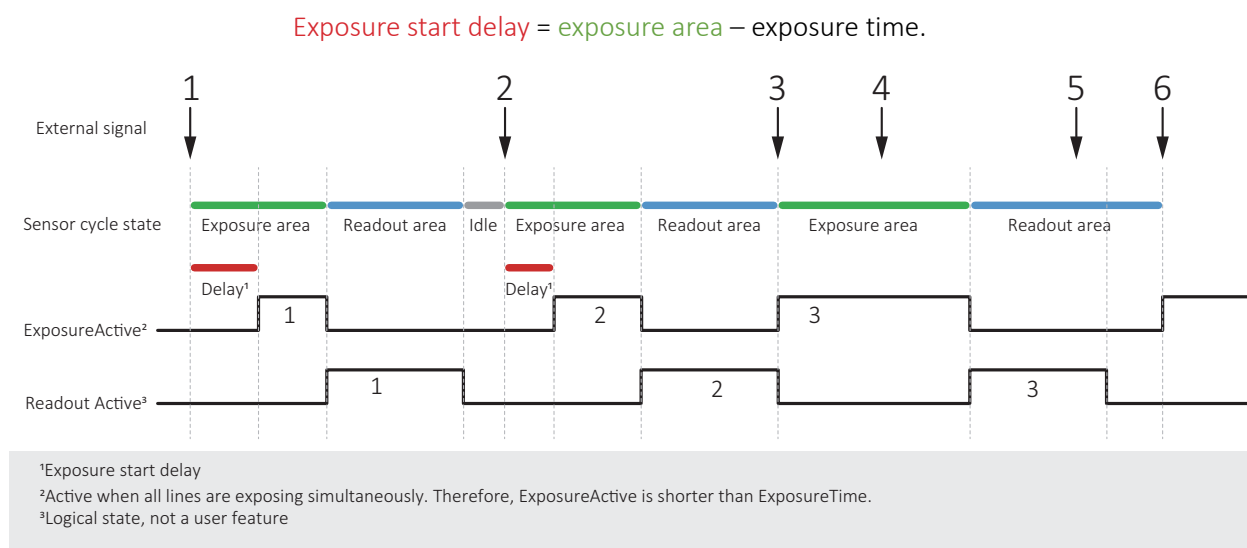


Figure 72: Triggering rolling shutter (RS) cameras

No	Conditions	Results
1	Exposure time is shorter than readout time.	Trigger 1 starts exposure 1 with a delay
2	Exposure time is shorter than readout time, but longer than for exposure 1.	Trigger 2 starts exposure 2 with a delay shorter than for exposure 1.
3	Exposure time is longer than readout time	Trigger 3 starts exposure time without a delay. Because the exposure area is longer, also the readout area is longer than for triggers 1 and 2
4	Exposure area is ongoing.	Trigger 4 is ignored.
5	Readout area is ongoing	Trigger 5 is ignored.
6	Readout area is finished. Exposure time is longer than readout time.	Trigger 6 starts exposure 6 without a delay

Table 79: Triggering conditions and results



TriggerSelector values for rolling shutter (RS) cameras

Cameras with rolling shutter (RS) **can** be triggered using *AcquisitionStart*, *AcquisitionEnd*, or *FrameStart* for TriggerSelector.

Cameras with rolling shutter (RS) **cannot** be triggered using *ExposureStart* or *ExposureEnd* for TriggerSelector.



Frame rates in triggered mode


When rolling shutter cameras are operated in triggered mode, the values for maximum frame rate reached in free run mode are cut in half.

Image data flow



This chapter includes the image data flow for Alvium USB cameras.

Figure 73 shows image data processing for Alvium USB cameras in general.

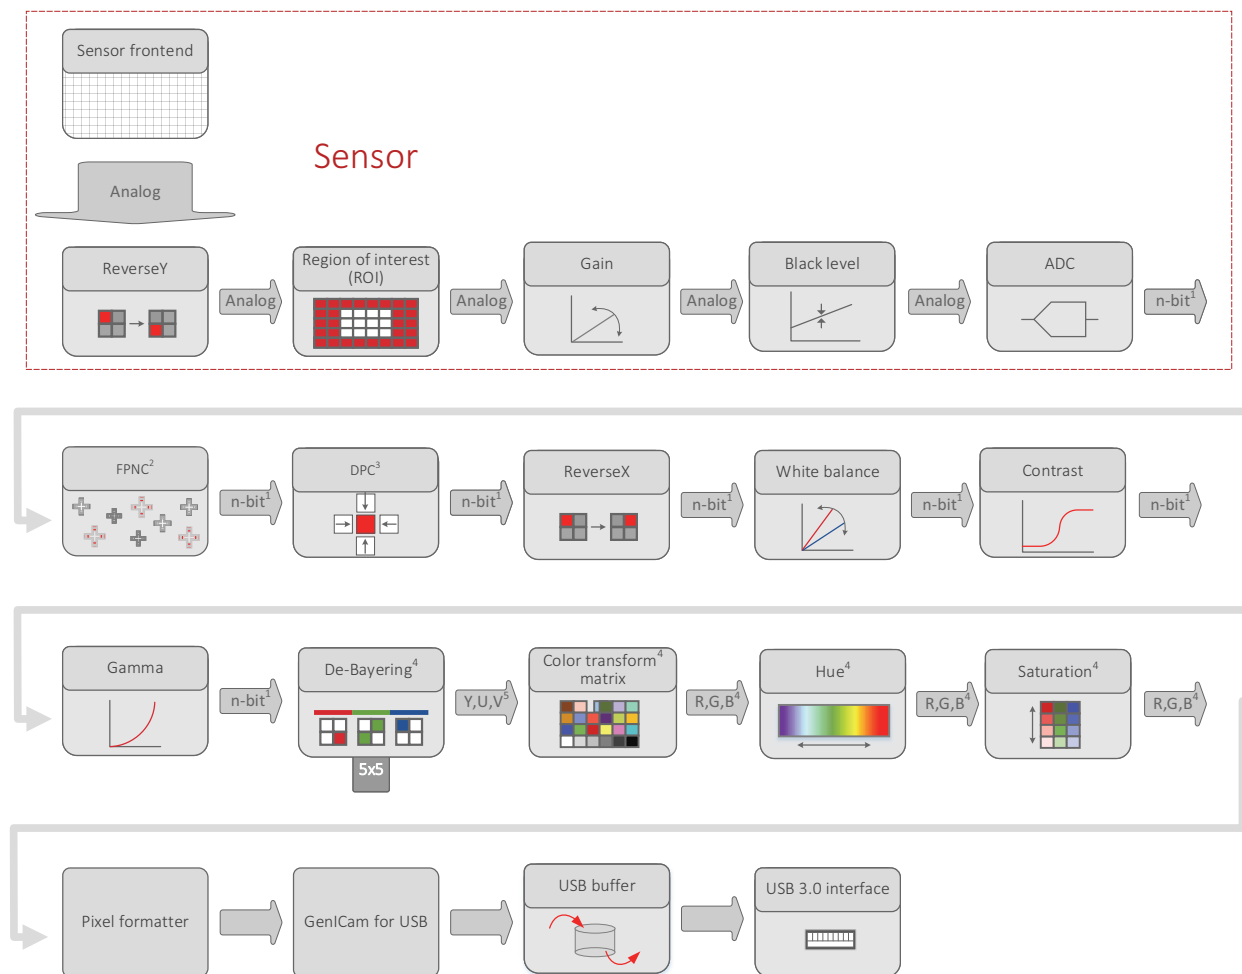

¹ Model dependent: See ADC bit depths in [Alvium 1800 U model specifications](#) on page 53.

² Factory preset for FPNC = Fixed Pattern Noise Correction
The current firmware version does not support FPNC for Alvium 1800 U-2050.

³ Factory preset for DPC = Defect pixel correction

⁴ Color models only

⁵ For monochrome models: Y only

Figure 73: Image data flow of Alvium USB cameras



Feature descriptions

The shown functionalities represent features or groups of features that are described in the Alvium Features Reference. See www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation for details.

Firmware update



This chapter describes how firmware is updated on Alvium USB cameras.

Please note

You should update firmware only to change camera functions or fix known issues.

Consider: Any firmware update may not only add new features to a camera or fix known issues. It may also replace previous features or change camera characteristics. See firmware release notes for details.



Keep the camera connected

- Keep the camera and the computer running while you are executing a firmware update.
- If the camera is powered down during firmware update, the camera firmware may get into a non-functional state.

Firmware update with Vimba

We recommend you to install **Vimba** completely.



Vimba Driver Installer

Windows: By default, **Vimba Driver Installer** is installed as well.

1. Download and install **Vimba**.
The download includes the **Vimba Firmware Updater** and the Vimba Manual.
2. To update the firmware, follow the instructions of the Vimba Manual.



Downloads

- For Vimba, see www.alliedvision.com/software.
- For firmware updates, see www.alliedvision.com/en/support/firmware.

We recommend you to use the **Vimba Firmware Updater** for easy handling. If you want to update the firmware without installing **Vimba**, please contact support@alliedvision.com.

If firmware update fails,

- The camera is shown as “Fallback” on the USB bus.
- The camera is not recognized by **Vimba Viewer**.
- You can repeat the firmware update.

Should the firmware update not succeed, please contact support@alliedvision.com.

Performance and troubleshooting



This chapter includes:

Optimizing performance	172
Troubleshooting common issues	183

Optimizing performance

Image transfer with rolling shutter cameras

Affected models: **Alvium 1800 U-500m/c, U-501m NIR, U-1240 m/c, and U-2050m/c**

If acquisition is started and stopped in a short sequence, no image is transferred to the host. The duration cannot be predicted, because it depends on various factors.

Frame rate jitter

Affected models: **Alvium 1800 U-500m/c, U-501m NIR, U-1240 m/c, and U-2050m/c**

Generally, some parameters can be changed during exposure without affecting the timing. When the camera is operated in freerun mode without triggering, changing parameters during exposure leads to frame rate jitter.

When parameters are entered, the next frame starts only after readout and sensor reconfiguration delay are finished. When the camera is run in **ExposureAuto** mode, the actual frame rate is less than the calculated value for the corresponding exposure time. Consider frame rate jitter for your application.

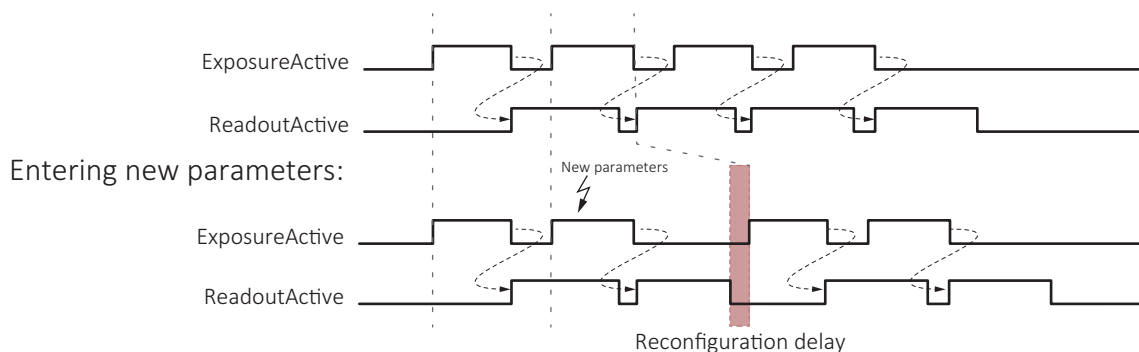


Figure 74: Delayed exposure due to parameter changes

Feature value changes on a streaming camera

Only some features can be adjusted while the camera is streaming, these include:

- AcquisitionFrameRate
- BalanceWhiteAuto
- BlackLevel
- ExposureAuto
- ExposureTime
- Gain
- GainAuto
- OffsetX
- OffsetY

This list is not complete and will be updated in future document versions.



Latencies

Consider that value changes become effective with latencies based on the sensor and its operation mode (triggered or free run, shutter mode, frame rate).

Value changes by feature interdependencies

The conversion between time and clock cycles affects control values. Features for pixel format, bandwidth, ROI, exposure time, and triggering are related to each other. Changing values for one feature can change values for another feature. For example, frame rates can be reduced when **PixelFormat** is changed subsequently. [Figure 75](#) shows the interdependencies.

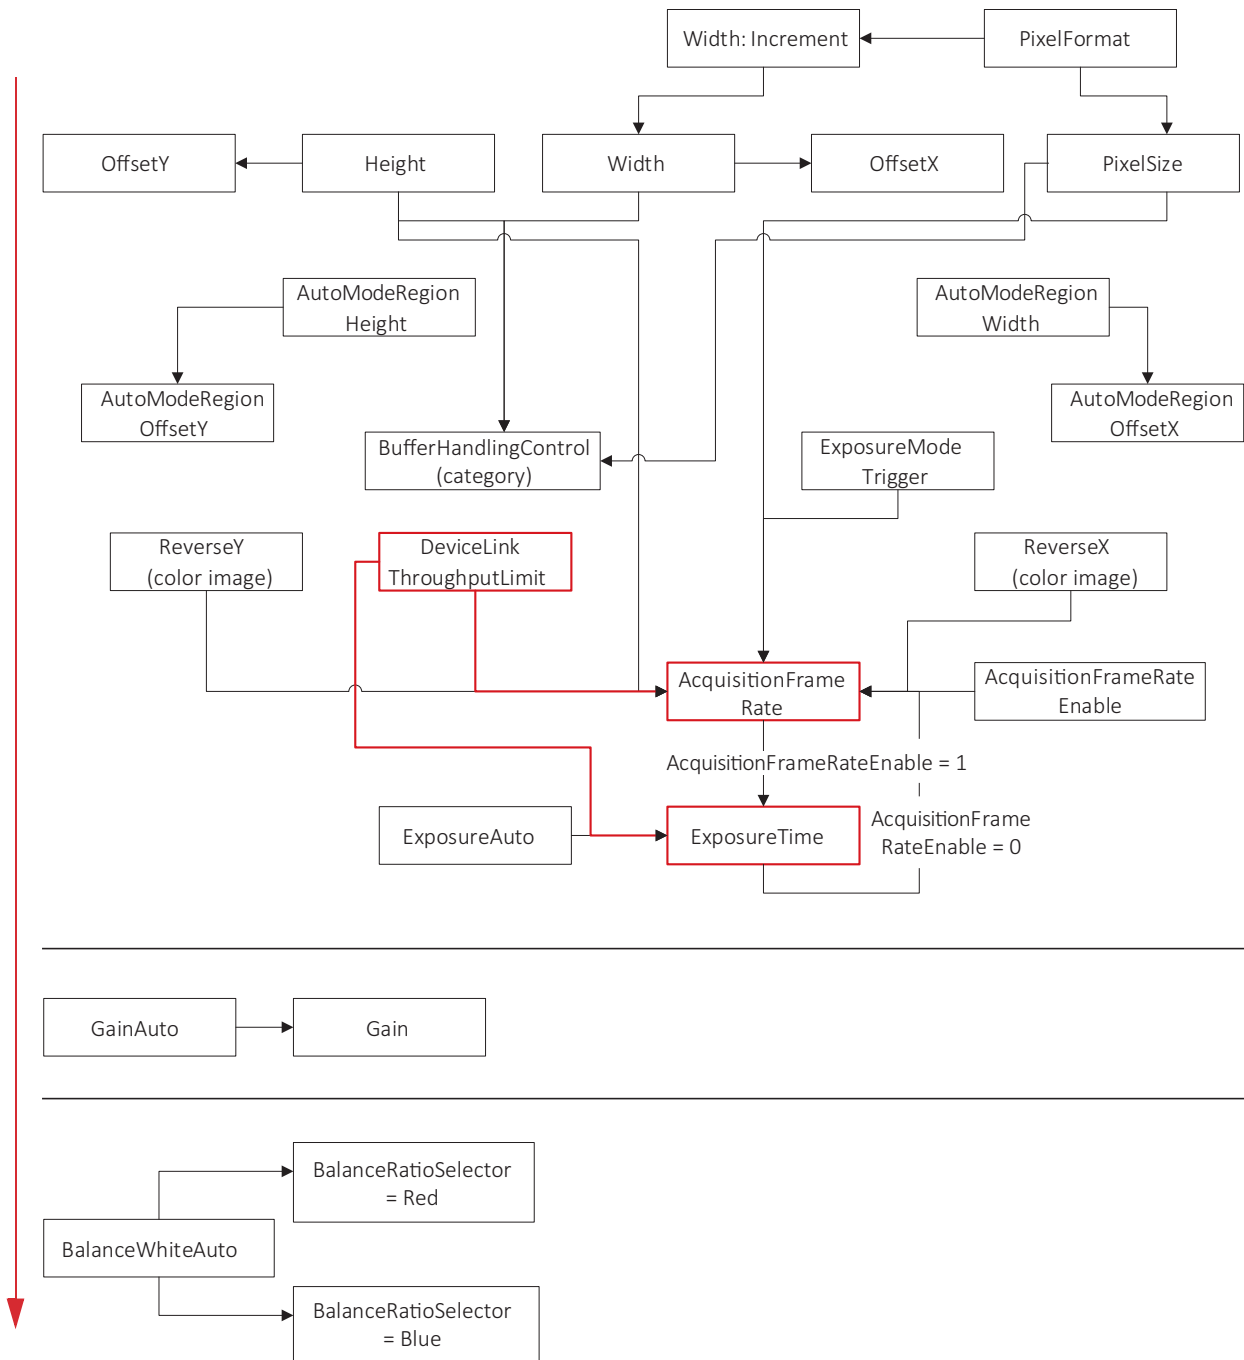


Figure 75: Interdependencies between features

Effects for the interdependent features

Changing one control's value affects other control's values, such as:

If: **Height** value is changed.

Then: Other values may be affected, such as for **AcquisitionFrameRate** and **ExposureTime**.

We recommend you to consider:

- The more features you adjust, the more current values deviate from previously set values.
- The same effects that apply to **ExposureTime**, also apply to **AutoExposure**.
- To avoid readjustments, apply settings in the order shown in [Figure 75](#).

Impact by other features

Input	Output	
	Exposure time values	Frame rate
AcquisitionFrameRate	Not affected	Affected
ExposureTime	Affected as expected	Affected
DeviceLinkThroughputLimit	Affected	Affected
Height	Not affected	Affected
Width	May be affected	May be affected

Table 80: Impact by other features

Dark current compensation

All sensors accumulate dark current in the pixels. Dark current increases the signal level and black level. Most sensors in Alvium USB cameras compensate for this.

For **Alvium 1800 U-050m/c** with the ON Semi PYTHON 480 sensor, see [Black level compensation for 1800 U-050m/c](#) on page 177.

If cameras are operated at high temperatures or long exposure times, compensation reaches its limits. The typical compensation mechanism uses a **margin** to compensate for dark current. This works only until dark current reaches the size of the margin. The following table shows the relation of the margin and accumulated dark current for a pixel in 8-bit mode with a maximum value of 255.

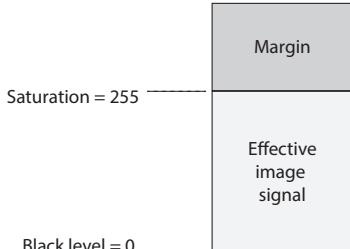
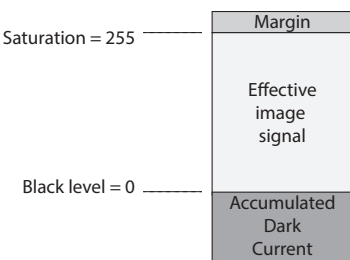
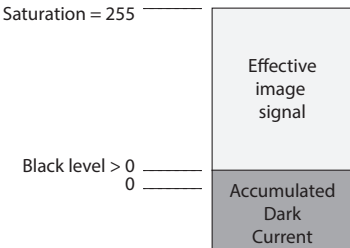
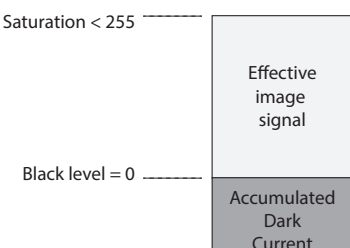
Effective signal versus noise	Description
	<p>The pixel has accumulated no dark current, the margin has maximum size.</p>
	<p>The pixel has accumulated some dark current, reducing the size of the margin.</p>
<p>The following images show a pixel that has accumulated a higher dark current than the margin.</p>	
	<p>The pixel has accumulated dark current, the margin reduces to 0.</p> <p>Type 1 compensation</p> <ul style="list-style-type: none"> Dark current compensation is stopped. Dark current increases the black level. Fixed pattern noise increases.
	<p>The pixel has accumulated dark current, the margin reduces to 0.</p> <p>Type 2 compensation (Typically used for sensor-internal compensation, often in the analog domain.)</p> <ul style="list-style-type: none"> Dark current compensation stays active. Maximum saturation signal decreases. Fixed pattern noise increases.

Table 81: Accumulated dark current affecting the effective image signal

Additional compensation

If compensation limits are reached and you cannot decrease operating temperature or exposure time, what can you do to keep signal quality high?

Measures for type 1 compensation

Alvium 1800 U-050m/c supports compensation type 1. For additional compensation, see [Black level compensation for 1800 U-050m/c](#) on page 177.

Typically, there is no measure to improve the image signal.
The rising black level shifts black and dark gray values to gray.

Measures for type 2 compensation

All other Alvium camera models support compensation type 2.

You can increase the margin size by using gain, with the following side effects:

- To give space to a larger margin, the effective pixel capacity decreases.
- White and light gray values are shifted down to gray.

Black level compensation for 1800 U-050m/c

Because the ON Semi PYTHON 480 sensor does not have a dark current compensation, **Alvium 1800 U-050m/c** cameras have a typical black level value drift, depending on exposure time and **DeviceTemperature** (measured at the mainboard). The black level compensation adjusts this effect as shown in [Table 82](#).

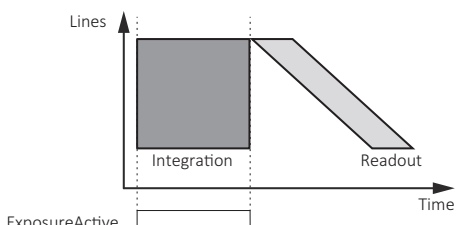

Temperature [°C]	ExposureTime [ms]							
	1	10	50	100	250	500	750	1,000
35								
40								
45								
50								
55								
60								
65								
70								
75								
	Full compensation							
	Partial compensation							

Table 82: Exposure time and temperature affecting black level compensation

Should additional compensation be needed, we recommend cooling the camera.

Shutter types affecting image readout

Some Alvium USB camera models are operated using global shutter (GS):

Property	Line readout	Moving image
Global shutter (GS)		

Other models use rolling shutter (RS). Alvium 1800 U-2050 models with Sony IMX183 sensor offer global reset shutter (GRS) in addition:

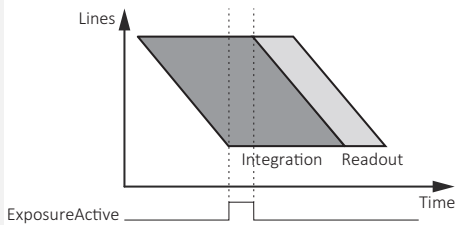
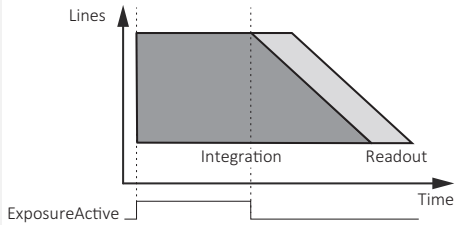

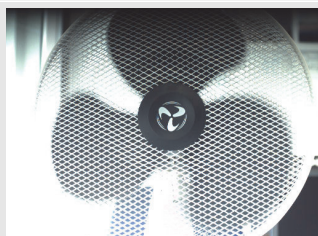
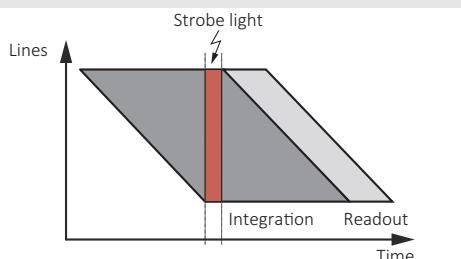
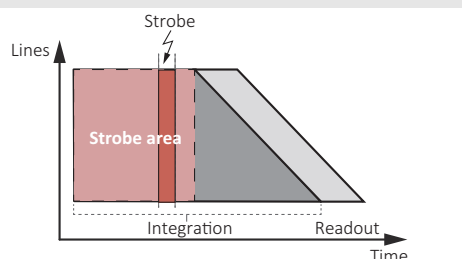
Property	Rolling shutter (RS)	Global reset shutter (GRS)
Line readout		
Line exposure start	Deferred from line to line	Common for all lines
Line exposure time	Common for all lines	Increases from line to line
Image acquisition of moving objects		
Image brightness	Constant over the image	Varying over the image
Moving objects	Distorted shape	Shape without distortion
Typical application	Static objects	Moving objects
Compensation	Use an additional mechanical shutter or use a strobe light:	
		

Table 83: Shutter types affecting image readout

Operating systems and bandwidth

If the camera data output exceeds the bandwidth supported by the host computer, images may be corrupted. This section gives some background information to enable proper image transfer.

Sensor data output and camera data output

For cameras with an image buffer, the required bandwidth for image acquisition can be estimated for a given frame rate, pixel format, and resolution by over-the-thumb calculations. Alvium cameras do not have an image buffer.

Figure 76 shows the bandwidth for a higher (1) and a lower (2) value for `DeviceLinkThroughputLimit`.

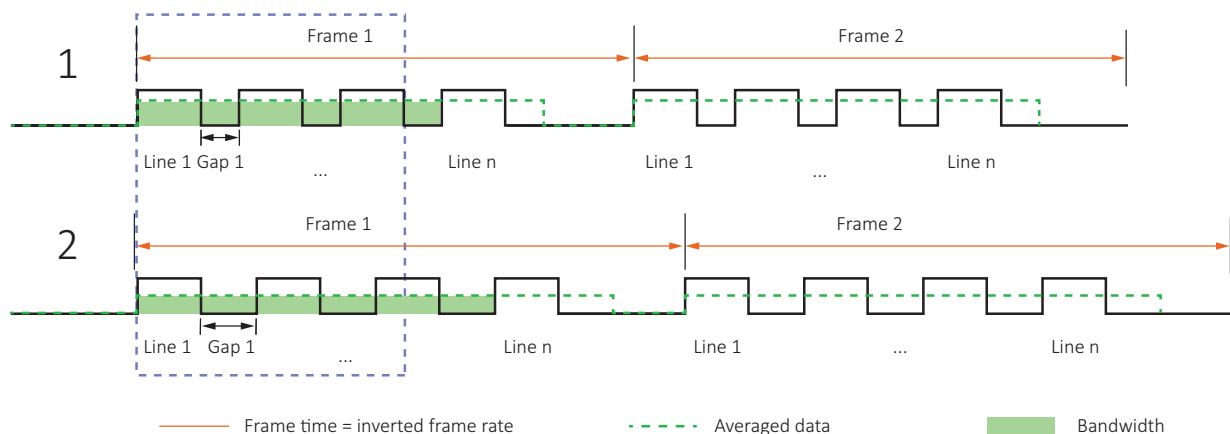


Figure 76: Sensor data output and camera data output

- Cameras **without** an image buffer like Alvium: Data is averaged over the line time.
- Cameras **with** an image buffer: Data rate is averaged over the frame time.
- Using `DeviceLinkThroughputLimit`: Reduced the maximum line data rate.

`DeviceLinkThroughputLimit` controls the maximum bandwidth of the data streamed out by the camera. When the value for this feature is reduced, the gaps between the lines are increased. This reduces the frame rate and therefore the bandwidth.

Additionally, you may reduce the frame rate to reduce bandwidth.

Consider that **Vimba Viewer** does not gray out values that exceed the bandwidth supported by the host computer.



More information on `DeviceLinkThroughputLimit`

For more information on `DeviceLinkThroughputLimit`, see the Alvium Cameras Features Reference at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation.

Hardware and bandwidth

For a smooth data transfer of USB3 Vision cameras, the host computer must be equipped with a high-bandwidth USB controller. Hubs should support high bandwidths as well.



Suitable USB 3.0 accessories

See www.alliedvision.com/en/products/accessories for suitable USB 3.0 or 3.1 Gen 1 host controller cards and cables or contact your Allied Vision Sales representative.

Vimba settings

During freerun, Alvium cameras do not automatically adapt the frame rate to the USB controller's limits. If the data rate is too high for your USB controller, it receives corrupted frames. The image transfer status in **Vimba Viewer** is signaled as **Running**. However, the corrupted frames are not displayed.

Performance on reference systems

We have tested available frame rates on real systems, using an embedded board and a desktop PC. Cameras were operated in `AquisitionMode = Continuous`, frame rates were measured using **Vimba Viewer**.

Hardware and software

Camera	Specification
Model	Alvium 1800 U-500c
Firmware version	1.0.25857

Table 84: Camera model and firmware

System component	Linux desktop system	Linux embedded system
Mainboard	Dell Precision T5600	NVIDIA Jetson TX2
CPU	Intel Xeon E5-2609 0 (4 cores)	ARMv8 (2x rev 0, 4x rev 3, 4 cores)
CPU frequency	2.40 GHz	2.0 GHz
RAM	8 GB	8 GB
Graphics controller	NVIDIA Quadro NVS 295	On-board
USB controller	ExSys EX-11092-2 (upper PCIe port)	On-board
Operating system	Ubuntu 18.04 64-bit, Kernel 4.15	Ubuntu 16.04 64-bit, Kernel 4.4

Table 85: Host computer hardware and operating system

Operating system and feature values

Feature	Linux desktop system	Linux embedded system
DeviceLinkThroughputLimit ¹	400000000 (400 MBps)	450000000 (450 MBps)
MaxTransferSize ²	262144	
MaxTransferCount ²	31 (default)	
¹ Camera feature		
² VimbaUSBTL.xml		

Table 86: Operating system and feature values

Frame rates and CPU payload

Property	Linux desktop system	Linux embedded system
Pixel format	RGB8	
Image size	2592 × 1944	
Frame rate	25.7 fps	28.6 fps
CPU payload	30% (4 cores)	50% (4 cores)

Table 87: CPU payload for RGB8

Property	Linux desktop system	Linux embedded system
Pixel format	Mono8	
Image size	2592 × 1944	
Frame rate	67.5 fps	67.5 fps
CPU payload	35% (4 cores)	55% (4 cores)

Table 88: CPU payload for Mono8

Dividing bandwidth between devices on a common USB 3.0 or 3.1 Gen 1 bus

Ideal setup for two cameras

Preconditions

- Control traffic is ignored.
- The possibility of the host being busy with other tasks is ignored.
- Cameras share 100 percent bus bandwidth.
- Cameras need 100 percent bus bandwidth in total.
- Cameras stream in the same way because they are the same model and have identical settings.
- No other device is connected.

Result

- Bandwidth is divided by two, cameras get assigned 50 percent bandwidth each.
For three cameras, the bandwidth is 33.3 percent each.
- If one camera sends no data, the other camera will be assigned 100 percent bandwidth. To always assign 50 percent to both cameras, they have to be controlled to use no more than 50 percent bandwidth each.
- If the computer cannot process the images received from a camera, images are corrupted.

Best practice for bandwidth management

- To assign maximum bandwidth to a camera, make sure your camera is the only device on the bus.
- Avoid devices, such as a monitor or a mouse, sharing bandwidth with the USB camera connected to the same bus.
- For maximum bandwidth, use a current version host controller card.
See the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.
- USB3 Vision devices use bulk transfer. Avoid using other transfer modes.
- Control bandwidth by assigning the desired amount to the separate cameras.

Cascading hubs divide bandwidth

The following example applies to standard behavior without individual settings. The graphics show bandwidth distribution on a common bus. Three cameras try to use full bandwidth at the same time. If one camera is inactive, the host will provide its share to the others until this camera sends data again.

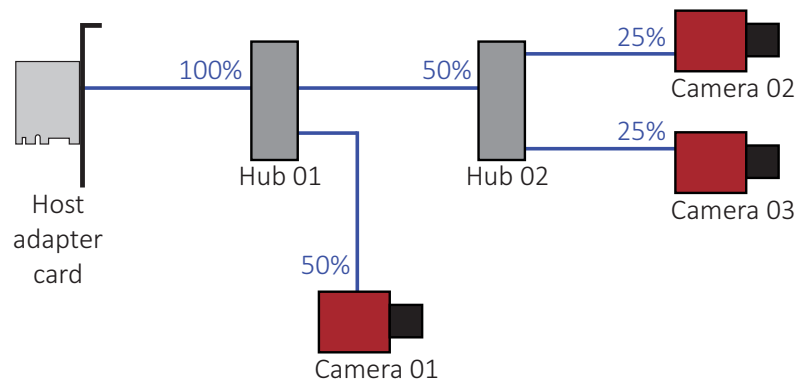


Figure 77: Bandwidth assignment for cascading hubs

Troubleshooting common issues

This section is about unexpected events with the operation of Alvium USB cameras. The events are ordered from general to detail:

- [Camera recognition](#)
- [Unexpected events](#)
- [Performance](#)
- [Radio signal interference](#)

Each entry consists of:

- Observed unwanted event, numbered for easier handling
- Short description of the solution
- Step-by-step instructions to resolve the issue.



Hardware installation

For background information, see [Installing the camera](#) on page 142.

Camera recognition

How can I make the computer and Vimba Viewer recognize the camera?

1. Check if the **hardware** supports your USB camera.
See the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Windows only

2. Check if your computer has an appropriate **USB 3.0 or 3.1 Gen 1 host controller driver** installed.

Windows 8 and later OS provide a USB 3.0 or 3.1 Gen 1 host controller driver. On a properly installed OS, no problems should occur.

Windows 7 and earlier OS do not provide a USB 3.0 or 3.1 Gen 1 host controller driver.

To install the host controller card:

Download the manufacturer USB 3.0 or 3.1 Gen 1 host controller driver.

Install the driver on your computer.

Result: The installed driver enables the host controller.

Windows only

3. Check if the **USB3 Vision device driver** is properly installed and assigned to the camera.

Follow the instructions in [Installing the host adapter and Vimba](#) on page 153.

4. The camera, **connected to a USB 3.0 or 3.1 Gen 1 hub**, is not recognized anymore. Check if the USB 3.0 or 3.1 Gen 1 hub has crashed.

 1. Disconnect the USB and power supply cable from the hub.
 2. Reconnect both.

Result: The camera is recognized again.

5. The camera, **connected directly to the computer**, is not recognized anymore. Check if a hub included in the **USB host controller** has crashed.

 1. In the **Device Manager**, deactivate the host controller.
For **Windows**, see [Installing the camera driver with Windows tools](#) on page 155.
 2. Reactivate the host controller.

Result: The camera is recognized again.

Unexpected events

How do I get the camera back to normal operation?

1. Check if an error is shown by the **camera Status LED**.
If: The status LED signals four short flashes followed by another sequence.
Then: Restart the camera.
If: If the status LED again signals four flashes.
Then: Please contact support@alliedvision.com.
2. Check if **power cables**, such as cables with a high current in the environmental setup, **harmfully interfere with camera cables**.
If: Any camera cable crosses or goes parallel with a power cable.
Then: Separate camera cables from power cables.
3. Make sure the **camera is intact**.
For this, exclude issues of the cable or the connected computer:
 1. Connect the camera with a **different cable** to a **different computer**.
If: The camera works properly.
Then: The camera is intact, but your previous computer or cable has a defect. Continue with 2.
If: The camera does not work properly.
Then: Most likely, the camera has a defect. Please contact Allied Vision support.
 2. Connect the camera with the **previous cable** to the **different computer**.
If: The camera works properly.
Then: Replace the cable.
 3. Connect the camera with the **replaced cable** to the **previous computer**.
If: The camera does not work properly.
Then: Check the computer to fix the issue.

Why does the camera not transfer images?

1. The value for **DeviceLinkThroughputLimit** is set higher than the bandwidth supported by the host system.
Then: Check if sufficient bandwidth is assigned to the camera. See [Operating systems and bandwidth](#) on page 179.
2. The camera is **connected to a USB 2.0 port** and requires a bandwidth higher than 50 MBps.
Then: Connect the camera to a USB 3.1. Gen 1 port.

Performance

How can I improve camera performance?

1. Check if the **hardware** sufficiently supports your USB camera.
See the Alvium USB Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.
2. Check if the **camera shares the bus with other devices** reducing the available bandwidth.
Connect the camera to an individual bus, not shared by other devices.
For more information, see [Dividing bandwidth between devices on a common USB 3.0 or 3.1 Gen 1 bus](#) on page 182.
3. Check if the **camera is connected to cascading hubs**, reducing the available bandwidth.
Attach devices directly to a separate USB 3.0 or 3.1 Gen 1 bus. If you want cameras to share a common bus, use only a single hub to attach devices. For more information, see [Dividing bandwidth between devices on a common USB 3.0 or 3.1 Gen 1 bus](#) on page 182.
4. Check if all your USB **accessories support USB 3.0 or 3.1 Gen 1**.
For recommended USB accessories, see the Alvium Cameras Accessory Guide www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Radio signal interference

How can I avoid radio signal interference from wireless devices?

Ensure camera installation complies with **Electromagnetic Compatibility**.

Wireless devices and USB 3.0 or 3.1 Gen 1 commonly use 2.4 GHz frequency (WLAN includes 2.4, 3.6, and 4.9 GHz).

Even USB 3.0 and 3.1 Gen 1 cables can interfere harmfully with other electromagnetic devices. For example, despite shielding, a USB 3.0 or 3.1 Gen 1 cable can interfere with a wireless mouse. Tests have shown an increase of the noise floor up to 20 dB for the affected devices.

- To enable maximum bandwidth, 2.4 GHz radio frequencies must be avoided; therefore, use **maximum shielded cables only**.
- Keep **maximum distance** between your Alvium USB camera setup and interfering devices.
- Use **high-gain antennas** to reduce power of the radio signals.

For tested USB accessories, see the Alvium Cameras Accessory Guide at www.alliedvision.com/en/support/technical-documentation/alvium-usb-documentation under Additional documents.

Index

A

Allied Vision contact17

B

bandwidth

 cascading hubs 183

 division on a common bus 182

 troubleshooting 179

BIOS drivers43

black level compensation 177

C

camera installation

 drivers for camera and host adapter 153

 Windows 152

compliance32

connectors 157

conventions in this document27

current and voltage38

D

dark current compensation 175

document

 conventions27

 history25

 overview14

E

ESD38

exposure delay 172

G

GenICam45

global reset shutter (GRS) 178

global shutter (GS) 178

GPIOs

 input levels 161

 output levels 161

ground loops39

H

hardware assembly

 camera mounting 146

 heat sink mounting 145

 lens mounting 148

heat dissipation36

hubs 183

I

image data flow 168

intended use 35

interfaces 157

IR cut filter 131

L

LED 162

lens mounts 130

lenses 134

 maximum protrusion 42

 mounting 148

P

performance 172

power consumption 52

Q

quantum efficiency 48

R

radio signal interference 187

rolling shutter (RS) 178

S

safety 2, 36

 bare board cameras 40

 BIOS drivers 43

 camera power 38

 electrical connections 38

 GPIOs 39

 ground loops 39

 heat dissipation 36

 lens mounts 36

 maximum protrusion 42

 optical components 41

 PCBAs 38

 sensor 41

 USB cables 40

 USB host controllers and hubs 40

sensor handling 41

sensor position accuracy 132

shock and vibration 45

S-Mount lenses

 focal length versus FOV 136

 mounting 149

specifications 44

support 17

T

triggering 163

troubleshooting 171

camera recognition	184
performance	186
radio signal interference	187
unexpected events	185
typical operation	50, 52

U

USB 2.0	40
USB cables	40
USB host controllers and hubs	40
USB3 Vision	45