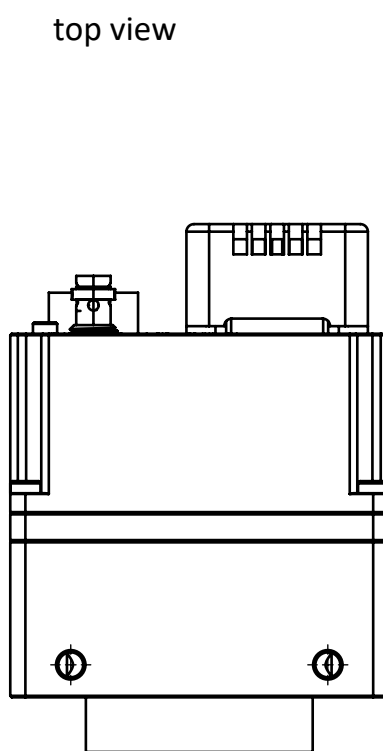
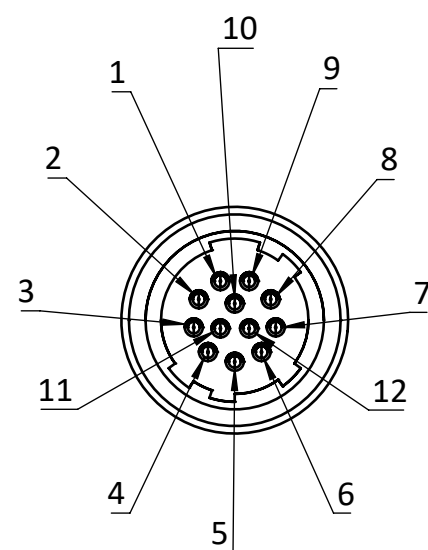




	Hirose Pinout	EXO, HR (CL Deca, CXP), SHR
Pin	Signal	EXO, HR (CL Deca, CXP), SHR
1	V IN- (GND)	
2	V IN+ (10 - 25V)	
3	IN 4 RxD (RS232)	
4	OUT 4 TxD (RS232)	
5	IN 1 (0 - 24V)	
6	IN 2 (0 - 24V)	
7	OUT 1 (open drain)	
8	OUT 2 (open drain)	
9	IN 3+ (opto IN+)	
10	IN 3- (opto IN-)	
11	OUT 3 (open drain)	
12	OUT 0 (open drain)	
	Shielding	



NOTICE:  
The sensor distance 17,526mm is compensated  
for coverglass thickness

 <b>SVS-VISTEK</b>		all dimensions in mm unless otherwise specified		Scale: 1:1		Rev.: 1	
				Customer Interface Drawing			
Name		Sign.		Date			
S.Seiler				09.06.2020			
Checked							
				Material:		Material No.: F002087-01001	
						A2	
				Weight:		Blatt/Sheet 1 / 1	