

REDWOOD™

45MP CAMERAS



CoaXPress

Video Cameras with ON Semiconductor XGS 45000 Sensors

APPLICATIONS

Automated Optical Inspection

Wide Area Observation

Virtual Reality and Special Effects

Scientific Research



FEATURES INCLUDE:

- Monochrome and Color Models
- High Resolution with High Speed Output
- Advanced Global Shutter CMOS Sensor
- Fast CoaXPress 2.0 Video Output
- Selectable 8/10/12-bit Data Formats
- Multiple Lens Mount Options
- Multi-ROI with up to 16 Separate Windows
- Flexible Image Adjustment and Enhancement

IOI
IO INDUSTRIES

SPECIFICATIONS

Camera Model	Redwood 45MP CXP
Sensor Size (H x V)	8192 x 5468 (44.7 MP)
Frame rate (full resolution)	52 fps (8-bit), 52 fps (10-bit), 47 fps (12-bit)
Optical Format	Super 35 (31.5 mm diagonal)
Sensor Type	CMOS w. global electronic shutter
Sensor Options	Monochrome or color (Bayer)
Pixel Size	3.2 x 3.2 μ m
Dynamic Range	67.5 dB (up to 73dB with dual gain HDR)
Output Configurations	1/2/4 links at 3.125 / 5.0 / 6.25 / 10.0 / 12.5 Gbps (4x HD-BNC connectors)
Multiple ROI / Binning	Up to 16 windows with optional 2x2 binning, or with full-size window 1/2 subsampling can be used
Pixel Bit Depth	8/10/12-bit output
Exposure Control	Trigger width, timed or auto-exposure
Image Correction	Black level, FPN, bad pixel replacement, FFC, denoise filter, detail enhancement filter
Color Processing	White balance (Auto one-shot, tracking, or manual), Black balance (auto or manual), Gamma LUTs
Camera Configuration	GenICam or Redwood Control software
Mechanical/Electrical	
Dimensions	62.0 mm x 62.0 mm x 154.7 mm (WxHxD, with F-mount)
Lens Mount	F-mount, M52 x 0.75 or Active Canon EF-mount
Weight	715 g (with F-mount, no lens)
Power Requirements	Approx. 12W @ 12V DC via Hirose 6-pin or 13.5W @ 24V via PoCXP (2 PoCXP links required)
Additional I/O (Hirose 12-pin)	TTL-level trigger input/output
Operating Temperature	-10°C to 50°C, 20-85% humidity (non-condensing)
Storage Temperature	-40°C to 85°C, 10-90% humidity (non-condensing)

ORDERING




Example: 447X52MCX-F

Camera	Lens Type
447X52	F - F-mount
	M - M52 x 0.75 (18.92mm flange focal distance)
	A - Active EF-mount
Sensor Type	Interface
M - Monochrome	CX - CoaXPRESS
C - Color (with IR filter)	

FRAME RATE CHART

Example Output Resolution:	CXP Connection:	ADC Mode: Output:	10-bit		12-bit		
			8-bit	10-bit	8-bit	10-bit	12-bit
Maximum (8192 x 5468)	4x CXP-12	52	52	47	47	47	
	2x CXP-12 / 4x CXP-6	52	41	47	47	34	
	2x CXP-10 / 4x CXP-5	38	30	38	30	25	
	1x CXP-12 / 2x CXP-6 / 4x CXP-3	26	20	26	20	17	
Maximum 1:1 (5440 x 5440)	4x CXP-12	52	52	48	48	48	
	2x CXP-12 / 4x CXP-6	52	52	48	48	48	
	2x CXP-10 / 4x CXP-5	39	31	39	31	26	
	1x CXP-12 / 2x CXP-6 / 4x CXP-3	52	46	48	46	38	
8K UHDTV2 (7680 x 4320)	4x CXP-12	65	65	60	60	60	
	2x CXP-12 / 4x CXP-6	65	56	60	56	46	
	2x CXP-10 / 4x CXP-5	35	28	35	28	23	
	1x CXP-12 / 2x CXP-6 / 4x CXP-3	51	41	51	41	34	

MECHANICAL DIAGRAMS

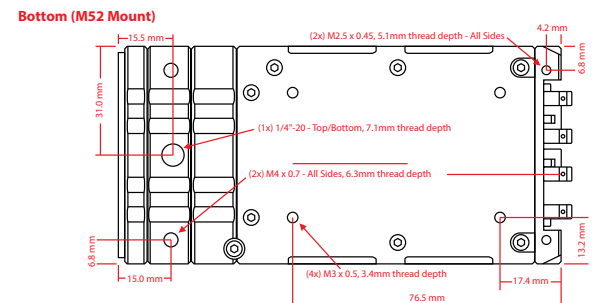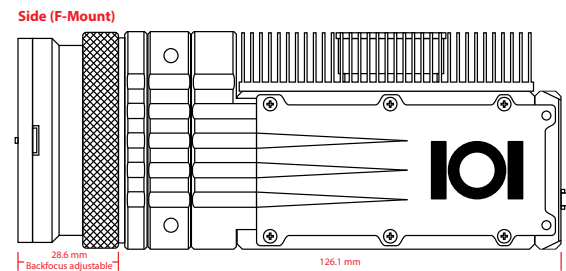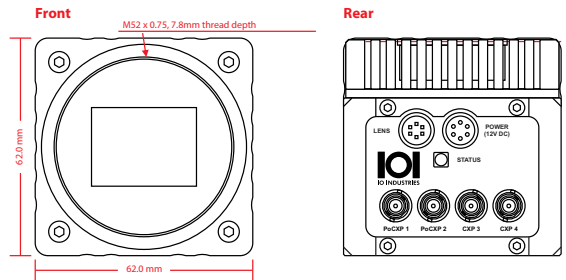

Visit us at: www.ioindustries.com
 15940 Robin's Hill Road
 London, Ontario, Canada, N5V 0A4
 Tel: +1 519 663 9570
 Email: sales@ioindustries.com

LET'S STAY CONNECTED!



@IOINDUSTRIES



@IOINDUSTRIES



@IO-INDUSTRIES

Copyright © 2021 IO Industries Inc. Redwood is a trademark of IO Industries. All other trademarks are the property of their respective owners.

Datasheet Rev. 1.0 (01/15/2021)
 Specifications subject to change without notice