



SCAN ME

PRELIMINARY

MIKROTRON

High-Speed Vision Solutions

GEN*i*CAM

CoaXPress
The next generation digital Interface

CXP-12



*picture similar

EoSens[®] 21CXP2

Engineered for
highest
Performance

EoSens[®] 21CXP2 Key Features:


- More than 230 fps @ 21MPix resolution
- High sensitivity
- Fast CoaXPress-12 interface
- Precise triggering
- 80 x 80 x 72.8 mm small

EoSens® 21CXP2


PRELIMINARY

Dimensions [mm]


Back view

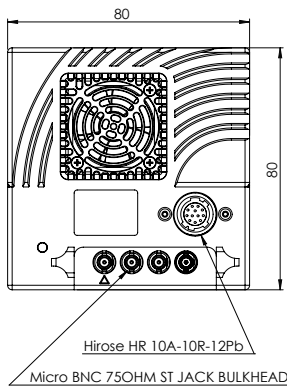

Side view w/n mount

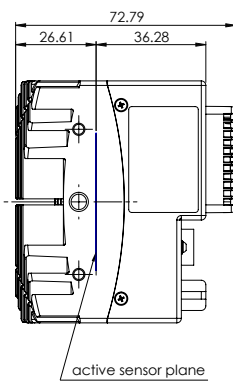

Side view w/ F mount

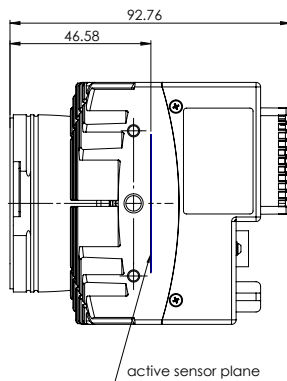

Performance

The EoSens®21CXP2 is engineered for the highest Performance. Featuring a high-speed CMOS sensor, the EoSens®21CXP2 offers 5,120 x 4,096 pixel resolution at an out-standing speed of more than 230 fps. This camera takes advantage of the new CoaXPRESS Standard Version 2.0 transmitting data at twice the data rate of Version 1.1. The CXP-12 interface supports data transmission of up to 4 lanes at 12.5 Gbps.

High Sensitivity


The camera's extreme sensitivity delivers high-contrast images even in very low light conditions. This allows to integrate it in applications where lighting is the crucial point.

Smart Features

- CoaXPRESS lanes switchable 1, 2 or 4
- CoaXPRESS V2.0: Supported link speed 3.125/6.25/10/12 Gbps
- CoaXPRESS 1.1 downward compatible
- Analog and Digital Gain Adjustment
- In-Image frame counter and timestamp
- ROI supported with frame rate increase image height reduction
- Direct GPIO on camera accepting LVTTTL-24V
- Defect Pixel Correction
- Excellent image quality

Specifications	EoSens® 21CXP2
Resolution	21 MP
Active Pixels	5,120 x 4,096 px
Interface	CXP @ 4 x 12.5 Gbit/s
Frame Rate, 8 bit	> 230 fps
Sensor Type	CMOS (Global Shutter)
Sensor Format Ø	29.5 mm
Pixel Size	4.5 x 4.5 µm
Sensitivity	TBD
Pixel Data Width	12 / 10 / 8 bit
Dynamic Range	> 65 dB
Shutter Time / Steps	1 µs
Shutter Time / Range	20 – 100 µs
Max. Jitter via CXP Trigger	±4 ns
Mount Options	F mount
Dimensions (W x H x L w/o mount)	80 x 80 x 72.8 mm
Weight with F Mount	630 g
Power consumption	TBD
Power supply	12 – 24 VDC
Camera body temp.	+5 °C ... +50 °C
Shock / Vibration proof	70 g / 7 grms
Conformity	CoaXPRESS / GenICam

Resolution [px]	Frame Rates [fps]
5,120 x 4,096	230
4,096 x 3,072	305
5,120 x 1,024	892
2,560 x 128	5,582

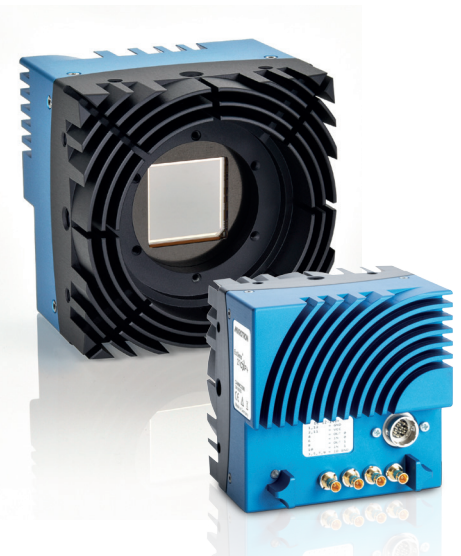

*picture similar

GENiCAM CoaXPRESS The next generation digital interface CXP-12



Markets and Application Examples

Factory Automation	Laser Triangulation
Traffi & Logistics	PCB Inspection
Sports & Entertainment	Particle Image Velocimetry
Medical & Life Science	Metrology

TKH GROUP member of the TKH Group



All trademarks are properties of their respective owners. MIKROTRON reserves the right of change without notice. MIKROTRON is not liable for harm or damage incurred by information contained in this document.

MIKROTRON
High-Speed Vision Solutions

Germany
Landshuter Str. 20-22
85716 Unterschleissheim
T.: +49(0)89-726342-00
www.mikrotron.de
info@mikrotron.de

USA
14032 Hermosillo Way
US-Poway, CA 92064
T.: +1-858-774-1176
www.mikrotron.de/en
steve.farell@mikrotron.de



SCAN ME