



- AR0521 CMOS sensor
- GigE Vision
- High bandwidths
- 3 lens mount options

Model without hardware options

### **Alvium G5 - Speed up your vision application**

5GigE Vision camera for demanding applications

Alvium G5-500 with ON Semi AR0521SR runs 68.0 frames per second at 5.0 MP resolution.

The Alvium G5 camera series combines the advantages of the 5GigE interface for higher bandwidth and the flexibility of the Alvium platform offering various mount and sensor options. It enables an easy upgrade of existing systems (USB3 Vision or GigE Vision) and offers backwards compatibility with 1000BASE-T solutions. Powered by ALVIUM® Technology, the sugar cube Alvium G5 camera delivers highest image quality at a low power consumption.

Easy software integration with **Vimba X** and compatibility to the most popular third party image-processing libraries.

## Specifications

Interface	IEEE 802.3: 5GBASE-T or 2.5GBASE-T (NBASE-T) and 1000BASE-T, IEEE 802.3af Power Class 0 PoE
Resolution	2592 (H) × 1944 (V)
Spectral range	300 to 1100 nm
Sensor	ON Semi AR0521SR
Sensor type	CMOS
Shutter mode	RS (Rolling shutter)
Sensor size	Type 1/2.5
Pixel size	2.2 μm × 2.2 μm
Lens mounts (available)	C-Mount, CS-Mount, S-Mount
Max. frame rate at full resolution	68 fps at ≥375 MByte/s, Mono8
ADC	10 Bit
Image buffer (RAM)	512 MByte
Non-volatile memory (Flash)	1024 KByte

### Imaging performance

Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured without optical filter.

Quantum efficiency at 529 nm	79 %
Temporal dark noise	5.9 e <sup>-</sup>
Saturation capacity	9890 e <sup>-</sup>
Dynamic range	63 dB
Absolute sensitivity threshold	7.1 e <sup>-</sup>

### Output

Bit depth	10-bit
Monochrome pixel formats	Mono8, Mono10, Mono10p, Mono12, Mono12p, Mono12Packed
YUV color pixel formats	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	RGB8 (default), BGR

Raw color pixel formats (Bayer) BayerGR8, BayerGR10, BayerGR10p, BayerGR12, BayerGR12p, BayerGR12Packed


### General purpose inputs/outputs (GPIOs)

TTL I/Os	2 GPIOs (LVTTL)
Opto-isolated I/Os	1 input, 1 output

### Operating conditions/dimensions

Operating temperature	-20 °C to +60 °C housing temperature
Power requirements (DC)	10.8 to 26.4 VDC AUX   IEEE 802.3af, Power Class 0 PoE
Power consumption	External power: 5.5 W at 12 VDC (typical)   Power over Ethernet: 6.3 W (typical)
Mass	100 g
Body dimensions (L × W × H in mm)	60 × 29 × 29

## Quantum efficiency

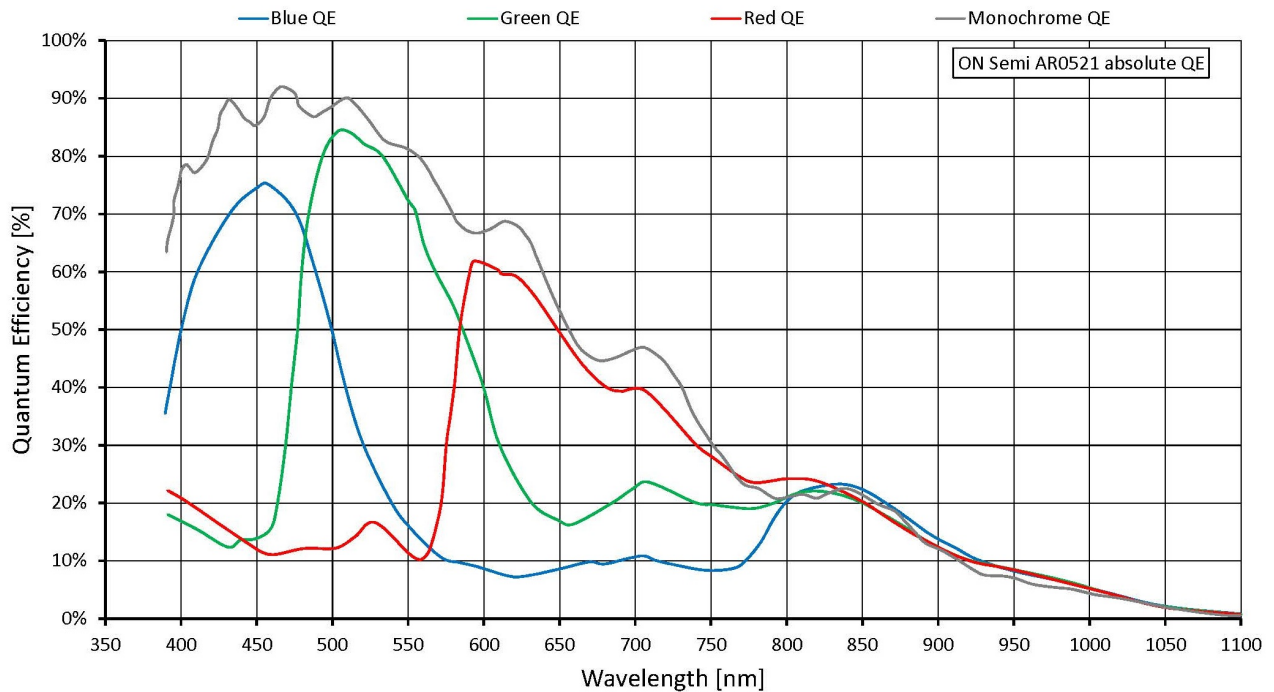

## Features

### Image control: Auto

- Auto exposure
- Auto gain
- Auto white balance (color models)

### Image control: Other

- Adaptive noise correction
- Binning (digital)
- Binning (digital, sensor)
- Black level
- Color transformation (incl. hue, saturation; color models)
- Contrast
- Custom convolution
- De-Bayering up to 5×5 (color models)
- DPC (defect pixel correction)
- FPNC (fixed pattern noise correction)
- Gamma
- Lens shading correction
- LUT (look-up table)
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur

### Camera control

- Acquisition frame rate
- Action commands, incl. ToE (trigger over Ethernet)
- Bandwidth control
- Burst mode
- Counters and timers
- Event channel
- Firmware update in the field
- I/O and trigger control
- Image chunk data
- Power Saving Mode
- PTP (IEEE 1588 Precision Time Protocol)
- Serial I/Os
- Temperature monitoring
- User sets

Technical drawing

